


BIS M-810-0-003

Handyprogrammer

BALLUFF
sensors worldwide

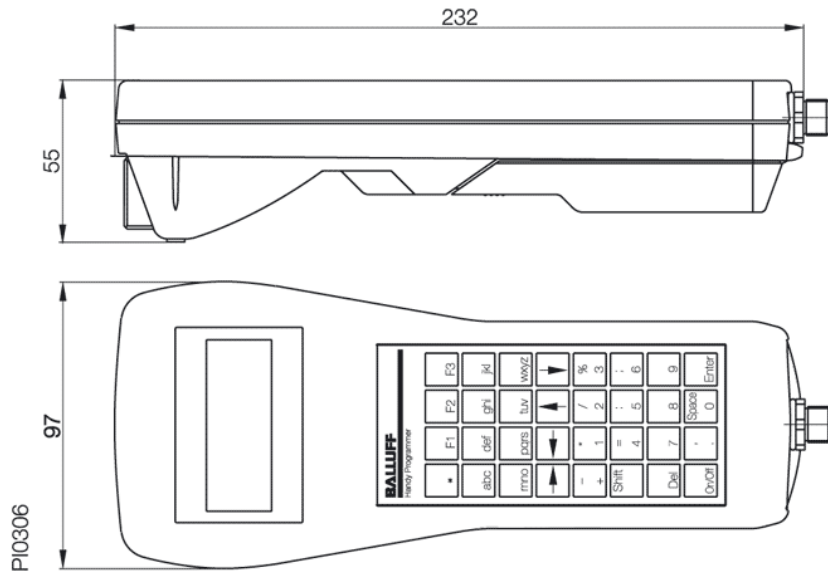

Electrical data:

Interface RS232/Balluff Dialog
Current draw 2, 4V Accupac NiMH

Mechanical data:

Operating temperature 0...+50 °C
Housing material ABS

General data:

Display LCD-Display, 20 characters / 4 Rows
Function read/write
Capacity 1650mA/h
Read head connection integrated antenna
Keyboard 32 keys alphanumeric

www.balluff.com

Balluff Europe: +49 7158 173 -0
Balluff USA: 1-800-54 3-83 90
Balluff Asia: +86 21-50 64 41 31

Online Productinformation
2009-02-03