

Amazon

Single Chip ADSL2/2+ CPE Solution
PSB 50510



Infineon's Amazon PSB 50510 is a highly integrated, single-chip solution for ADSL2/2+ modems, routers and home gateways. With an embedded processor, analog front end and line driver, Amazon provides the core of an ADSL CPE system. Amazon integrates multiple interfaces allowing seamless connectivity with Infineon's extensive suite of home networking chips and third party solutions, offering customers a flexible and scalable platform on which to build a wide range of systems.

Amazon is the ideal CPE counterpart to Infineon's market-leading GEMINAX MAX ADSL2/2+ multi-channel Central Office chip set for a complete end-to-end ADSL2/2+ solution.

In order to shorten time to market and reduce development costs, the PSB 50510 is offered with a complete development kit consisting of reference designs, documentation and a complete networking software stack based upon the Linux® operating system.

Applications

Amazon can be used stand-alone or together with Infineon's home networking ICs to create a wide range of products from simple ADSL Ethernet bridges up to advanced ADSL Home or Small Office Home Office (SOHO) gateways that support WLAN and VoIP.

ADSL Modem Features

- Supported Standards
 - ITU-T G.992.3 (ADSL2) Annexes A, B, C, I, J, K, and L
 - ITU-T G.992.5 (ADSL2+) Annexes A, B, I, J, and L
 - ITU-T G.992.1 (G.dmt) Annexes A, B, and C
 - ITU-T G.992.2 (G.lite) Annexes A and C
 - ANSI T1.413 Issue 2
 - DTAG UR2 and ETSI standards for ADSL over ISDN
 - Conforms to DSL Forum performance specifications TR-048
- Data Rates up to 24 Mbit/s downstream and 2 Mbit/s upstream
- Echo cancellation (Spectrum Overlap support)

ATM Features

- I.363.5 Compliant AAL5 SAR with hardware accelerator
- TC layer with hardware accelerator
- 16 ATM VCs support
- I.610 OAM F4/F5 loopback
- Auto-configuration support per ILMI and DSL Forum TR-037
- ATM Traffic Management/Shaping: CBR, VBR-rt, VBR-nrt, UBR+ and UBR

Physical Interfaces

- 10/100 Ethernet PHY with Auto MDI-X
- 10/100 Ethernet MAC with MII/Reverse MII interface
- 32/16-bit SDRAM and 16/8-bit Flash memory interface
- 32-bit PCI 2.2 bus supports PCI, Mini PCI and CardBus interfaces
- 16-bit PC Card interface
- SPI
- UART
- Time Division Multiplex (PCM or IOM-2)
- EJTAG/JTAG
- 32 GPIOs

Embedded System

- A 32-bit MIPS 4KEc RISC processor running at 235 MHz
- DMA controller with up to 12 active channels

Analog Front End

- Low noise distortion
- Integrated tunable filters in Tx and Rx path
- Integrated Line Driver


www.infineon.com/products

Wireline Communications



Never stop thinking.


Amazon PSB 50510 Block Diagram

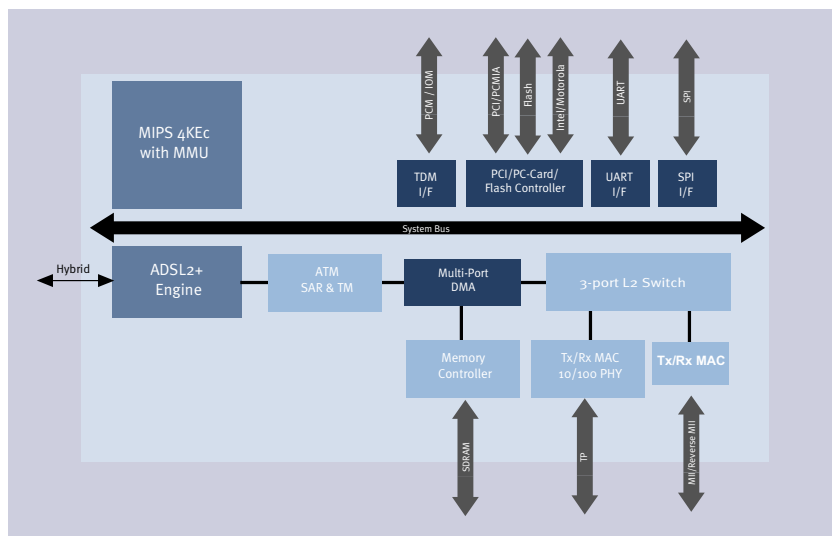

Ordering Information

IC

Product Sales Code	Description	Package
PSB50510	The Amazon is a highly integrated, single-chip solution for ADSL2 and ADSL2+ modems, routers and home gateways.	LBGA-256

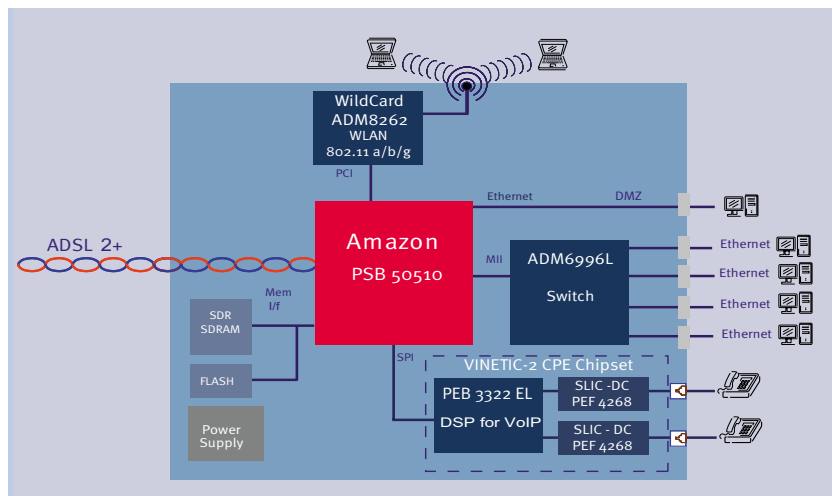

ADSL2/2+ SOHO Gateway with WLAN and VoIP Application Example

How to reach us:

<http://www.infineon.com>

Published by
Infineon Technologies AG,
St.-Martin-Strasse 53,
81669 München

© Infineon Technologies AG 2004.
All Rights Reserved.

Template: pb_tmplt_wide.fm/4
yb_rev1

Attention please!

The information herein is given to describe certain components and shall not be considered as a guarantee of characteristics.

Terms of delivery and rights to technical change reserved.

We hereby disclaim any and all warranties, including but not limited to warranties of non-infringement, regarding circuits, descriptions and charts stated herein.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office.

Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.