
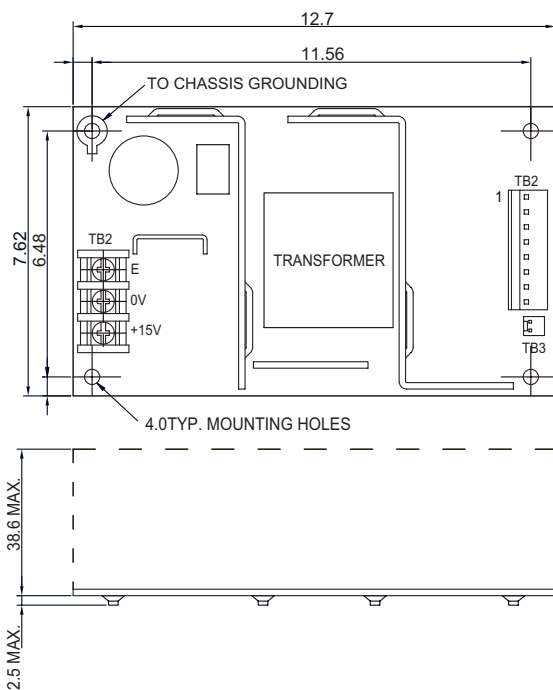


Power Supply

MPE-8071

70W AC-DC Open Frame Power Supply
Input Range: 85~270VAC

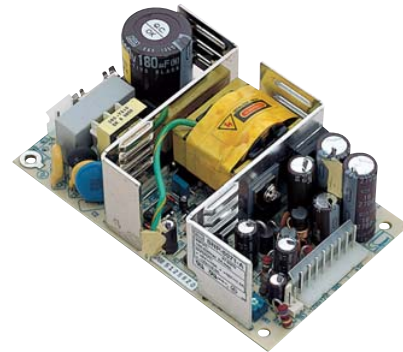

Pin	Output	Output	Min. Load	Rated Load	Max. Load	Voltage Accuracy
1~3	+5V	+5V	0A	10A	12A	5~5.1V
4~6	GND	+12V	0A	1.5A	2.5A	11.2~11.6V
7	+12V	-12V	0A	0.3A	0.3A	-10.8~-12V
8	-12V					

★ Specifications

- * **Input Voltage:** 85~270VAC
- * **Input Current:** 2A at 115VAC or 1A at 230VAC max.
- * **Inrush Current:** Does not exceed 30A at 115VAC input or 60A at 230VAC input, at cold start 25°C, and excluding EMI suppression capacitors
- * **Load Range:** All outputs are at min. load conditions, while +5V output is between 5~5.1V and all other outputs are within the specified voltage accuracy range
- * **Ripple and Noise:** Peak to peak ripple and noise for all outputs is < 1% of output voltage at rated load
- * **Line Regulation:** < +/-2% for each output measured at rated load and +/-10% input voltage range
- * **Load Regulation:** < +/-3% for +5V, +/-4% for +12V, and +/-5% for -12V with +/-40% change on the measured output load, +/-40% from 60% rated load, while keeping other outputs at 60% rated load
- * **Hold Up Time:** > 16ms at 115VAC input and rated load, measured from the end of the last charging pulse to when the main output drops down to 95% output voltage
- * **Efficiency:** > 70% at nominal line and rated load
- * **Altitude:** 10,000 feet
- * **Protection:** Latch-off mode against short circuit or over load conditions AC input ON/OFF cycle to restart power supply
- * **Temperature:** 0~50°C (operating); -40~+85°C (storage)
- * **Connectors:**
AC Input: Molex 5277-02A or equivalent device
DC Output: Molex 5273-08A or equivalent device
For Fan Use Only: Molex 5045-02A or equivalent device
- * **Dimensions:** 12.7 x 7.62 x 3.86 cm at tolerance +/-0.4mm

Safety Standards

- * **Safety:** UL 1950, CSA 22.2 No.234, VDE EN 60 950
- * **EMI:** FCC Class B, EN55022B

The Industrial PC Authority



BOSER Technology Co., Ltd.

15F-6, No. 77, Hsin Tai Wu Road, Sec. 1, Hsichih, Taipei Hsien 221 Taiwan TEL : 886-2-26983333 FAX : 886-2-26983300
<http://www.boser.com.tw> <http://www.isb.com.tw> <http://www.ipc.com.tw> E-Mail: webmaster@boser.com.tw

U.S.A. TEL : +1 650 4280868 FAX : +1 650 4281172	U.K. TEL : +44 1543 466552 FAX : +44 1543 466553	KOREA TEL : +82 2 34737862 FAX : +82 2 34743120	FRANCE TEL : +33 1 69061790 FAX : +33 1 69433732	SHANGHAI TEL : 021 63676295~7 FAX : 021 63676286
GERMANY TEL : +49 221 954790 FAX : +49 221 9547988	ITALY TEL : +39 051 452042 FAX : +39 051 455046	ISRAEL TEL : +972 3 9203456 FAX : +972 3 9203535	FINLAND TEL : +358 2 6203753 FAX : +358 2 6203770	