

## Features

- Ideal for 802.11b/g
- +23 dBm P1dB typical at 3.3 V
- 31 dB Gain typical
- 802.11b compliant to 20 dBm P<sub>OUT</sub>
- 802.11g compliant to 16 dBm P<sub>OUT</sub>
- Micro-Amp Shutdown
- Integrated Detector
- SiGe Process: Lowest Cost Solution
- Operates from 1.5 V to 4.0 V
- Lead-Free 3 mm 12-Lead PQFN Package
- 100% Matte Tin Plating over Copper
- Halogen-Free "Green" Mold Compound
- RoHS\* Compliant 260°C Reflow Compatible

## Description

The MAAP-008015 is a three stage power amplifier, designed for 2.4 GHz linear applications. This power amplifier is available in a lead free 3 mm 12-lead PQFN plastic package. The MAAP-008015 also features an integrated power detector.

## Ordering Information<sup>1</sup>

Part Number	Package
MAAP-008015-TR3000	3000 piece reel
MAAP-008015-001SMB	Sample Test Board (Includes 5 Samples)

1. Reference Application Note M513 for reel size information.

## Handling Procedures


Please observe the following precautions to avoid damage:

## Static Sensitivity

Gallium Arsenide Integrated Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices.

\* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

## Functional Schematic

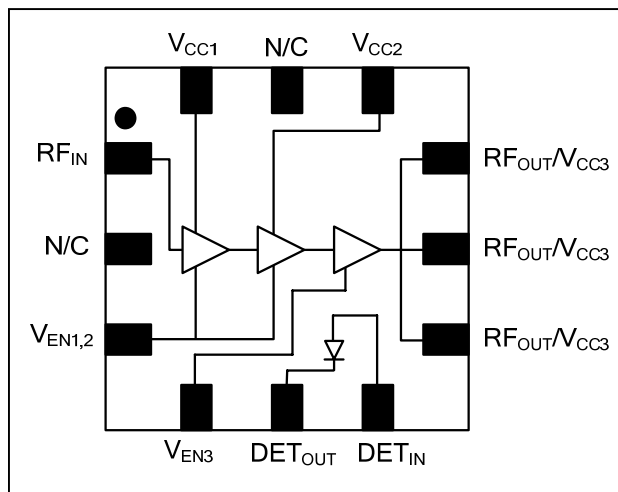

## Pin Configuration

Pin No.	Pin Name	Description
1	RF <sub>IN</sub>	RF Input
2	N/C	No Connect
3	V <sub>EN1,2</sub>	Power Enable
4	V <sub>EN3</sub>	Power Enable
5	DET <sub>OUT</sub>	Detector Output
6	DET <sub>IN</sub>	Detector Input
7	RF <sub>OUT</sub> / V <sub>CC3</sub>	RF Output, 3rd Stage Supply
8	RF <sub>OUT</sub> / V <sub>CC3</sub>	RF Output, 3rd Stage Supply
9	RF <sub>OUT</sub> / V <sub>CC3</sub>	RF Output, 3rd Stage Supply
10	V <sub>CC2</sub>	2nd Stage Supply
11	N/C	No Connect
12	V <sub>CC1</sub>	1st Stage Supply
Pad	Paddle <sup>2</sup>	RF & DC Ground

2. The exposed pad centered on the package bottom must be connected to RF and DC ground.

Linear Power Amplifier  
2.4 - 2.5 GHz, 802.11b/g

MAAP-008015  
V1

**Electrical Specifications: F = 2.45 GHz, V<sub>CC</sub> = 3.3 V, V<sub>EN</sub> = 2.5 V, T<sub>A</sub> = 25°C, Z<sub>0</sub> = 50 Ω**

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Gain		dB	29	31	33
Input Return Loss		dB	—	9	—
Forward Isolation		dB	—	50	—
P1dB		dBm	—	23	—
Supply Voltage	V <sub>CC1</sub> , V <sub>CC2</sub> , V <sub>CC3</sub>	V	—	3.3	—
Bias Voltage	V <sub>EN</sub>	V	—	2.5	—
Current	Idle	mA	30	43	55
	P <sub>OUT</sub> = 16 dBm, Modulated <sup>3</sup>	mA	—	65	—
	P <sub>OUT</sub> = 16 dBm, C.W.	mA	60	85	100
Off Current	V <sub>EN</sub> = 0 V	μA	—	3	20
Control Current	V <sub>EN</sub> Current	mA	—	3	5
Harmonics	2fo @ -15 dBm Input Power	dBc	—	-26	—
	3fo @ -15 dBm Input Power	dBc	—	-75	—
Duty Cycle		%	—	100	—
Linear Output Power	DSS source; compliance with 802.11b EVM=2.5%, OFDM, QAM-64, 54 Mbps	dBm	—	20	—
		dBm	—	16	—
Detector Output	P <sub>OUT</sub> = 16 dBm, C.W.	V	1.35	1.5	1.75
Detector Sensitivity	Up to P <sub>OUT</sub> = 16 dBm	mV/dB	—	110	—

3. EVM=2.5%, OFDM, QAM-64, 54 Mbps.


### Absolute Maximum Ratings<sup>4,5</sup>

Parameter	Absolute Maximum
Input Power	+ 5 dBm
Operating Supply Voltage	+4.0 Volts
Operating Control Voltage	+3.0 Volts
Operating Temperature	-20°C to +85°C
Channel Temperature	+150°C
Storage Temperature	-40°C to +150°C


4. Exceeding any one or combination of these limits may cause permanent damage to this device.  
5. M/A-COM does not recommend sustained operation near these survivability limits.

**Typical Performance Curves:  $V_{CC} = 3.3\text{ V}$ ,  $V_{EN} = 2.5\text{ V}$ , over Temperature**


**$S_{21}$  vs. Frequency (2.3 GHz - 2.6 GHz) -Gain**

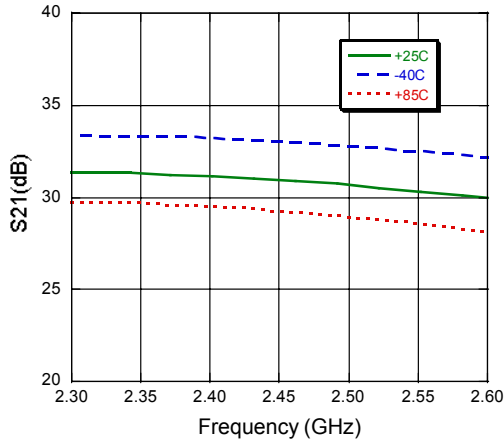


**$S_{21}$  vs. Frequency -Gain**

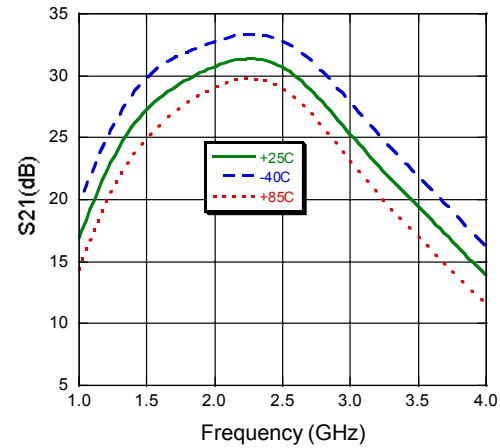


**$S_{11}$  vs. Frequency (2.3 GHz - 2.6 GHz)**

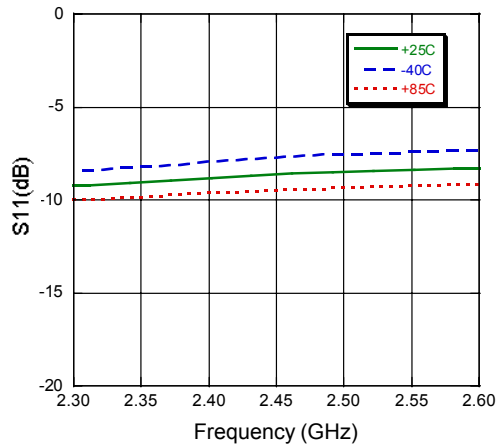


**$S_{11}$  vs. Frequency**

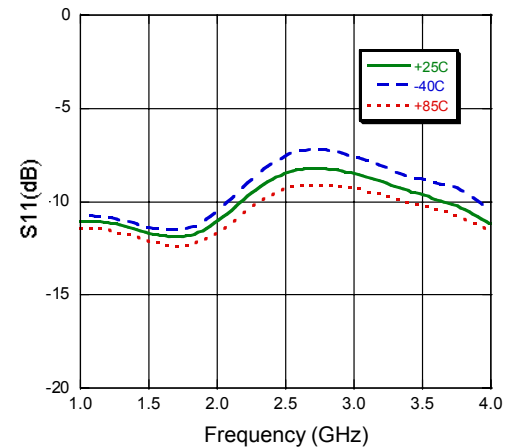

**$S_{22}$  vs. Frequency (2.3 GHz - 2.6 GHz)**

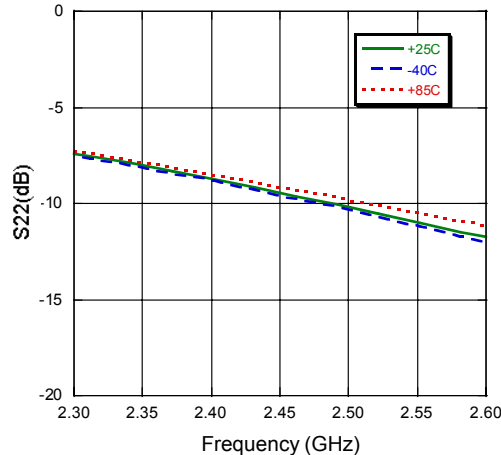


**$S_{22}$  vs. Frequency**

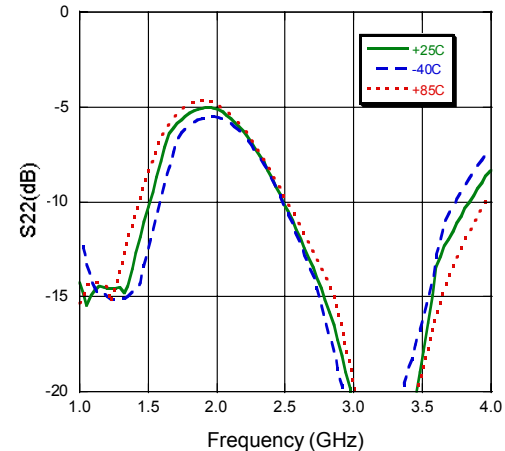


**Typical Performance Curves:  $V_{CC} = 3.3\text{ V}$ ,  $V_{EN} = 2.5\text{ V}$**


***P*<sub>1dB</sub> at 2.45 GHz**

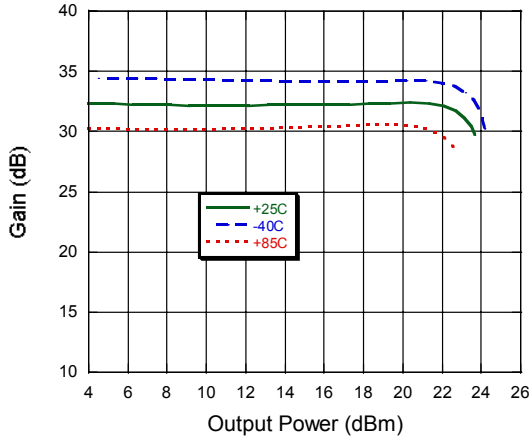


***EVM* vs. *P*<sub>OUT</sub>, OFDM, QAM-64, 54 Mbps**

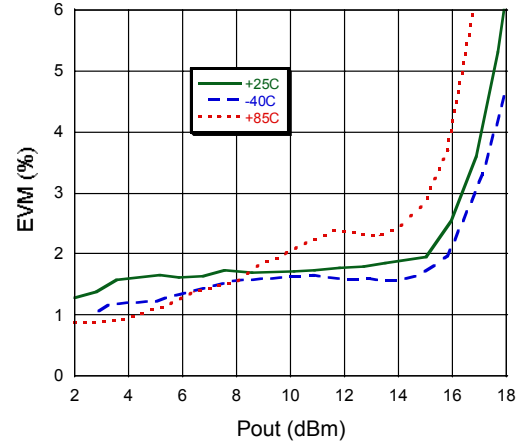


***C.W.* Current vs. *P*<sub>OUT</sub> over Temperature at 2.45 GHz**

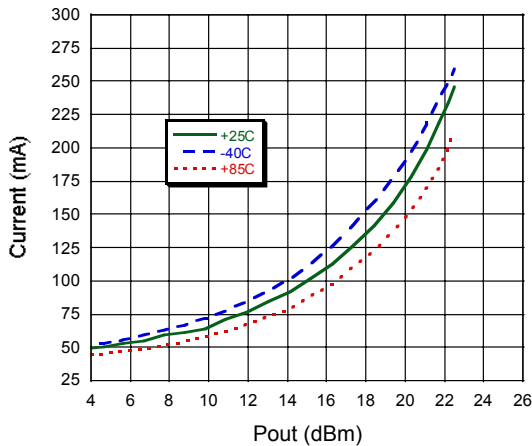

***V*<sub>DET</sub> vs. *P*<sub>OUT</sub> over Temperature at 2.45 GHz**

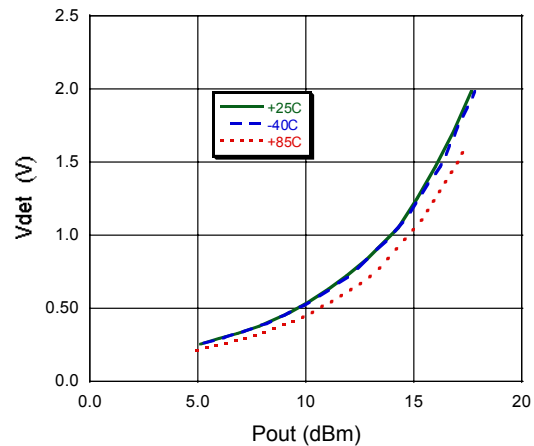


**Harmonics**

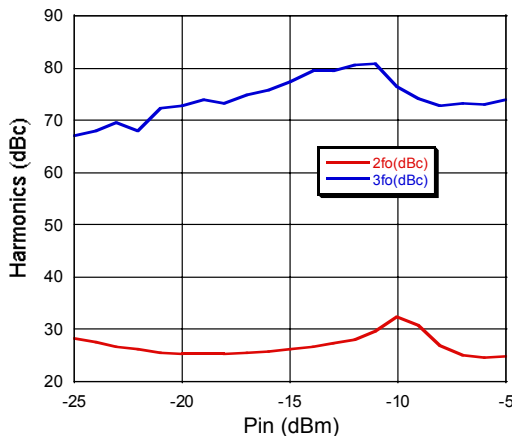

Linear Power Amplifier  
2.4 - 2.5 GHz, 802.11b/g


MAAP-008015  
V1

**Lead-Free 3 mm 12-Lead PQFN†**

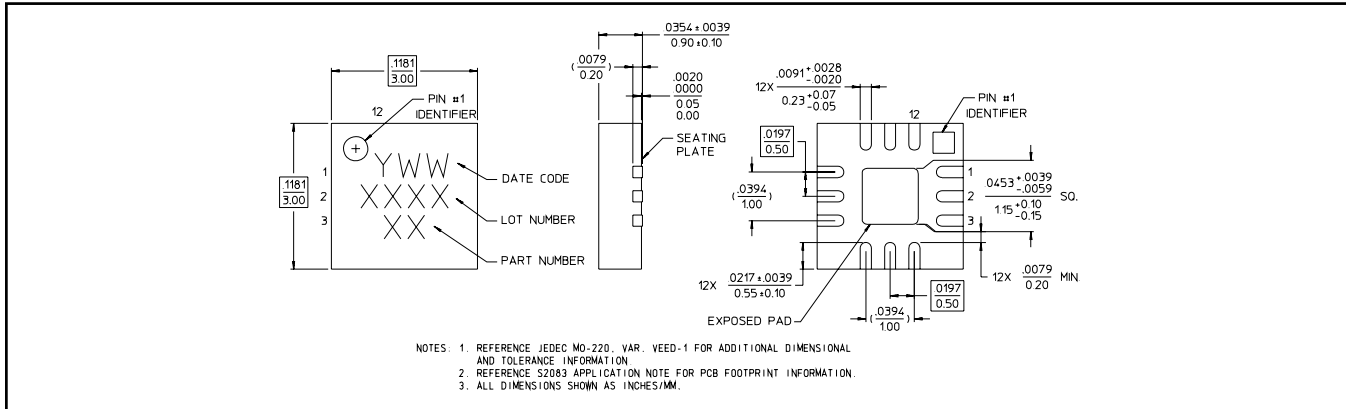


† Reference Application Note M538 for lead-free solder reflow recommendations.  
Meets JEDEC moisture sensitivity level 1 requirements.

**Evaluation Board Schematic**

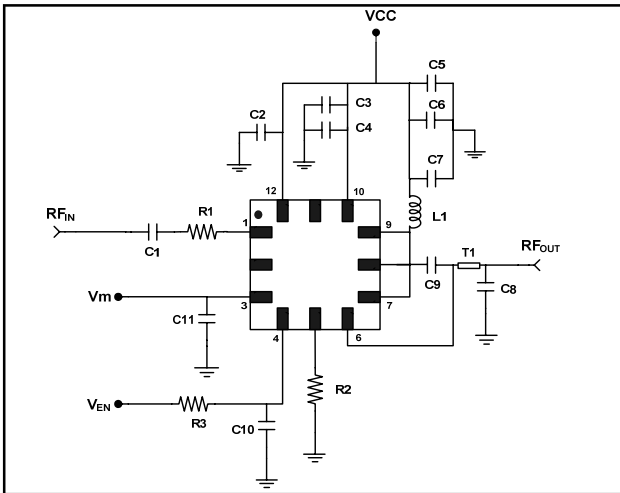

**Recommended PCB Configuration**

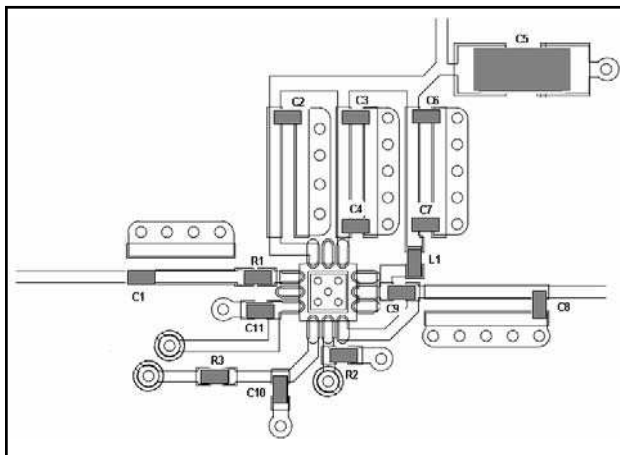

**External Parts List <sup>6</sup>**

Component	Value	Footprint	Manufacturer
C1	1000 μF	0402	Murata
C2, C3, C6, C10, C11	0.1 μF	0402	Murata
C4, C7, C9	47 pF	0402	Murata
C5	10 μF	1206	AVX
C8	1.0 pF	0402	Murata
L1	10 nH	0402	Coilcraft
R1	10 Ω	0402	Panasonic
R2	1000 Ω	0402	Panasonic
R3	619 Ω	0402	Panasonic
T1	48.8 Ω, 29.04° @ 2400 MHz		

6. Equivalent components can be substituted.

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.


- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit [www.macom.com](http://www.macom.com) for additional data sheets and product information.


**Applications Section**

**Typical Performance Curves, 900 MHz Configuration**

**P1dB**

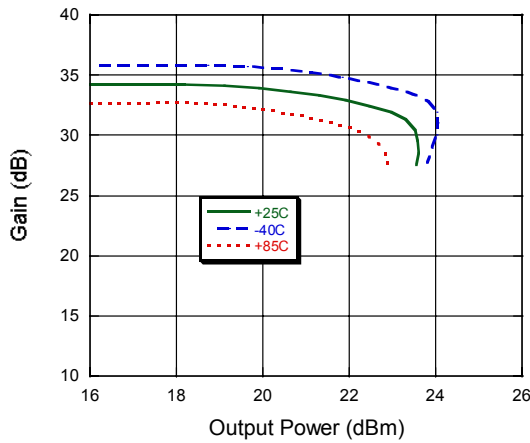

**PAE**

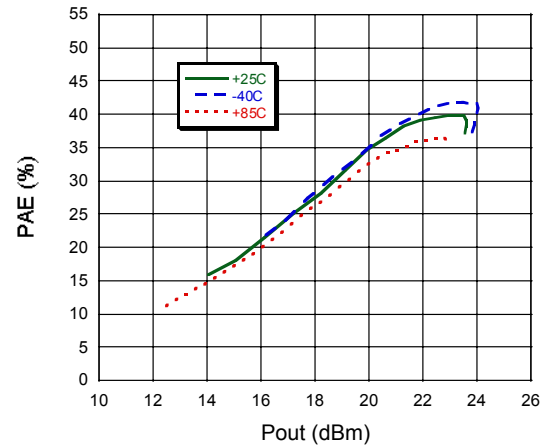

**Current**

