

1. PART NO. EXPRESSION :

SMC1409R56YZF
 (a) (b) (c) (d)(e)(f)

(a) Series code

(b) Dimension code


(c) Inductance code : R56 = 0.56uH

(d) Tolerance code : M = ±20%, Y = ±30%

(e) X, Y, Z : Standard part

(f) F : Lead Free


2. CONFIGURATION & DIMENSIONS :

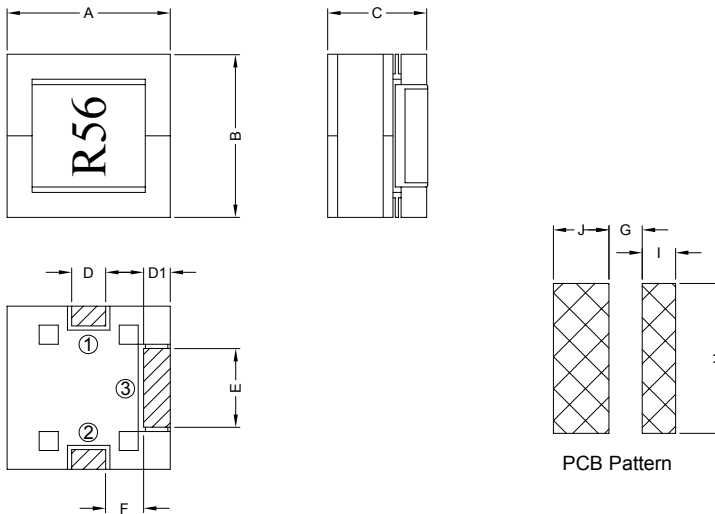


Unit:m/m

A	B	C	D	D1	E	F	G	H	I	J
14.70±0.30	15.00±0.30	9.50±0.30	4.00±0.30	2.00±0.30	8.00±0.30	4.00±1.00	3.00 Ref.	13.50 Ref.	3.00 Ref.	5.00 Ref.

3. SCHEMATIC :



4. MATERIALS :

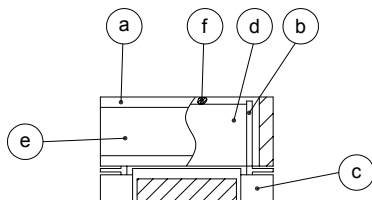

(a) Core : EPC Ferrite Core

(b) Bobbin : Phenolic

(c) Base : Phenolic

(d) Wire : Copper Foil

(e) Tape : Mylar Tape

(f) Adhesive : Epoxy

(g) Varnish : 8562/C



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

09.06.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

PG. 1

5. GENERAL SPECIFICATION :


- a) Temp. rise : 40°C Max. at rated current
- b) Rated Current : Base on temp. rise & $\Delta L/L0A = 25\%$ Max.
- c) Storage temp. : -40°C to +125°C
- d) Operating temp. : -40°C to +85°C
- e) Resistance to solder heat : 260°C.10 secs

6. ELECTRICAL CHARACTERISTICS :

Part No.	Inductance (μ H)	Test Frequency (Hz)	RDC (m Ω) Max.	IDC (A)
SMC1409R56YZF	0.56 \pm 30%	1V/100K	1.00	30
SMC14091R0MZF	1.00 \pm 20%	1V/100K	1.35	22
SMC14091R6MZF	1.60 \pm 20%	1V/100K	1.70	18
SMC14092R2MZF	2.20 \pm 20%	1V/100K	2.35	15

7. CHARACTERISTICS CURVES :

@ INDUCTANCE VS. DC SUPERPOSITION CHARACTERISTICS

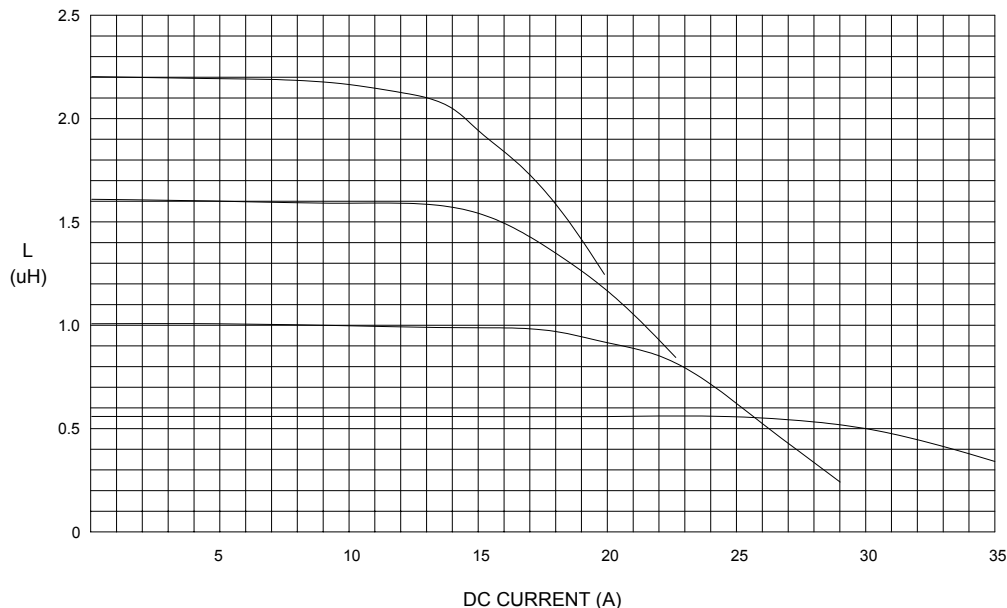

RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

09.06.2008




SUPERWORLD ELECTRONICS (S) PTE LTD


PG. 2

7. CHARACTERISTICS CURVES :

@ TEMP. RISE VS. DC SUPERPOSITION RESPONSE CURVE

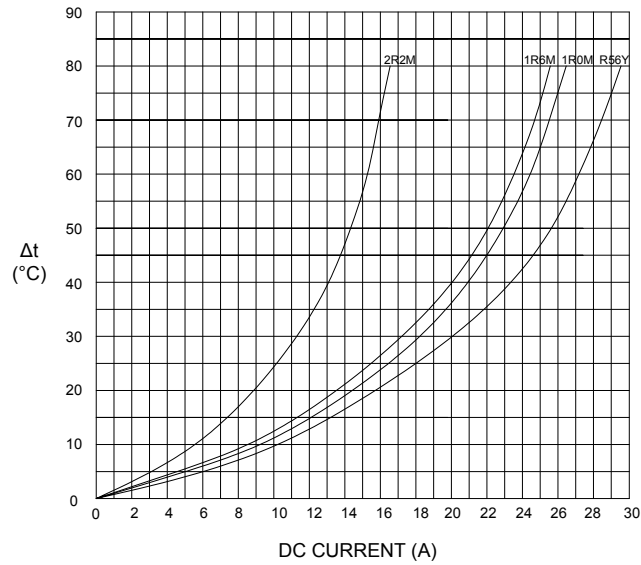

@ INDUCTANCE VS. DC SUPERPOSITION RESPONSE CURVE

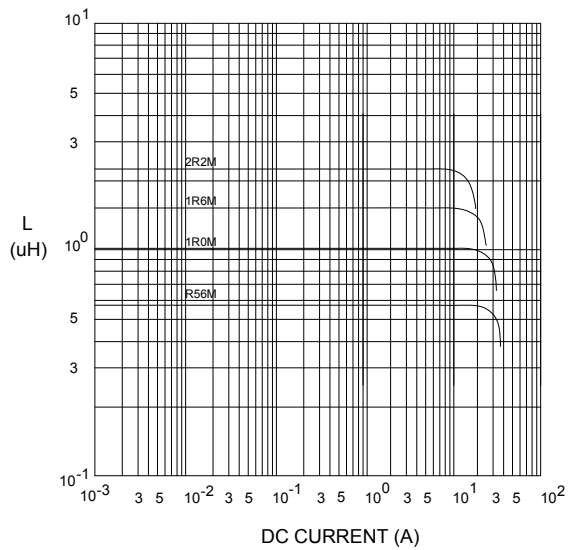

NOTE : Specifications subject to change without notice. Please check our website for latest information.



RoHS Compliant


09.06.2008



SUPERWORLD ELECTRONICS (S) PTE LTD


PG. 3

RECOMMENDED SOLDERING CONDITIONS REFLOW SOLDERINGS

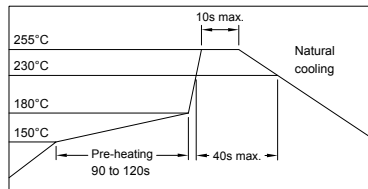


8. PACKAGING INFORMATION :

(1) CONFIGURATION

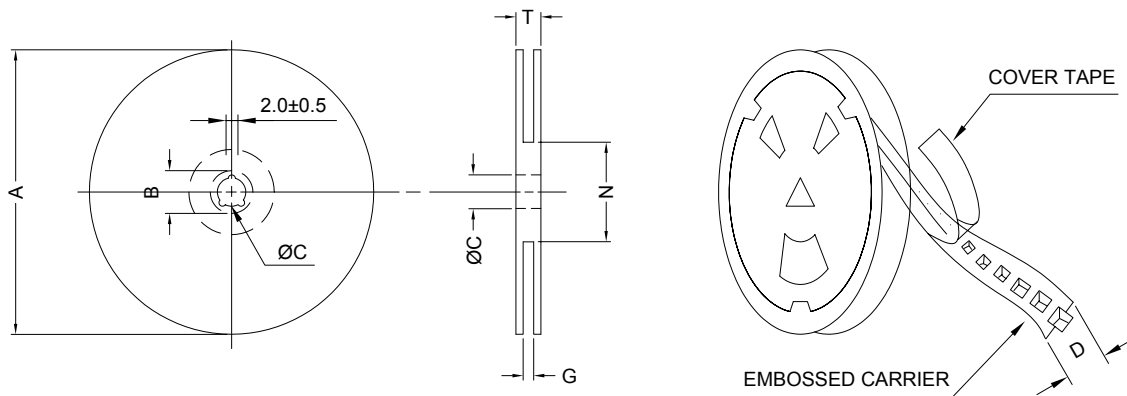

* CARRIER TAPE WIDTH : D

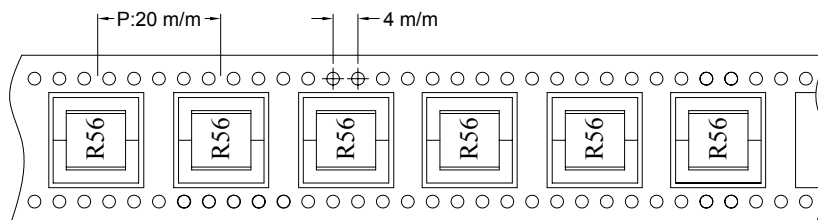

(2) DIMENSIONS

Unit:m/m

STYLE	A	B	C	D	G	N	T
13-32	330	21±0.8	13±0.5	32	34 ⁺⁰	100 ⁻⁰	38.4

(3) Q'TY & G.W. PER PACKAGE

SERIES	INNER : REEL			OUTER : CARTON		
	Q'TY (PCS)	G.W. (gw)	STYLE	Q'TY (PCS)	G.W. (Kg)	SIZE (cm)
SMC1409	350	1750	13-32	1400	10.5	40 x 40 x 26



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

09.06.2008

9. RELIABILITY AND TEST CONDITION :

TEST ITEM	SPECIFICATION	TEST CONDITION
SOLDERABILITY	MORE THAN 90% OF THE TERMINAL ELECTRODE SHALL BE COVERED WITH FRESH SOLDER.	PREHEAT : 125±25°C FOR 60 SECONDS SOLDER : 99%Sn/0.3%Ag/0.7%Cu OR EQUIVALENT SOLDER TEMP. : 245±5°C FLUX : ROSIN DIP TIME : 4±1 SECONDS
THERMAL SHOCK TEST (TEMP. CYCLE)	INDUCTANCE SHALL NOT CHANGE MORE THAN ±20%	ROOM TEMP. → -25±2°C 15 MINUTES 30 MINUTES ROOM TEMP. → 85±2°C 15 MINUTES 30 MINUTES TOTAL : 50 CYCLES
HUMIDITY RESISTANCE TEST		TEMPERATURE : 40±2°C HUMIDITY : 90 ~ 95% APPLIED CURRENT : PER SPEC. TIME : 500 HOURS
HIGH TEMP. RESISTANCE TEST		TEMPERATURE : 85±2°C APPLIED CURRENT : PER SPEC. TIME : 500 HOURS



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

09.06.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

PG. 5

10. UL CARD :

OANZ2 March 15, 1999
Insulating Tape-Component

FOUR PILLARS ENTERPRISE CO LTD E50292
 443 TAO YING RD, TAOYUAN 33009 TAIWAN

Flame retardant polyvinyl chloride tape, Cat. No. 33047+.
 Polyethylene-Terephthalate film insulating tape with acrylic adhesive, Cat. No. 35660*^a@.355660y*^b. rated 130C.
 Flame retardant double sided acrylic tape, Cat. No. DS31+.
 Aramie "Nomex" paper tape, Cat. No. NM130* rated 155C.
 Glass cloth backing with silicone adhesive, Cat. No. GL06* rated 180C.
 Glass cloth backing with acrylic adhesive, Cat. No. GL15* rated 155C.
 Glass cloth backing with rubber adhesive, Cat. No. GL27* rated 130C.
 Polyethylene - Terephthalate film insulating tape with acrylic adhesive. Cat. No. MY130# Rated 130 C.
 Polyesterfilm insulating tape with silicone base adhesive, Cat. No. KA180* rated 180C.
 Polyimide film insulating tape with silicone base adhesive, Cat. No. KA180* rated 200 C.
 Acetate cloth backing with rubber base adhesive, Cat. No. ACO* rated 130 C.
 Polyethylene-Terephthalate film insulating tape with acrylic adhesive, Cat. No.35661\$ Rated 130 C.
 Aluminum/polyester tape, Cat No. PAN1* rated 80 C.

6/17/1999 Underwriters Laboratories Inc. Card 1 of 3

QMFZ2 January 15, 1991
Component-Plastics

SUMITOMO BAKELITE CO LTD E41429 (M)
(11-cont. from I card)

PM-9630	BK	0.40	94V-0	150	150	150	—	—	—	—	—
		0.51	94V-0	150	150	150	0	0	—	—	—
		3.18	94V-0	150	150	150	0	1	0	4	3
PM-8315	BK	0.50	94V-0	150	150	150	3	0	0	—	—
		0.71	94V-0	150	150	150	2	0	0	—	—
PM-8315J	BN	1.47	94V-0	150	150	150	0	2	0	—	—
		3.05	94V-0	150	150	150	0	1	0	5	4
		6.10	94V-0	150	150	150	0	1	0	5	4
PM-8315K	BK	0.78	94V-1	150	150	150	—	—	—	—	—
		1.52	94V-0	150	150	150	—	—	—	—	—
PM-8320J	BK	0.71	94HB	150	150	150	—	—	—	—	—
PM-8330	BK	0.71	94V-1	150	150	150	—	—	—	—	—
		1.57	94V-0	150	150	150	—	—	—	—	—
PM-8400	BK	0.71	94HB	150	150	150	—	—	—	—	—
PM-9830	BK	0.69	94V-0	150	150	150	0	0	—	—	—
		3.18	94V-0	150	150	150	0	0	0	4	3

Reports: March 29, 1985; May 14, 1974; September 16, 1971; September 16, 1971; September 16, 1971; September 16, 1971; March 29, 1985.

Replaces E4142911 dated February 28, 1990. (Cont. on J card)
 683540014 N7047 Underwriters Laboratories Inc. ® D11/0043416



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

09.06.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

PG. 6