

MT1622 Series

Specifications:


Parameters	Units	MT1622A01NP	MT1622A06NP	MT1622A12NP
▶ Min Sound Pressure Level at 10cm	dBa	80	85	85
Rated Voltage	V _{o-p}	1.5	6	12
Operating Voltage	V _{o-p}	1 - 3	4 - 8	9 - 15
Resonance Frequency	Hz	2048	2048	2048
▶ Max Operating Current	mA	18	40	40
Coil Resistance	Ω	27 ± 3	50 ± 5	115 ± 12
Operating Temperature	°C	-20 - +70	-20 - +70	-20 - +70
Case Material	-	Noryl	Noryl	Noryl
Weight	g	5.0	5.0	5.0



* Washable

Unit: mm • Tolerance: ±0.5mm


▶ Value applying rated voltage (1/2 duty square wave, resonance frequency)

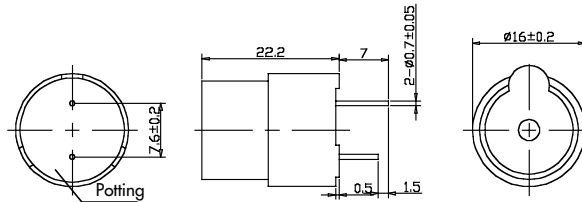

MT2513 Series

Specifications:

Parameters	Units	MT2513A06NP	MT2513A12NP
▶ Min Sound Pressure Level at 10cm	dBa	85	85
Rated Voltage	V _{o-p}	6	12
Operating Voltage	V _{o-p}	3 - 8	8 - 14
Resonance Frequency	Hz	1000	1000
Reproduced Frequency	Hz	1000-1500(min 80dBa)	1000-1500(min 80dBa)
▶ Max Operating Current	mA	70	55
Coil Resistance	Ω	36 ± 5	120 ± 15
Operating Temperature	°C	-40 - +85	-40 - +85
Case Material	-	Noryl	Noryl
Weight	g	10.0	10.0



* Washable

Unit: mm • Tolerance: ±0.5mm
Wave solder and wash not allowed

▶ Value applying rated voltage (1/2 duty square wave, resonance frequency)

