



Features


- 50 x 50 mm LED array for backlight illumination
- Continuous light and strobed models available
- Choose white, red, blue, or infrared LED models
- Black anodized aluminum housing

LED Backlight Models

Models	Illumination Type	Color	Cable	Supply Voltage	Supply Current	Connections
LEDWB50X50N [†]	Continuous diffused light	White 6500 K	1.8 m (6') terminated with 9-pin D-sub connector (male pins)	12V dc $\pm 10\%$ with voltage regulation of $\pm 1\%$	440 mA max.	12V dc models: Pin 4 = +V Pin 3 = dc common
LEDBB50X50N [†]		Blue 470 nm			355 mA max.	
LEDRB50X50N		Red 640 nm				
LEDIB50X50N [†]		Infrared 940 nm				
LEDWB50X50N-24 [†]		White 6500 K		24V dc $\pm 10\%$ with voltage regulation of $\pm 1\%$	440 mA max.	24V dc models: Pin 6 = +V Pin 8 = dc common Power supplies listed on other side of this data sheet are recommended
LEDBB50X50N-24 [†]		Blue 470 nm			355 mA max.	
LEDRB50X50N-24 [†]		Red 640 nm				
LEDIB50X50N-24 [†]		Infrared 940 nm				
LEDWB50X50N-S [†]	Strobed diffused light	White 6500 K		24V dc $\pm 10\%$ with voltage regulation of $\pm 1\%$	4.4 A max. 1 ms pulse	Pin 4 = +V Pin 1 = dc common
LEDBB50X50N-S [†]		Blue 470 nm			3.2 A max. 1 ms pulse	
LEDRB50X50N-S [†]		Red 640 nm				
LEDIB50X50N-S [†]		Infrared 940 nm			Use strobe control module model SCM (see other side)	

[†] These models are not stocked and are non-returnable.

Useful Life	White, blue, and infrared models: 50,000 hours; Red models: 60,000 hours. Note: actual useful life of strobed lights depends on duty cycle
Environmental Rating	IEC IP20; NEMA 1
Operating Conditions	Temperature: 0° to 40°C (+32° to 104°F) Maximum relative humidity: 95% at 40°C (non-condensing)

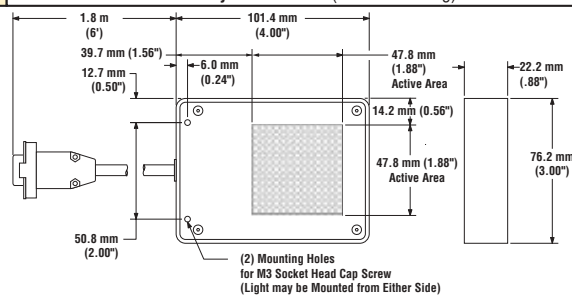

WARRANTY: Banner Engineering Corp. warrants its products to be free from defects for one year. Banner Engineering Corp. will repair or replace, free of charge, any product of its manufacture found to be defective at the time it is returned to the factory during the warranty period. This warranty does not cover damage or liability for the improper application of Banner products. This warranty is in lieu of any other warranty either expressed or implied.

LED Backlights (50 x 50 mm)

Accessories

Continuous Power Supplies

Models	Input	Input Cord	Output	Output Cable	Used with
PSA-12	100-250V ac 50/60 Hz	North America (NEMA 5-15)	12V dc $\pm 5\%$ with voltage regulation of $\pm 1\%$ 3.5 A max.	1.8 m (6') Terminated with 9-pin D-sub connector (female pins)	Continuous types: Model suffix "N"
PSA-12E		Cont. Europe (Schuko CEE 7)			
PSA-24†		North America (NEMA 5-15)	24V dc $\pm 5\%$ with voltage regulation of $\pm 1\%$ 2.2 A max.		Continuous types: Model suffix "N-24"
PSA-24E†		Cont. Europe (Schuko CEE 7)			
PSC-24†	100-250V ac 50/60 Hz	North America (NEMA 5-15)	24V dc $\pm 5\%$ with voltage regulation of $\pm 1\%$ 2.2 A max.	1.8 m (6') 2-wire Unterminated	SCM Strobe Control Module (see below)
PSC-24E†		Cont. Europe (Schuko CEE 7)			



Variable Power Supplies (see data sheet p/n 67449)

Models	Input	Input Cord	Output	Output Cable	Used with
PS2V-12†	100-140V ac 60 Hz	North America (NEMA 5-15)	2-channels 6 - 12V dc 2 A max. per channel	1.8 m (6') Terminated with 9-pin D-sub connector (female pins)	Continuous types: LEDWB50X50N LEDBB50X50N LEDRB50X50N LEDIB50X50N
PS2V-12E†	200-250V ac 50 Hz	Cont. Europe (Schuko CEE 7)			



Strobe Control Module (see data sheet p/n 67448)

Models	Input	Trigger Input	Output	Output Pulse Range	Used with
SCM†	24V dc $\pm 5\%$ 2 A max.	5 - 12V dc pulse rising or falling (switch selectable) 10 mA max.	2-channels 24V dc $\pm 5\%$ 9 A nominal per channel @ 60 Hz	5 to 1,300 microseconds	Strobed types: LEDWB50X50N-S LEDBB50X50N-S LEDRB50X50N-S LEDIB50X50N-S
(Use Power Supply PSC-24 or PSC-24E)					



Extension Cables

Models	Length	Configuration	Used with
DB906†	1.8 m (6')	Terminated both ends with 9-pin D-sub connector, for continuous lights (one end male pins and opposite end female pins)	Continuous types: Model suffix "N" and "N-24"
DB910†	3.0 m (10')		
DB9Y†	1.8 m (6')	Y cable for powering 2 lights from one supply, for continuous lights	Strobed types: Model suffix "N-S"
DB906S†	1.8 m (6')	Terminated both ends with 9-pin D-sub connector, for strobed lights (one end male pins and opposite end female pins)	
DB910S†	3.0 m (10')		
DB9YS†	1.8 m (6')	Y cable for powering 2 lights from one supply, for strobed lights	

† These models are not stocked and are non-returnable.

Banner Engineering Corp., 9714 Tenth Ave. No., Mpls., MN 55441 • Ph: 763.544.3164 • www.bannerengineering.com • Email: sensors@bannerengineering.com