


MS2575

**RF & MICROWAVE TRANSISTORS
AVIONICS APPLICATIONS**


Features

- 1025-1150 MHz
- GOLD METALLIZATION
- INPUT MATCHED
- INFINITE VSWR CAPABILITY @ RATED CONDITIONS
- P_{OUT} = 35 W MINIMUM
- G_P = 10.7 dB

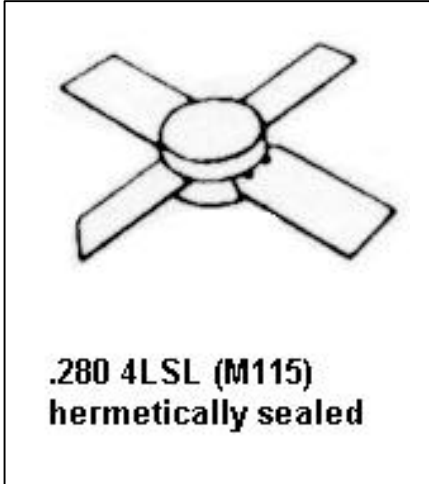

DESCRIPTION:

The MS2575 is a medium power Class C transistor designed specifically for pulsed L-Band avionics applications. Low RF thermal resistance and computerized automatic wire bonding techniques ensure high reliability and product consistency. The MS2575 is housed in the IMPAC™ package with internal input matching.

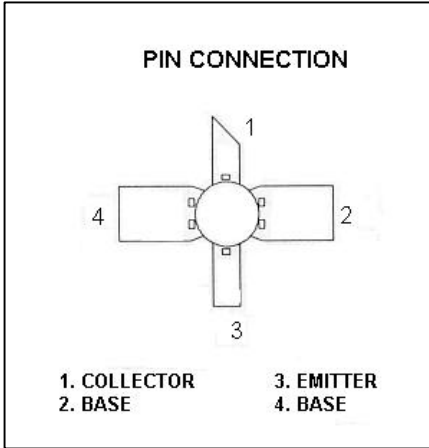

ABSOLUTE MAXIMUM RATINGS (T_{case} = 25°C)

Symbol	Parameter	Value	Unit
P _{DISS}	Power Dissipation	150	W
V _{CE}	Collector-Emitter Bias Voltage	55	V
T _J	Junction Temperature	200	°C
I _C	Device Current	3	A
T _{STG}	Storage Temperature	-65 to +200	°C

THERMAL DATA

R _{TH(J-C)}	Junction-case Thermal Resistance	1.0	°C/W
----------------------	----------------------------------	-----	------

ELECTRICAL SPECIFICATIONS (T_{case} = 25°C)
STATIC

Symbol	Test Conditions		Value			Unit
			Min.	Typ.	Max.	
BV_{CBO}	I_C = 10 mA	I_E = 0 mA	65	---	---	V
BV_{CER}	I_C = 10 mA	R_{BE} = 10Ω	65	---	---	V
BV_{EBO}	I_E = 1 mA	I_C = 0 mA	3.5	---	---	V
I_{CES}	V_{CE} = 50 V		---	---	5.0	mA
HFE	V_{CE} = 5 V	I_C = 500 mA	15	---	120	---

DYNAMIC

Symbol	Test Conditions			Value			Unit
				Min.	Typ.	Max.	
P_{OUT}	f = 1025 - 1150 MHz	P_{IN} = 3W	V_{CE} = 50V	35	---	---	W
η_C	f = 1025 - 1150 MHz	P_{IN} = 3W	V_{CE} = 50V	43	---	---	%
G_p	f = 1025 - 1150 MHz	P_{IN} = 3W	V_{CE} = 50V	10.7	---	---	dB
Conditions	Pulse Width = 10 μs Duty Cycle = 1%						


IMPEDANCE DATA

FREQ	Z _{IN} (Ω)	Z _{CL} (Ω)
1025 MHz	2.6 + j8.3	7.7 + j2.0
1090 MHz	2.8 + j8.7	7.1 + j1.0
1150 MHz	3.2 + j4.4	6.5 - j0.5

P_{in} = 3W V_{ce} = 50V

PACKAGE MECHANICAL DATA

PACKAGE STYLE M115

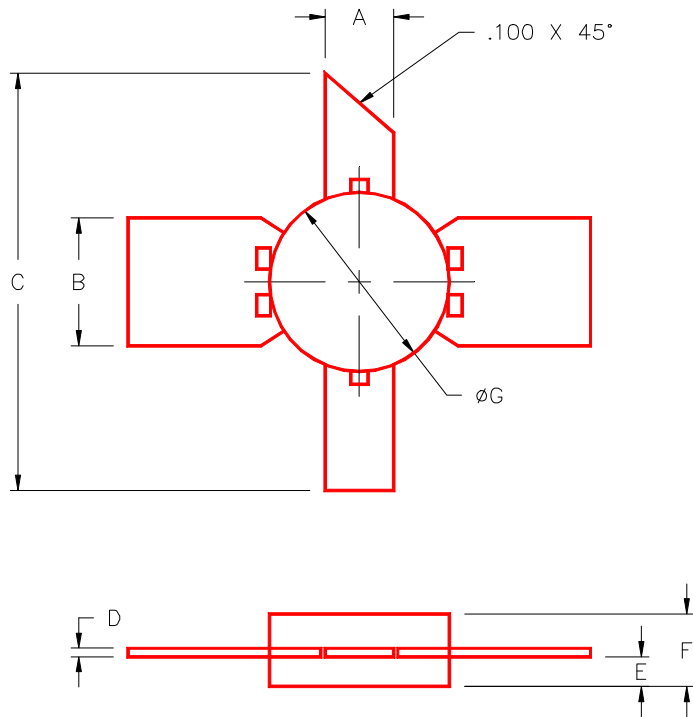

	MINIMUM INCHES/MM	MAXIMUM INCHES/MM		MINIMUM INCHES/MM	MAXIMUM INCHES/MM
A	.095/2,41	.105/2,67			
B	.195/4,95	.205/5,21			
C	1.000/25,40				
D	.004/0,10	.007/0,18			
E	.050/1,27	.065/1,65			
F	.120/3,05	.135/3,43			
G	.275/6,99	.285/7,21			