


## 240 x 128 Graphic LCD

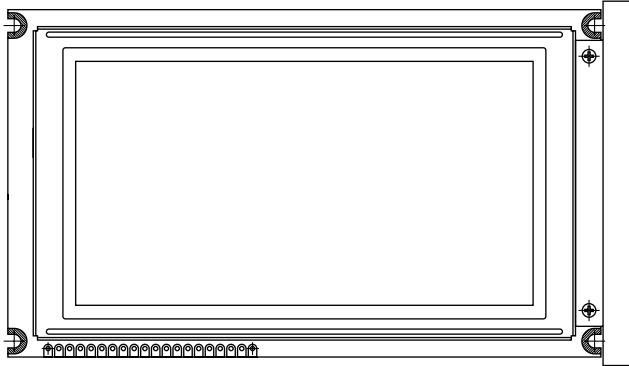

### FEATURES

- Type: Graphic
- Display format: 240 x 128 dots
- Built-in controller: RA8820 (or equivalent)
- Duty cycle: 1/128
- + 5 V power supply (2.7 V to 5.0 V selective)
- Built-in N.V.
- Chinese version
- Controller RA8822 optional (LCD-240H128S)
- Compliant to RoHS directive 2002/95/EC


**RoHS**  
COMPLIANT

### MECHANICAL DATA

ITEM	STANDARD VALUE	UNIT
Module Dimension	140.0 x 82.0	mm
Viewing Area	114.0 x 64.0	
Dot Size	0.43 x 0.43	
Dot Pitch	0.45 x 0.45	
Mounting Hole	137.0 x 74.5	
Character Size	N/a	

### ABSOLUTE MAXIMUM RATINGS

ITEM	SYMBOL	STANDARD VALUE			UNIT
		MIN.	TYP.	MAX.	
Power Supply	$V_{DD}$ to $V_{SS}$	4.75	5.0	5.25	V
Input Voltage	$V_I$	0.3	-	$V_{DD}$	

**Note**

- $V_{SS} = 0$  V,  $V_{DD} = 5.0$  V

### ELECTRICAL CHARACTERISTICS


ITEM	SYMBOL	CONDITION	STANDARD VALUE			UNIT
			MIN.	TYP.	MAX.	
Input Voltage	$V_{DD}$	L level	$0.7 V_{DD}$	-	$V_{DD}$	V
	$V_{IO}$	H level	-	-	$0.3 V_{DD}$	
Supply Current	$I_{DD}$	$V_{DD} = +5$ V	0	45	50	mA
Recommended LC Driving Voltage for Normal Temperature Version Module	$V_{DD}$ to $V_0$	- 20 °C	-	-	-	V
		0 °C	20.3	21.4	22.5	
		25 °C	18.0	19.2	20.2	
		50 °C	17.8	18.9	20.0	
LED Forward Voltage	$V_F$	25 °C	-	4.2	-	V
LED Forward Current	$I_F$	25 °C	-	920	1800	mA
CCFL Forward Voltage	$V_F$	25 °C	-	250	590	$V_{RMS}$
CCFL Forward Current	$I_F$	25 °C	-	-	5.5	$mA_{RMS}$
EL Power Supply Current	$I_{EL}$	$V_{EL} = 110$ V <sub>AC</sub> , 400 Hz	-	-	5.0	mA

### OPTIONS

PROCESS COLOR						BACKLIGHT			
TN	STN Gray	STN Yellow	STN Blue	FSTN B&W	STN Color	None	LED	EL	CCFL
	x	x	x	x		x	x	x	x

For detailed information, please see the "Product Numbering System" document.

INTERFACE PIN FUNCTION		
PIN NO.	SYMBOL	FUNCTION
1	V <sub>SS</sub>	Ground
2	V <sub>DD</sub>	Power supply for logic
3	V <sub>0</sub>	Operating voltage LCD driving
4	C/D	Command/data read/write
5	R <sub>D</sub>	8080 family: Read signal; 6800 family: Enable signal
6	W <sub>R</sub>	8080 family: Write signal; 6800 family: R/W signal
7	DB0	Data bus line
8	DB1	Data bus line
9	DB2	Data bus line
10	DB3	Data bus line
11	DB4	Data bus line
12	DB5	Data bus line
13	DB6	Data bus line
14	DB7	Data bus line
15	C <sub>S</sub>	Chip select
16	RES	Reset
17	V <sub>EE</sub>	Negative voltage output
18	BUSY	RA8820 busy
19	INT	Programmable interrupt for 8802
20	A	Power supply for B/L

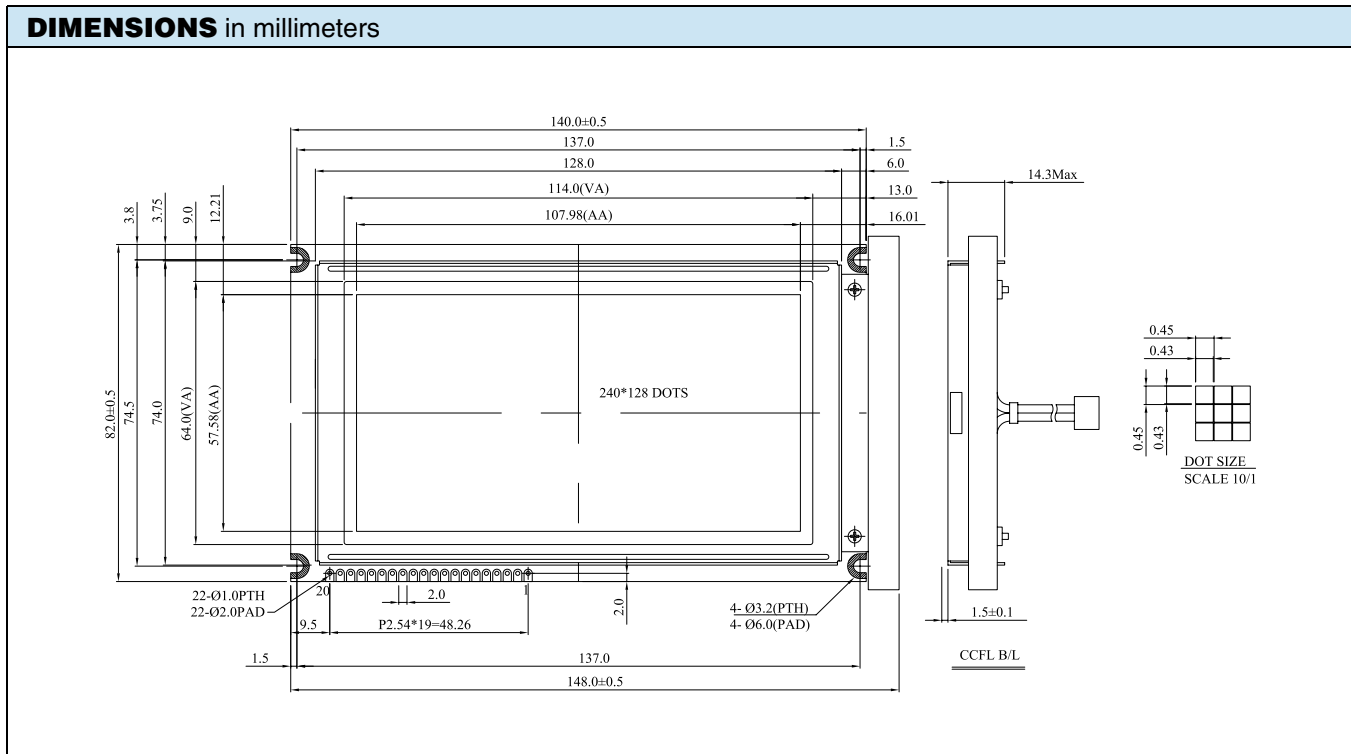



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.