

MPM-04 Series

Compact, Board Mount 4W Single And Dual Output AC/DC Power Supplies



Key Features:

- 4W Output Power
- Miniature Size
- Universal 90-264 VAC Input
- EN 60950 Approved
- Meets IEC Safety Class II
- Single and Dual Outputs
- Meets EN55022 B
- >350 kHour MTBF



MicroPower Direct

292 Page Street
Suite D
Stoughton, MA 02072
USA

T: (781) 344-8226
F: (781) 344-8481
E: sales@micropowerdirect.com
W: www.micropowerdirect.com



Electrical Specifications

Specifications typical @ +25°C, 230 VAC input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

Input						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Input Voltage Range		90		264	VAC	
		120		370	VDC	
Input Frequency		47		440	Hz	
Input Current	See Model Selection Guide					
Inrush Current	115 VAC		15.0		A Pk	
	230 VAC		25.0			
EMI	Meets CISPR Pub. 22/FCC Class B					
EMC	Meets EN55024					
Output						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Output Voltage	See Model Selection Guide					
Output Current	See Model Selection Guide					
Output Voltage Accuracy, Note 2			±2.0		%	
Line Regulation, Note 3	V _{IN} = Min to Max		±0.2		%	
Load Regulation, Single Output	3.3V to 9V output, I _o = 0% to 100%		±1.0		%	
Load Regulation, Single Output	12V to 24V output, I _o = 0% to 100%		±0.5		%	
Load Regulation, Dual Output	V _{out 1} , I _o = 10% to 100%		±0.5		%	
Load Regulation, Dual Output	V _{out 2} , I _o = 10% to 100%		±5.0		%	
Ripple (20 MHz)	Note 4		100.0		mVp-P	
Noise	Note 4		150.0		mVp-P	
Hold-Up Time	115 VAC		15		mSec	
Temperature Coefficient			±0.02		%/°C	
Over Voltage Protection	Zener Diode Clamp		120		% of V _o	
Short Circuit Protection, Note 5	Continuous (Autorecovery)					
Overload Protection		105	120		% of I _o	
General						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Isolation Voltage	Input to Output	3,000			VAC	
Isolation Resistance	500 VDC	100			MΩ	
EMC Compliance	EMI/RFI	Conducted EN 55022 Level B				
		Electrostatic Discharge (ESD) IEC/EN 61000-4-2 Level B				
		RF Field Susceptibility IEC/EN61000-4-3				
		Electrical Fast Transients/Bursts On Mains IEC/EN 61000-4-4 Level 3 2 kV				
	Surge	IEC/EN 61000-4-5 Level 3 1kV/2 kV				
Switching Frequency			132		kHz	
Environmental						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Operating Temperature Range	Ambient	-40	+25	+70	°C	
Storage Temperature Range		-40		+125	°C	
Cooling	Free Air Convection (See Derating Curve)					
Humidity	RH, Non-condensing			95	%	
Physical						
Case Size	1.44 x 1.06 x 0.67 Inches (36.5 x 27.0 x 17.1 mm)					
Case Material	Non-Conductive Plastic & Fiberglass (UL94-V0)					
Weight	0.91 Oz (26g)					
Reliability Specifications						
Parameter	Conditions	Min.	Typ.	Max.	Units	
MTBF	MIL HDBK 217F, 25°C, Gnd Benign	350			kHours	
Safety Approvals	IEN 60950, IEC 60950					
Safety Class	IEC 61140 Class II					


www.micropowerdirect.com

Model Number	Input		Output 1 (See Note 1)				Output 2 (See Note 1)				Maximum Output Power (W)	Efficiency (% Typ)
	Current (A)		Voltage (VDC)	Current (A)		Maximum Cap. Load (μF)	Voltage (VDC)	Current (A)		Maximum Cap. Load (μF)		
	115 VAC	230 VAC		Max. (A)	Min. (%)			Max. (A)	Min. (%)			
MPM-04S-03	0.075	0.055	3.3	1.200	0.0	14,000					3.96	70
MPM-04S-05	0.075	0.055	5.0	800	0.0	8,000					4.0	72
MPM-04S-08	0.075	0.055	8.0	500	0.0	2,700					4.0	76
MPM-04S-09	0.075	0.055	9.0	444	0.0	2,400					4.0	76
MPM-04S-12	0.075	0.055	12.0	333	0.0	1,000					4.0	76
MPM-04S-14	0.075	0.055	14.0	286	0.0	750					4.0	76
MPM-04S-15	0.075	0.055	15.0	267	0.0	700					4.0	76
MPM-04S-24	0.075	0.055	24.0	167	0.0	220					4.0	77
MPM-04D-0503	0.085	0.065	+5.0	+600	0.0	5,600	+3.3	+150	0.0	4,700	3.5	73
MPM-04D-0805	0.085	0.065	+8.0	+375	0.0	1,000	+5.0	+120	1.0	4,700	3.6	76
MPM-04D-1205	0.085	0.065	+12.0	+250	0.0	330	+5.0	+120	1.0	4,700	3.6	77

Notes:

- For dual output models, Output 1 is +Vo and Output 2 is +Vr. A 47 μF/25V ceramic capacitor must be connected from +Vo (pin 12) of dual output models to Common (pin 11). Without this capacitor, the unit may not meet all specifications.
- For dual output models, output voltage accuracy is specified as ±2% for +Vo and ±5% for +Vr.
- For dual output models, line regulation is specified as ±0.2% for +Vo and ±3% for +Vr.
- For model **MPM-04S-24**, ripple is specified as 150 mV p-p and noise is specified as 200 mV p-p.
- Output short circuit protection is provided by a "hiccup mode" circuit. The unit recovers automatically when the fault condition is removed.
- Operation at under no load conditions will not damage these units. It is recommended that the minimum load values in the table above be used.
- It is recommended that a fuse be used on the input of a power supply for protection. For the **MPM-04** series, a 1A/250 VAC slow blow should be used.

Mechanical Dimensions

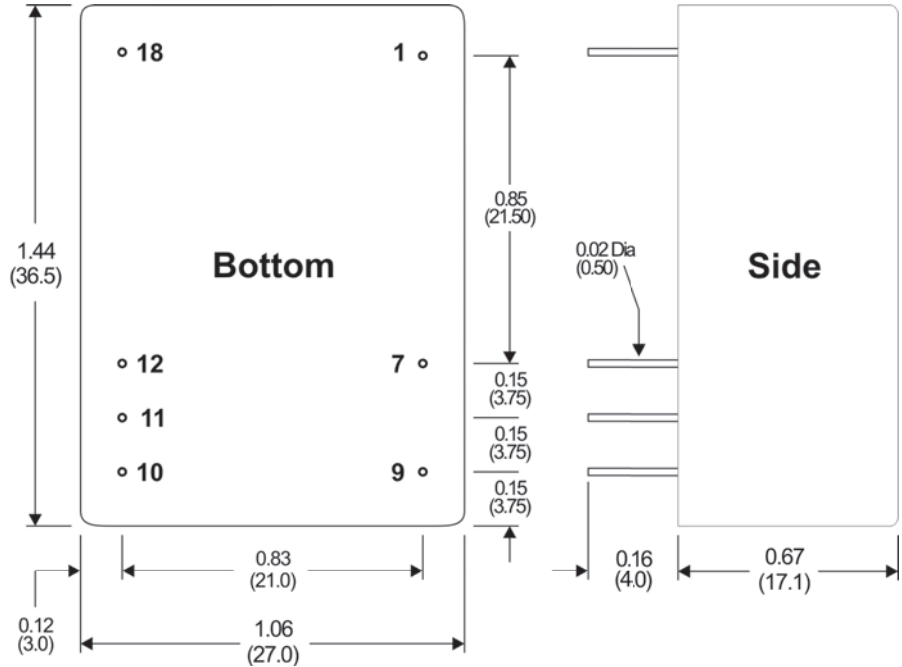


MPM-04X-YYYY

Outputs
S = Single
D = Dual

Output Voltage Selection
(i.e. 05 = 5 VDC,
1205 = 12 & 5 VDC, etc)

Derating Curve

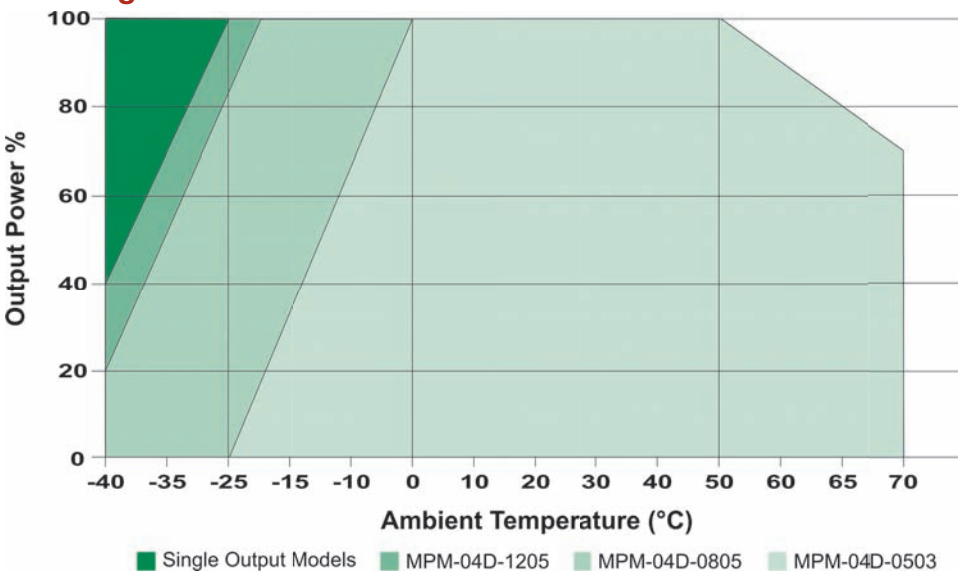

Notes:

- All dimensions are typical in inches (mm)
- Tolerance x.xx = ±0.01 (±0.25)

Pin Connections

Pin	Single	Dual
1	NC	NC
7	AC-Neutral	AC-Neutral
9	AC-Line	AC-Line
10	NC	+Vr
11	-Vo	Common
12	+Vo	+Vo
18	NC	NC

NC = No Connection



MicroPower Direct
We Power Your Success - For Less!

292 Page Street Ste D Stoughton, MA 02072 • TEL: (781) 344-8226 • FAX: (781) 344-8481 • E-Mail: sales@micropowerdirect.com