




25W Universal Input, Compact PCB PSA25LS Open Frame with C14 Connector

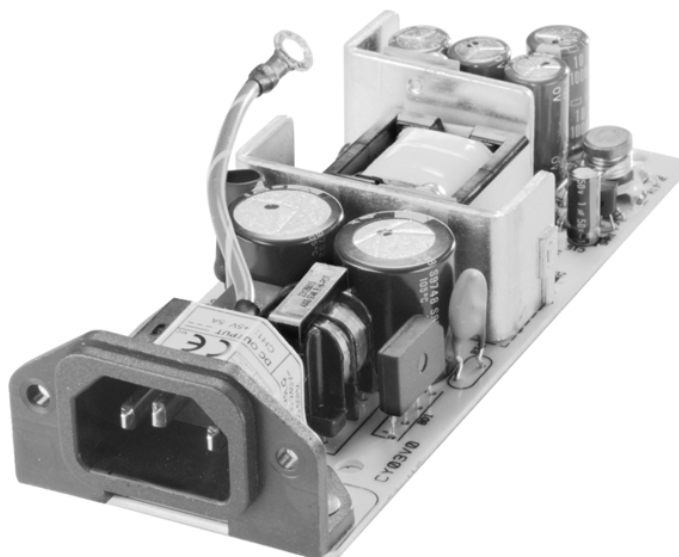

Features

- Compact 2" x 5" PCB
- CISPR 22B; FCC B EMI
- Low .85" Profile
- Integral AC Connector

Applications

- Networking
- Compact Equipment
- Peripherals and Terminals
- Microcomputers

Safety Approvals Pending

- cUL 1950, 3rd Edition
- CE (Low Voltage Directive)
- TUV EN60950

Mechanical Characteristics

- Dimensions:
- Length: 127mm (5in)
 - Width: 50.8mm (2in)
 - Height: 21.5mm (0.846in)
 - Weight: 135gm (4.7oz)

Output Specifications

| Model | DC Output Voltage | Load | | Ripple(1) P-P | Regulation | | Max Power |
|-------------|----------------------|------|------|------------------|------------|------|--------------|
| | | Min. | Max. | | Line | Load | |
| PSA25LS-033 | 3.3V | 0A | 5A | 50mV | ±1% | ±2% | 16.5W |
| PSA25LS-050 | 5.0V | 0A | 5A | 50mV | ±1% | ±2% | 25.0W |

(1) Measured at full load by using a 12 inch twisted pair terminated with a 10mfd capacitor and a 0.1mfd ceramic in parallel

INPUT:**AC Input Voltage**

85 to 264 VAC

AC Input Frequency

47 to 63Hz

AC Input Current

0.5Arms (120VAC)

0.25Arms (240VAC)

AC Inrush Current (Cold)

30A max. (120VAC)

60A max. (240VAC)

Efficiency

70% Typical

OUTPUT:**Hold-up Time**

16ms Full load, 120VAC

Overvoltage Protection

Zener Diode Clamping

Overcurrent Protection

Auto Restart

ENVIRONMENTAL:**Operation Temperature (Convection)**

0 to 50°C

Storage Temperature

-25 to +75°C

Humidity

20 to 90% RH (Non-condensing)

Emissions

FCC Class B

EN 55022 B

Immunity

EN 50082-1: 1997

61000-4-2, Level 3

61000-4-3, Level 2

61000-4-4, Level 2

61000-4-5, Level 3

61000-4-6, Level 2

61000-4-11

GENERAL:**Leakage Current**

Less than 0.75mA (254VAC)

Dielectric Withstand (Hipot)Input to Output
3000VAC, 1 min., 10mA**Switching Frequency**

100KHz (typical)

MTBF (Full Load, 25°C)

MIL-HDBK-217F: 150K hrs.

AC Input Connector

EN 60320/C14

DC Output Connector

Molex 09-65-2048 or Equivalent

Dimension Diagram Unit: mm (inch)