

**SPECIFICATIONS**

Switch Function	4P2T
Electrical Ratings	200mA @ 30VDC
Electrical Life	10,000 cycles typical
Contact Resistance	< 50 mΩ initial
Actuation Force	250 +/- 100gF
Actuator Travel	2.0 mm
Dielectric Strength	1000Vrms min
Insulation Resistance	> 100MΩ min
Operating Temperature	-40°C to 85°C
Storage Temperature	-40°C to 85°C




**MATERIALS ←RoHS COMPLIANT**

Actuator	PBT
Housing	Steel
Base	Phenolic
Contacts	Phosphor Bronze, Silver Plated
Terminals	Brass, Silver Plated

**ORDERING INFORMATION**

<b>1. Series:</b>	<b>MS4208</b>	<b>L4</b>
	MS4208	
<b>2. Actuator Length:</b>		
	L4 = 4mm	
	L6 = 6mm	

**DIMENSIONS**

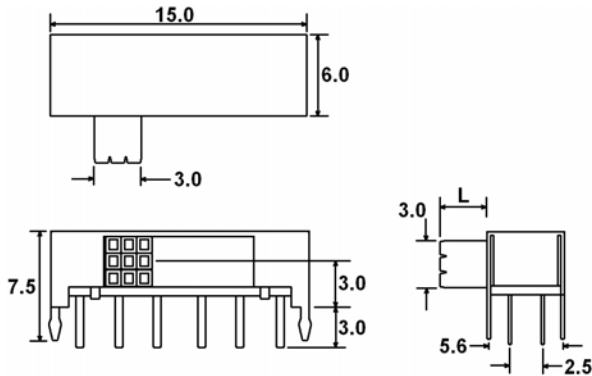

**SCHEMATIC & PC LAYOUT**

