

■ General Description


The AME431B series ICs are 3-terminal adjustable shunt regulator with guaranteed temperature stability over a full operation range. These ICs feature sharp turn-on characteristics, low temperature coefficient and low output impedance, which make them ideal substitutes for Zener diodes in applications such as switching power supply, charger and other adjustable regulators.

The reference is set to 1.24V for AME431Bxxxxx12. The output voltage can be set to 1.24V to 16V for $V_{REF}=1.24V$ part type with two external resistors.

The AME431B precision reference is offered in two reference tolerance: 0.5% and 1.0%

The 5 main packages have low thermal impedance which allows operation over a wide range of $-40^{\circ}C$ to $+125^{\circ}C$.

■ Functional Block Diagram

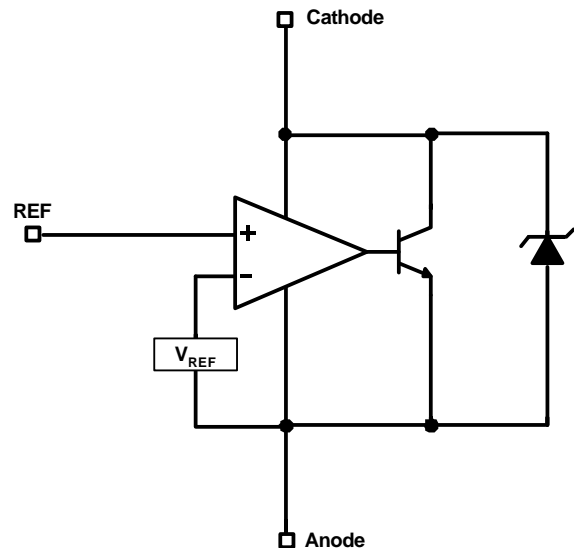

■ Features


- Very Accurate Reference Voltage : 0.15% Typical
- High Stability under Capacitive Load
- Low Temperature Deviation: 4.5mV Typical
- Low Equivalent Full-range Temperature Coefficient with 20PPM/ $^{\circ}C$ Typical
- Low Dynamic Output Resistance: 0.2Ω Typical
- Sink Current Capacity from 1mA to 100mA
- Low Output Noise
- Available in 7 Packages: TO-92, SOT-23, TSOT-23, SOT-89, SOP-8 and SOT-25, TSOT-25
- All AME' s Lead Free Products Meet RoHS Standards

■ Applications


- Adjustable Power Supplies
- Linear Regulators
- Battery Operated Computer
- Portable Electronics
- Instrumentation
- Switching Power Supply
- Mother Board
- LCD Monitor
- Note Book Computer

■ Typical Applications


Shunt Regulator


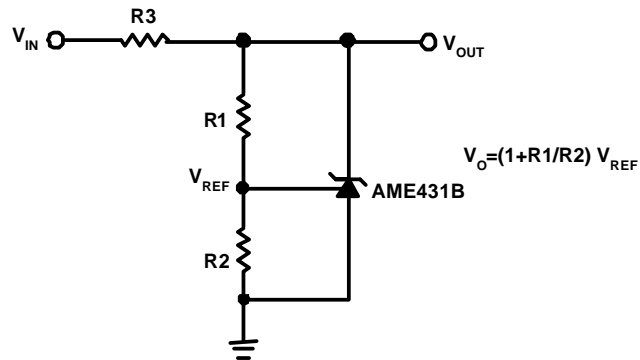


High Current Shunt Regulator

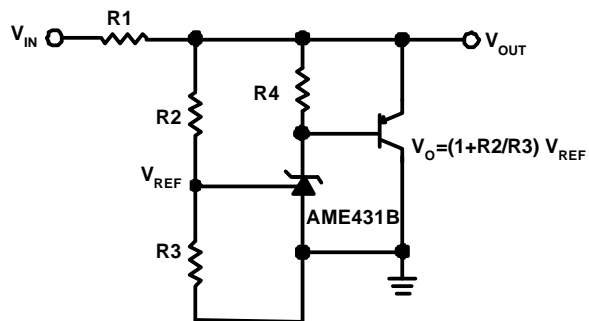







Current Source or Current Limit

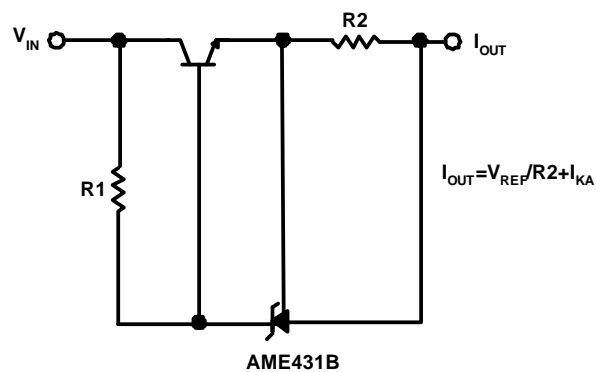

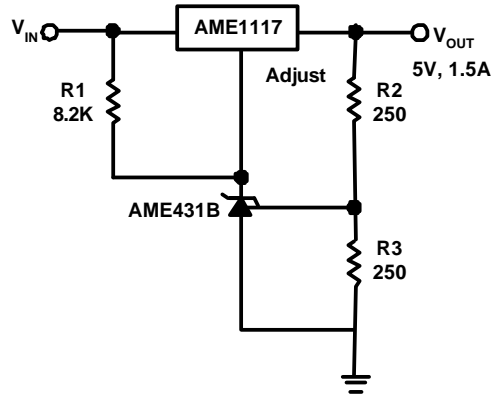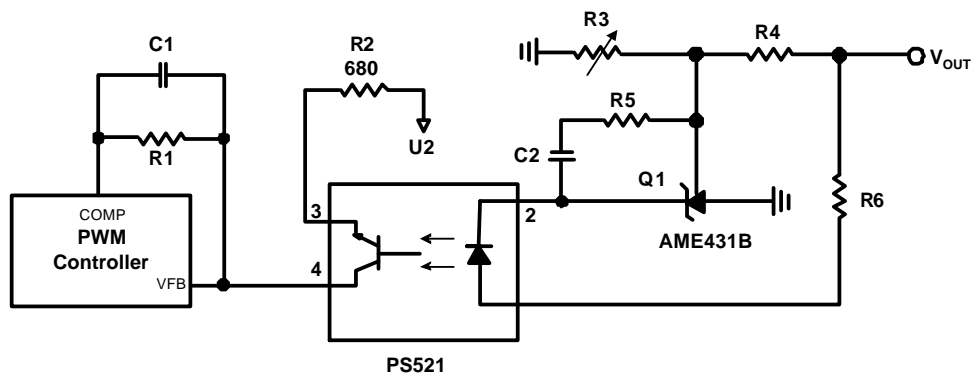■ Typical Applications (contd.)
Precision 5V 1.5A Regulator

Precision 5V 1.5A Regulator


AME431B-1.24V

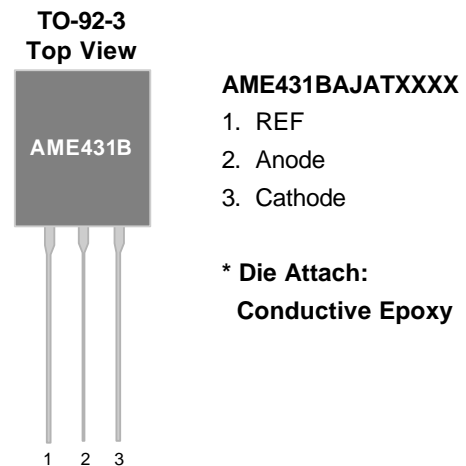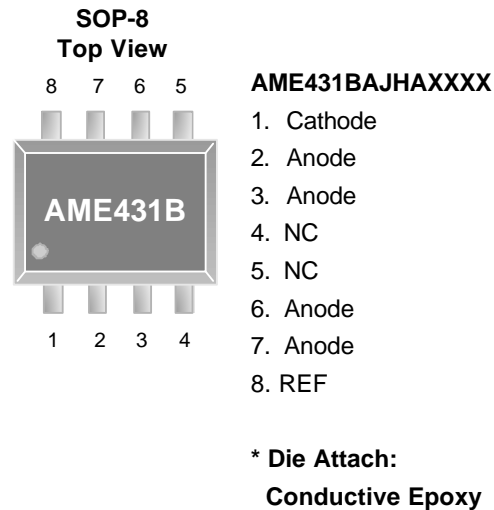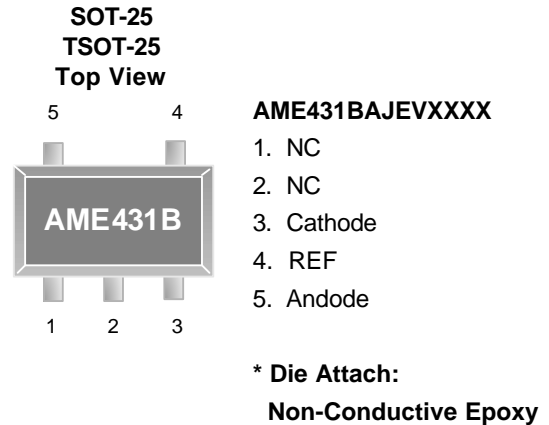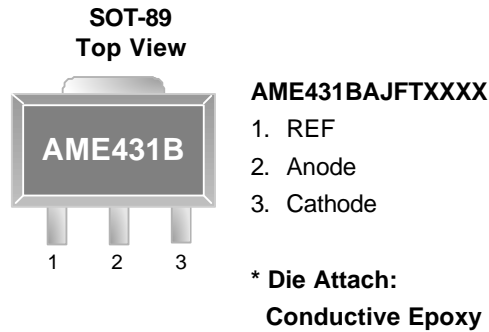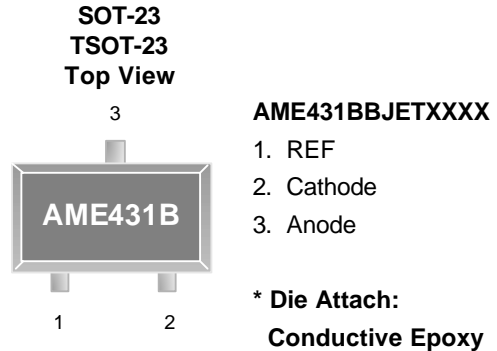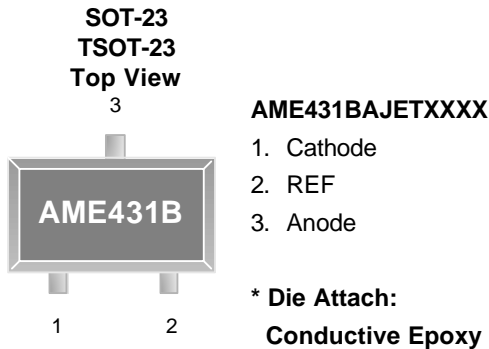■ Pin Configuration






Adjustable Precision Shunt Regulator

AME431B-1.24V

Ordering Information

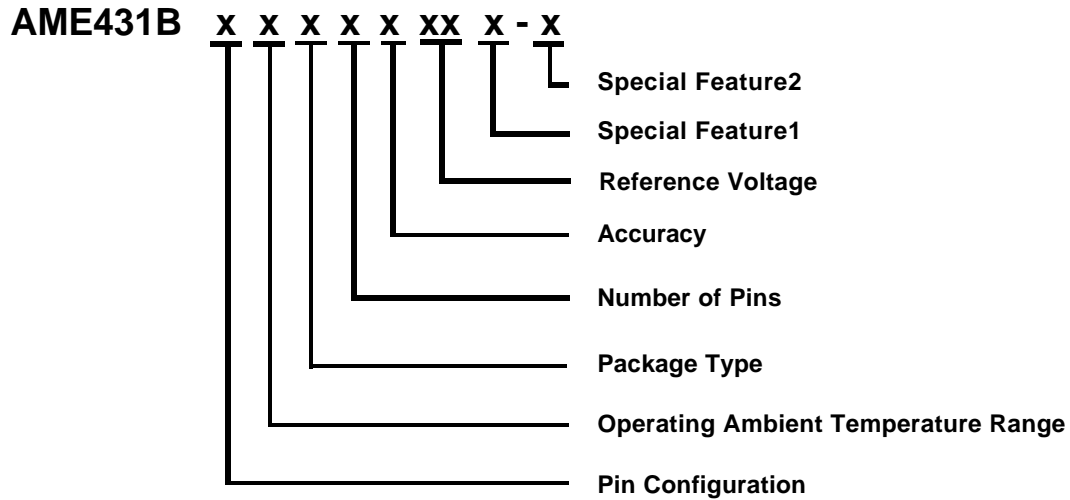

Pin Configuration	Operating Ambient Temperature Range	Package Type	Number of Pins	Accuracy	Reference Voltage	Special Feature1	Special Feature2 (For TO-92 Package Only)
A 1. Cathode (SOT-23) 2. REF (TSOT-23) 3. Anode B 1. REF (SOT-23) 2. Cathode (TSOT-23) 3. Anode A 1. REF (SOT-89) 2. Anode 3. Cathode A 1. REF (TO-92-3) 2. Anode 3. Cathode A 1. Cathode (SOP-8) 2. Anode 3. Anode 4. NC 5. NC 6. Anode 7. Anode 8. REF A 1. NC (SOT-25) 2. NC (TSOT-25) 3. Cathode 4. REF 5. Anode	J: -40°C to +125°C	A: TO-92 E: SOT-2X F: SOT-89 H: SOP	A: 8 T: 3 V: 5	A: 0.5% B: 1.0%	12: 1.24V	L: Low profile Y: Lead free & Low profile Z: Lead free	Package Lead Pitch N/A: Taping 5.08mm 1: Bulk 2.54mm

AME431B-1.24V
■ Ordering Information (contd.)

Part Number	Marking*	Reference Voltage	Accuracy	Package	Operating Ambient Temperature Range
AME431BAJETA12	AZNww	1.24V	0.5%	SOT-23	- 40°C to +125°C
AME431BAJETA12L	AZNww	1.24V	0.5%	SOT-23	- 40°C to +125°C
AME431BAJETA12Y	AZNww	1.24V	0.5%	SOT-23	- 40°C to +125°C
AME431BAJETA12Z	AZNww	1.24V	0.5%	SOT-23	- 40°C to +125°C
AME431BAJETB12	AZOww	1.24V	1.0%	SOT-23	- 40°C to +125°C
AME431BAJETB12L	AZOww	1.24V	1.0%	SOT-23	- 40°C to +125°C
AME431BAJETB12Y	AZOww	1.24V	1.0%	SOT-23	- 40°C to +125°C
AME431BAJETB12Z	AZOww	1.24V	1.0%	SOT-23	- 40°C to +125°C
AME431BBJETA12	AZPww	1.24V	0.5%	SOT-23	- 40°C to +125°C
AME431BBJETA12L	AZPww	1.24V	0.5%	SOT-23	- 40°C to +125°C
AME431BBJETA12Y	AZPww	1.24V	0.5%	SOT-23	- 40°C to +125°C
AME431BBJETA12Z	AZPww	1.24V	0.5%	SOT-23	- 40°C to +125°C
AME431BBJETB12	AZQww	1.24V	1.0%	SOT-23	- 40°C to +125°C
AME431BBJETB12L	AZQww	1.24V	1.0%	SOT-23	- 40°C to +125°C
AME431BBJETB12Y	AZQww	1.24V	1.0%	SOT-23	- 40°C to +125°C
AME431BBJETB12Z	AZQww	1.24V	1.0%	SOT-23	- 40°C to +125°C
AME431BAJEVA12	BAWww	1.24V	0.5%	SOT-25	- 40°C to +125°C
AME431BAJEVA12L	BAWww	1.24V	0.5%	TSOT-25	- 40°C to +125°C
AME431BAJEVA12Z	BAWww	1.24V	0.5%	SOT-25	- 40°C to +125°C
AME431BAJEVA12Y	BAWww	1.24V	0.5%	TSOT-25	- 40°C to +125°C

Note: yyww & ww represents the date code and pls refer to Date Code Rule before Package Dimension.

* A line on top of the first letter represents lead plating such as \bar{A} ZN

Please consult AME sales office or authorized Rep./Distributor for output voltage and package type availability.

AME431B-1.24V
■ Ordering Information

Part Number	Marking*	Reference Voltage	Accuracy	Package	Operating Ambient Temperature Range
AME431BAJEVB12	BAVww	1.24V	1.0%	SOT-25	- 40°C to +125°C
AME431BAJEVB12L	BAVww	1.24V	1.0%	TSOT-25	- 40°C to +125°C
AME431BAJEVB12Z	BAVww	1.24V	1.0%	SOT-25	- 40°C to +125°C
AME431BAJEVB12Y	BAVww	1.24V	1.0%	TSOT-25	- 40°C to +125°C
AME431BAJFTA12Z	A431B BKYww	1.24V	0.5%	SOT-89	- 40°C to +125°C
AME431BAJATA12Z	AME12 431B AJATA yyww	1.24V	0.5%	TO92-3	- 40°C to +125°C
AME431BAJATA12Z-1	AME12 431B AJATA yyww	1.24V	0.5%	TO92-3	- 40°C to +125°C
AME431BAJATB12Z	AME12 431B AJATB yyww	1.24V	1.0%	TO92-3	- 40°C to +125°C
AME431BAJATB12Z-1	AME12 431B AJATB yyww	1.24V	1.0%	TO92-3	- 40°C to +125°C

AME431B-1.24V**■ Absolute Maximum Ratings**

Parameter	Maximum	Unit
Cathode Current	100	mA
Cathode Voltage	18	V

Caution: Stress above the listed absolute maximum rating may cause permanent damage to the device

■ Recommended Operating Conditions

Parameter	Rating		Unit
Supply Current	1 to 100		mA
Operation Voltage Range	1.24 to 16		V
Ambient Temperature Range	T_A	-40 to +125	°C
Junction Temperature Range	T_J	-40 to +125	°C
Storage Temperature Range	T_{STG}	-65 to +150	°C

AME431B-1.24V
■ Thermal Information

Parameter	Package	Die Attach	Symbol	Maximum	Unit
Thermal Resistance (Junction to Case)	SOT-23** TSOT-23	Conductive Epoxy	θ_{JC}	81	°C / W
	SOT-89*			40	
	TO-92-3**			80	
	SOP-8**			60	
	SOT-25** TSOT-25	Non-Conductive Epoxy		140	
Thermal Resistance (Junction to Ambient)	SOT-23 TSOT-23	Conductive Epoxy	θ_{JA}	260	
	SOT-89			180	
	TO-92-3			150	
	SOP-8			150	
	SOT-25 TSOT-25	Non-Conductive Epoxy		280	
Internal Power Dissipation	SOT-23 TSOT-23	Conductive Epoxy	P_D	400	mW
	SOT-89			550	
	TO-92-3			625	
	SOP-8			810	
	SOT-25 TSOT-25	Non-Conductive Epoxy		400	
Maximum Junction Temperature				150	
Solder Iron (10 Sec)***				350	°C

* Measure θ_{JC} on backside center of tab.

** Measure θ_{JC} on center of molding compound if IC has no tab.

*** MIL-STD-202G210F

AME431B-1.24V

■ Electrical Specifications

TA = 25°C, I_{REF}=10mA unless otherwise specified

Parameter	Test Circuit	Symbol	Test Condition	Min	Typ	Max	Units	
Reference Voltage	0.5%	1	V _{REF}	V _{KA} - V _{REF} , I _{KA} =10mA	1.234	1.240	1.246	V
	1.0%				1.228	1.240	1.252	
Deviation of Reference Voltage Over Temperature	1	ΔV _{REF}	V _{KA} = V _{REF} I _{KA} =10mA	0°C ~ +70°C	-	2	10	mV
				-40°C ~ +85°C	-	3	10	
Ratio of Change in Reference Voltage to the Change in Cathode Voltage	2	ΔV _{REF} / ΔV _{KA}	I _{KA} =10mA	ΔV _{KA} = 5V to V _{REF}	-	-0.5	-1.5	mV/V
				ΔV _{KA} = 16V to 5V	-	-0.5	-1.5	
Reference Input Current	2	I _{REF}	I _{KA} =10mA R1=10KΩ, R2=∞	-	0.15	0.4	μA	
Deviation of Reference Current Over Full Temperature Range	2	ΔI _{REF}	R1=10KΩ, R2=∞ I _{KA} =10mA T _A = -40°C ~ +85°C	-	0.1	0.4	μA	
Minimum Cathode Current for Regulation	1	I _{KA} (MIN)	V _{KA} =V _{REF}	-	55	80	μA	
Off-State Cathode Current	3	I _{KA} (OFF)	V _{KA} =18V, V _{REF} =0V	-	0.04	0.1	μA	
Dynamic Impedance	1	Z _{KA}	V _{KA} = V _{REF} , I _{KA} =1 to 100mA F ≤ 1KHz	-	0.05	0.15	Ω	

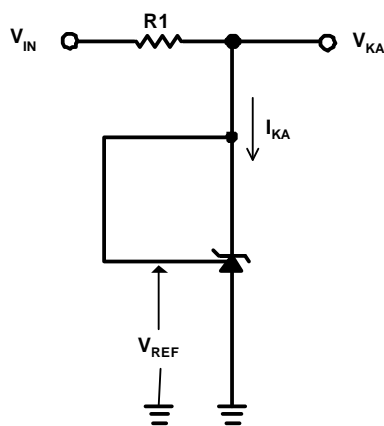


Figure1.
Test Circuit for V_{KA}=V_{REF}

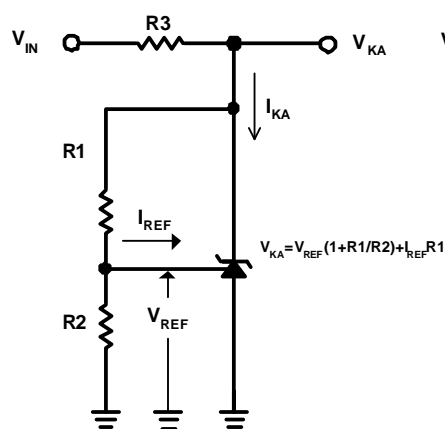


Figure2.
Test Circuit for V_{KA}>V_{REF}













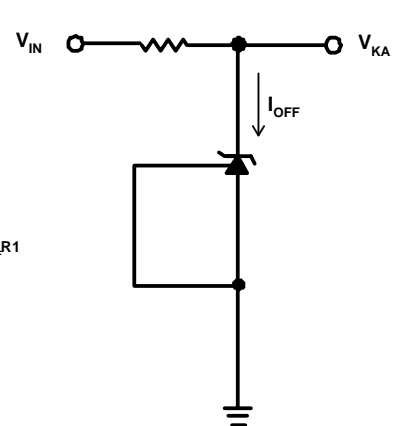






Figure3.
Test Circuit for I_{OFF}

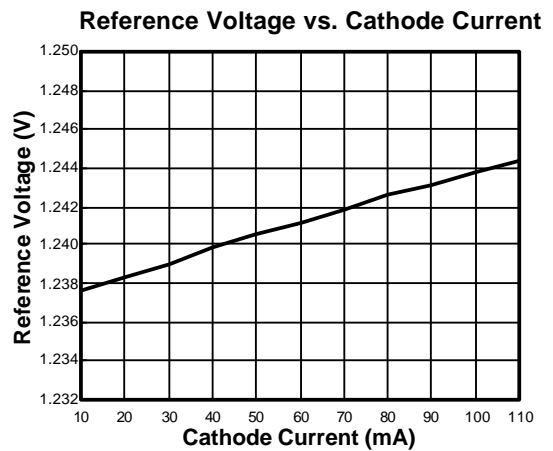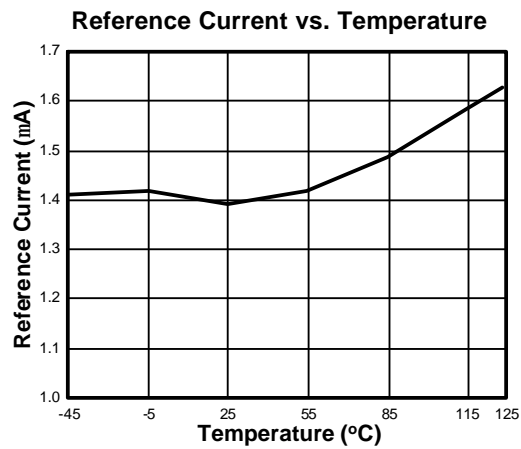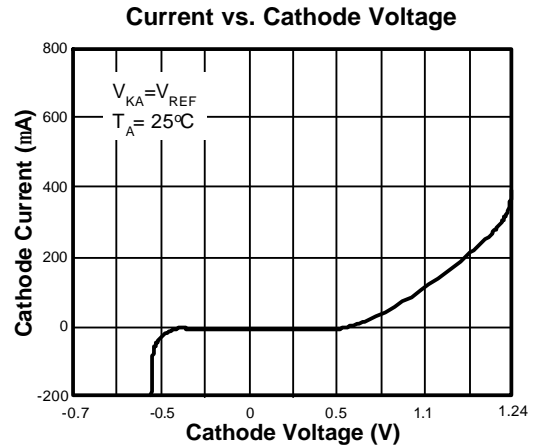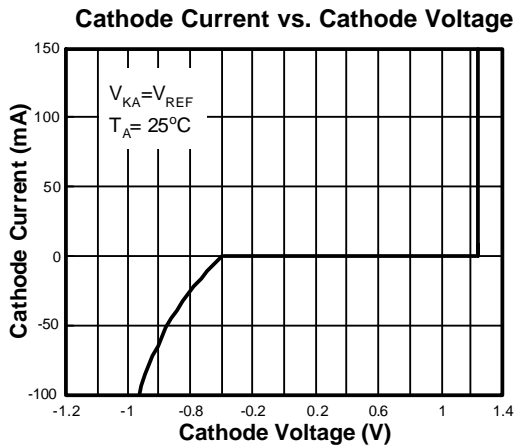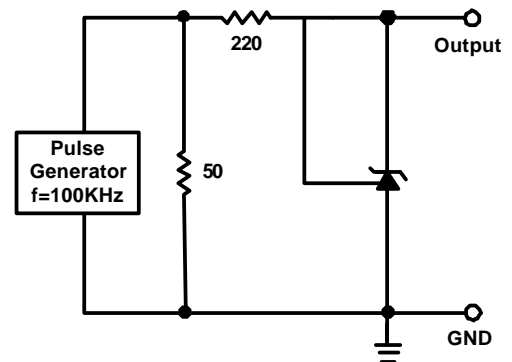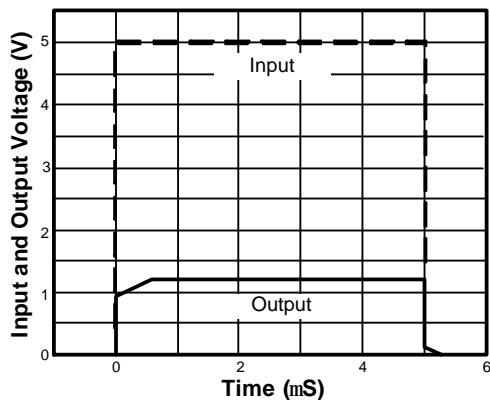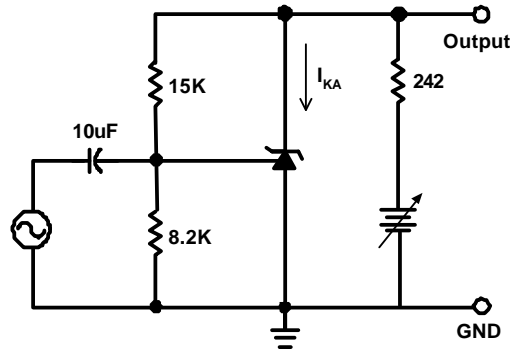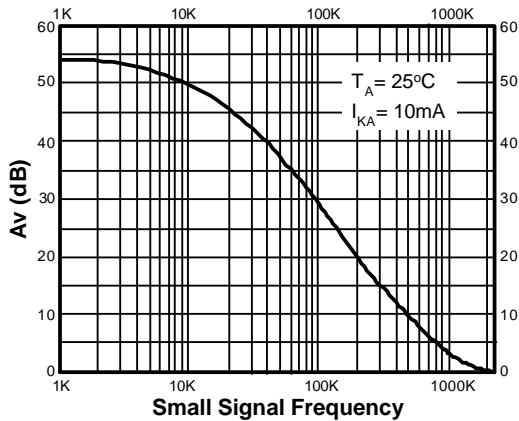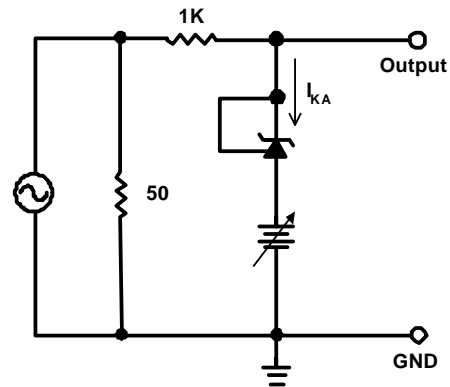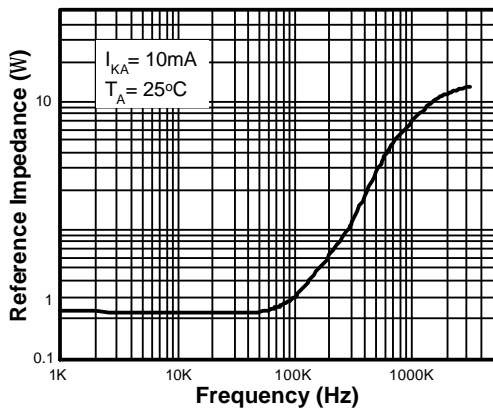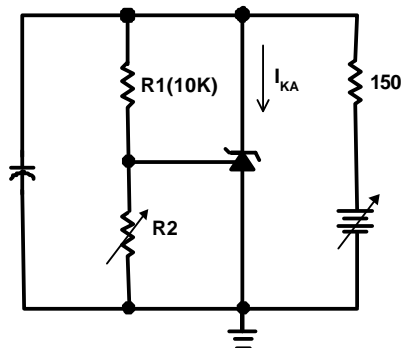

Small Signal Voltage Gain vs. Frequency

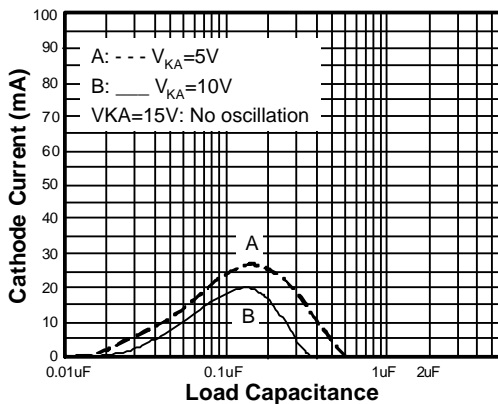


Small Signal Voltage Gain vs. Frequency

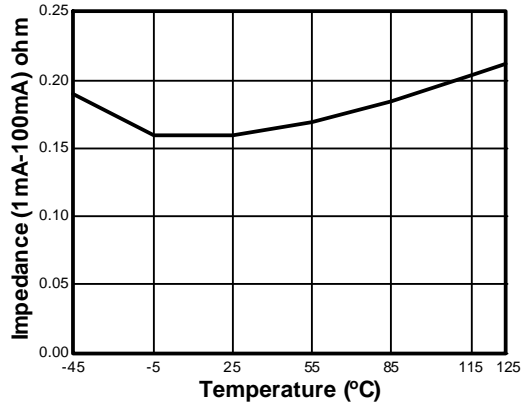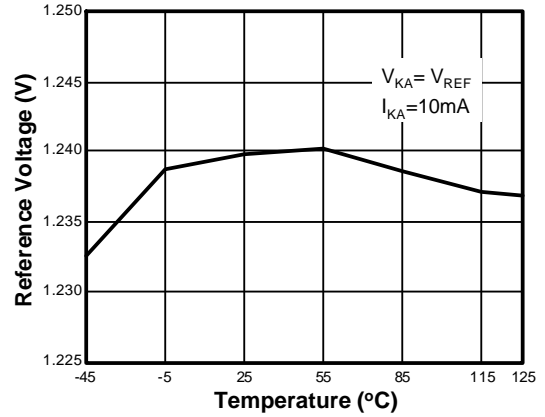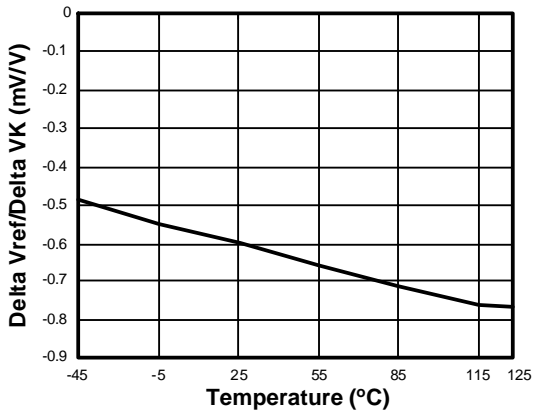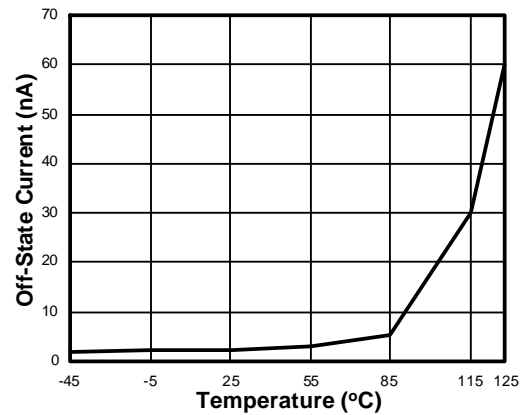Reference Impedance vs. Frequency

Stability Boundary Conditions vs. Load Capacitance


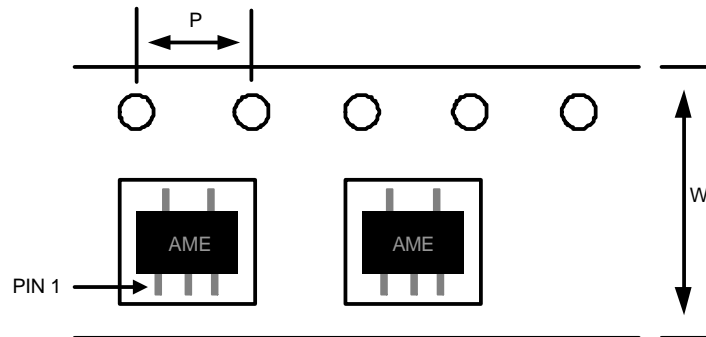
Impedance vs. Temperature

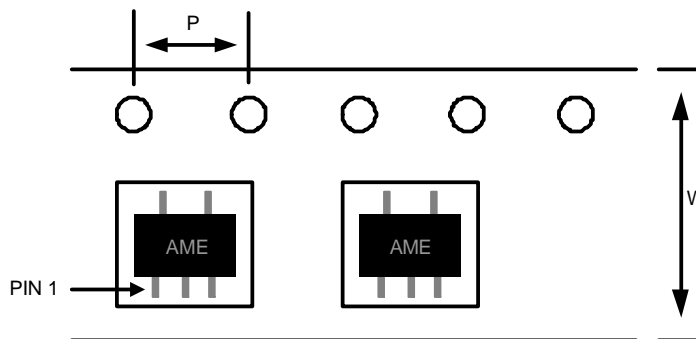Reference Voltage vs. Temperature

Delta Reference Voltage vs. Temperature

Off-State Current vs. Temperature


AME431B-1.24V
■ Date Code Rule


Marking			Date Code		Year
A	A	A	W	W	xxx0
A	A	A	W	<u>W</u>	xxx1
A	A	A	<u>W</u>	W	xxx2
A	A	A	<u>W</u>	<u>W</u>	xxx3
A	A	<u>A</u>	W	W	xxx4
A	A	<u>A</u>	W	<u>W</u>	xxx5
A	A	<u>A</u>	<u>W</u>	W	xxx6
A	A	<u>A</u>	<u>W</u>	<u>W</u>	xxx7
A	<u>A</u>	A	W	W	xxx8
A	<u>A</u>	A	W	<u>W</u>	xxx9

■ Tape and Reel Dimension
SOT-25

Carrier Tape, Number of Components Per Reel and Reel Size


Package	Carrier Width (W)	Pitch (P)	Part Per Full Reel	Reel Size
SOT-25	8.0±0.1 mm	4.0±0.1 mm	3000pcs	180±1 mm

AME431B-1.24V
■ Tape and Reel Dimension
TSOT-25

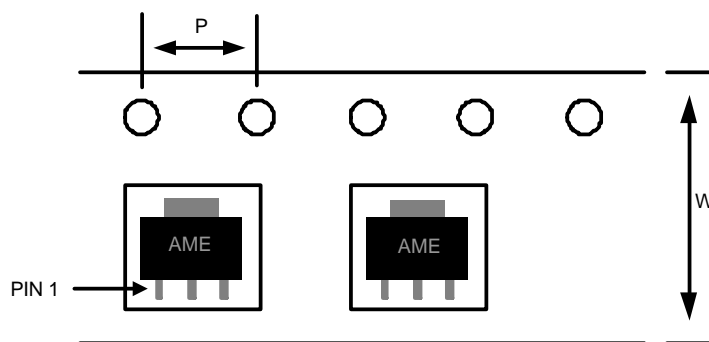Carrier Tape, Number of Components Per Reel and Reel Size


Package	Carrier Width (W)	Pitch (P)	Part Per Full Reel	Reel Size
TSOT-25	8.0±0.1 mm	4.0±0.1 mm	3000pcs	180±1 mm

SOT-89

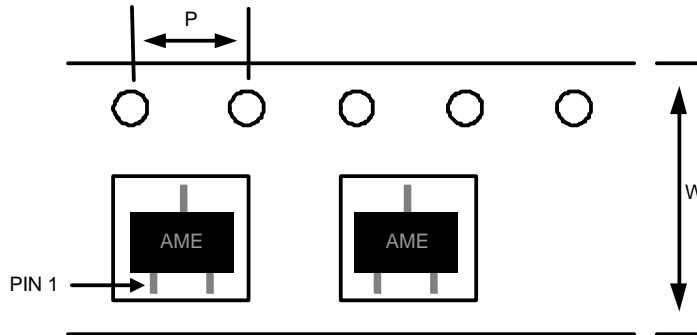Carrier Tape, Number of Components Per Reel and Reel Size


Package	Carrier Width (W)	Pitch (P)	Part Per Full Reel	Reel Size
SOT-89	12.0±0.1 mm	4.0±0.1 mm	1000pcs	180±1 mm

AME431B-1.24V
■ Tape and Reel Dimension
SOT-23

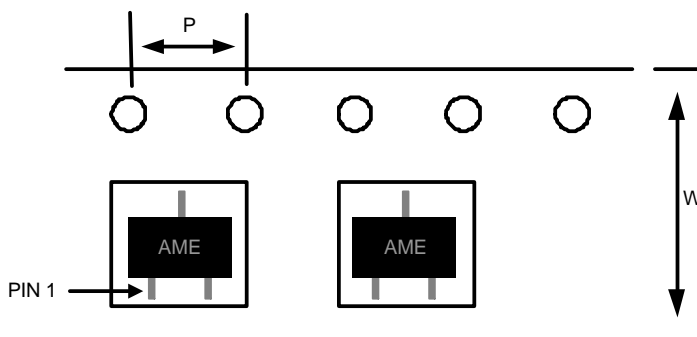Carrier Tape, Number of Components Per Reel and Reel Size


Package	Carrier Width (W)	Pitch (P)	Part Per Full Reel	Reel Size
SOT-23	8.0±0.1 mm	4.0±0.1 mm	3000pcs	180±1 mm

TSOT-23

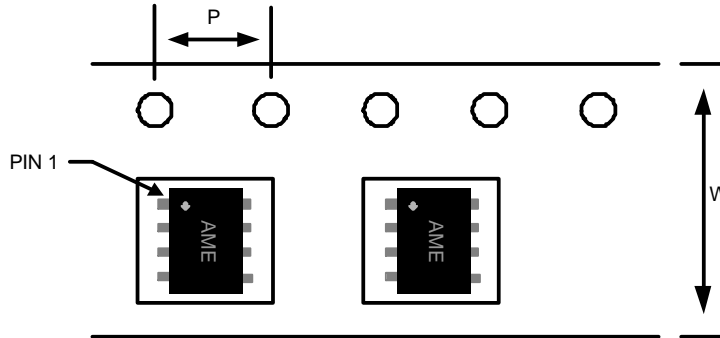Carrier Tape, Number of Components Per Reel and Reel Size

Package	Carrier Width (W)	Pitch (P)	Part Per Full Reel	Reel Size
TSOT-23	8.0±0.1 mm	4.0±0.1 mm	3000pcs	180±1 mm

AME431B-1.24V
■ Tape and Reel Dimension
SOP-8

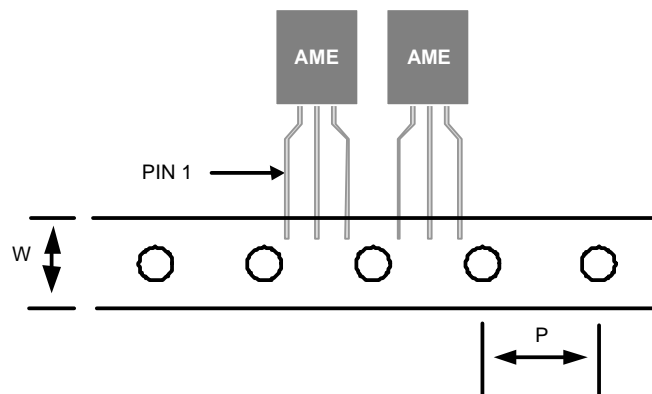Carrier Tape, Number of Components Per Reel and Reel Size

Package	Carrier Width (W)	Pitch (P)	Part Per Full Reel	Reel Size
SOP-8	12.0±0.1 mm	4.0±0.1 mm	2500pcs	330±1 mm


TO-92-3

Carrier Tape, Number of Components Per Reel and Reel Size

Package	Carrier Width (W)	Pitch (P)	Part Per Full Reel	Reel Size
TO-92-3	18.0 ^{+1.0} _{-0.5} mm	12.7±0.2 mm	2000pcs	N/A

AME431B-1.24V

■ Package Dimension

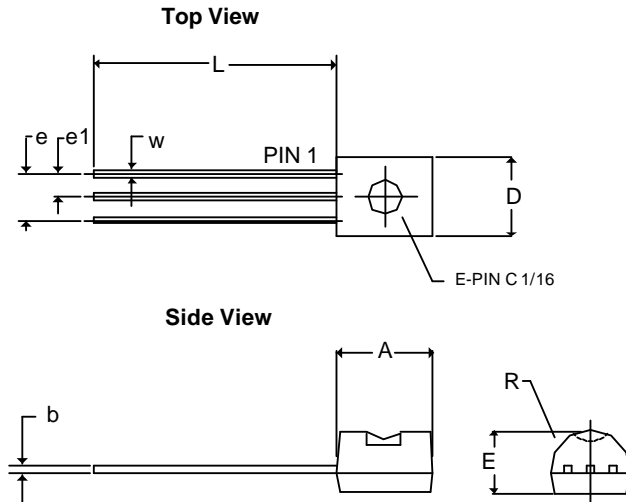TO-92-3 (bulk pack)




SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	2.80	4.95	0.1102	0.1949
b	0.40REF		0.0157REF	
E	3.94REF		0.1551REF	
e	2.54REF		0.1000REF	
e1	1.27REF		0.0500REF	
L	12.70	15.49	0.5000	0.6098
R	2.29		0.0902	
W	0.35	0.76	0.0138	0.0299
D	3.80	4.95	0.1496	0.1949

Notes:

1. Package outline exclusive of any mold flashes dimension.
2. Package outline exclusive of burr dimension.
3. Lead pitch=2.54mm is bulk pack.
4. Lead pitch=5.08mm is tape pack.


TO-92-3 (tape pack)

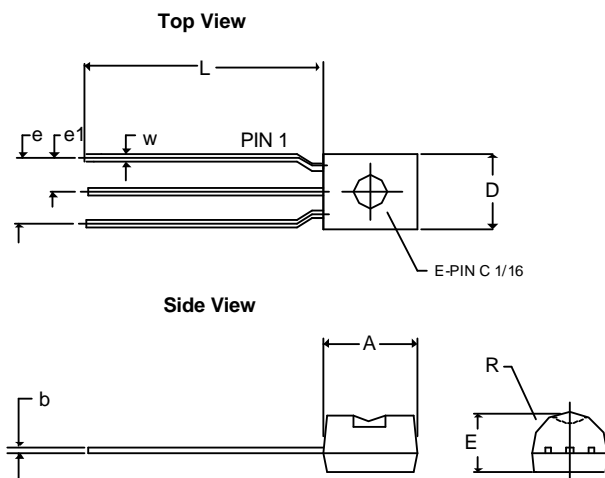


SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	2.80	4.95	0.1102	0.1949
b	0.40REF		0.0157REF	
E	2.40	3.94	0.0945	0.1551
e	5.08REF		0.2REF	
e1	2.54REF		0.1REF	
L	12.70	15.49	0.5000	0.6098
R	2.00		0.0787	
W	0.35	0.76	0.0138	0.0299
D	3.80	4.95	0.1496	0.1949

Notes:

1. Package outline exclusive of any mold flashes.
2. Package outline exclusive of burr dimension.
3. Lead pitch=2.54mm is bulk pack.
4. Lead pitch=5.08mm is tape pack.

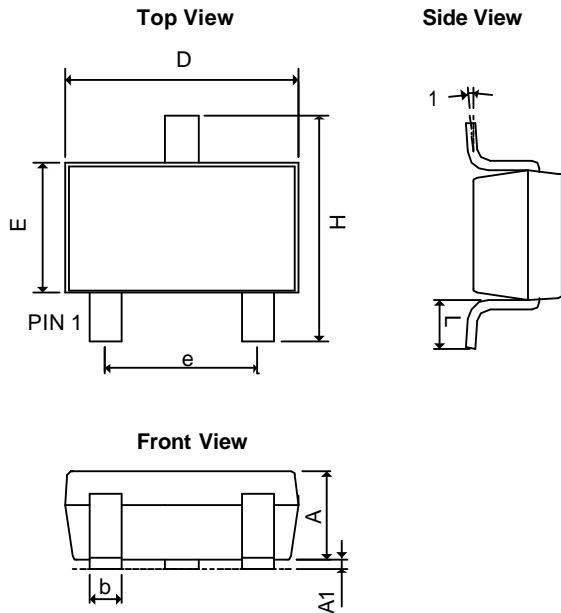■ Package Dimension
SOT-23


SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	1.00	1.40	0.0394	0.0551
A ₁	0.00	0.15	0.0000	0.0059
b	0.35	0.50	0.0138	0.0197
D	2.70	3.10	0.1063	0.1220
E	1.40	1.80	0.0551	0.0709
e	1.90 BSC		0.0748 BSC	
H	2.40	3.00	0.09449	0.11811
L	0.35BSC		0.0138BSC	
q1	0°	10°	0°	10°

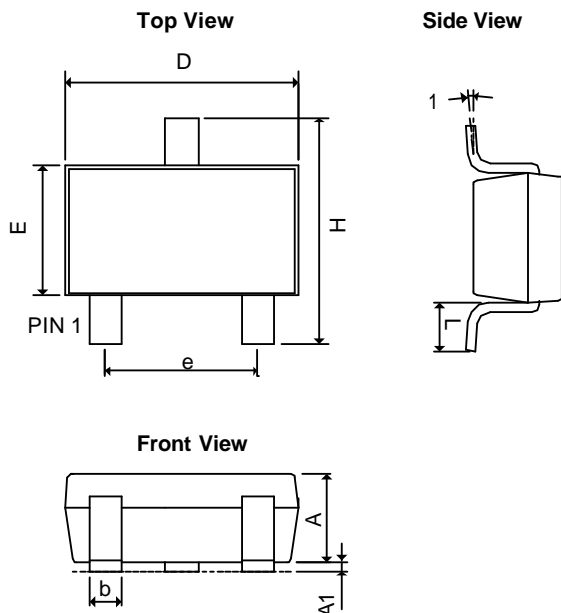
TSOT-23


SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A+A ₁	0.80	1.30	0.0315	0.0512
b	0.35	0.50	0.0138	0.0197
D	2.70	3.10	0.1063	0.1220
E	1.20	1.80	0.0472	0.0709
e	1.90 BSC		0.0748 BSC	
H	2.40	3.00	0.09449	0.11811
L	0.35BSC		0.0138BSC	
81	0°	10°	0°	10°

AME431B-1.24V


■ Package Dimension

SOT-89

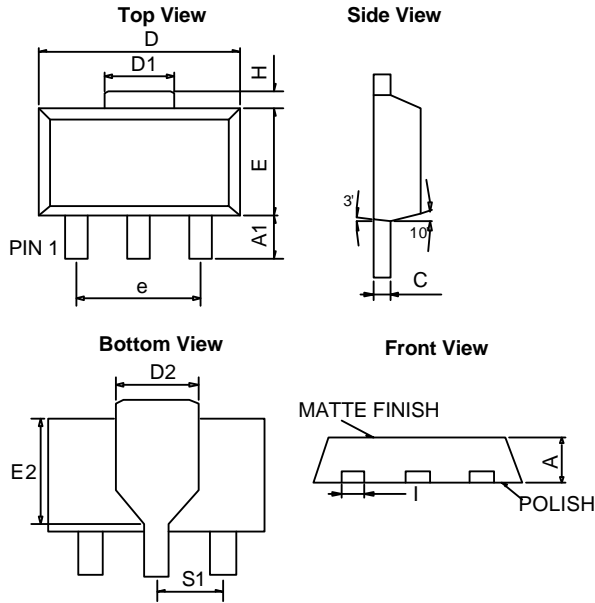

SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	1.39	1.60	0.05472	0.06299
A₁	0.8 REF		0.03150 REF	
C	0.35	0.44	0.01378	0.01732
D	4.39	4.60	0.17283	0.18110
D₁	1.35	1.83	0.05315	0.07205
E	2.28	2.60	0.08976	0.10236
I	0.36	0.56	0.01417	0.02204
e	3.00 REF		0.11811 REF	
H	0.70 REF		0.02756 REF	
S1	1.50 REF		0.05906 REF	
E2	2.05	2.60	0.08071	0.10236
D2	1.50	1.85	0.05905	0.07283

SOP-8

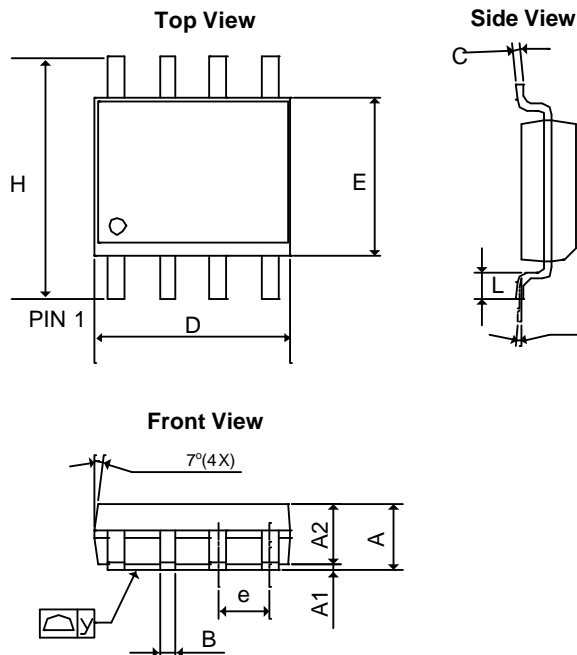


SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	1.35	1.75	0.05315	0.0689
A₁	0.10	0.30	0.00394	0.01181
A2	1.473 REF		0.05799 REF	
B	0.33	0.51	0.01299	0.02008
C	0.19	0.25	0.00748	0.00984
D	4.80	5.33	0.18898	0.20984
E	3.80	4.00	0.14961	0.15748
e	1.27 BSC		0.05000 BSC	
L	0.40	1.27	0.01575	0.05000
H	5.80	6.30	0.22835	0.24803
y	-	0.10	-	0.00394
q	0°	8°	0°	8°

AME431B-1.24V


■ Package Dimension

SOT-25

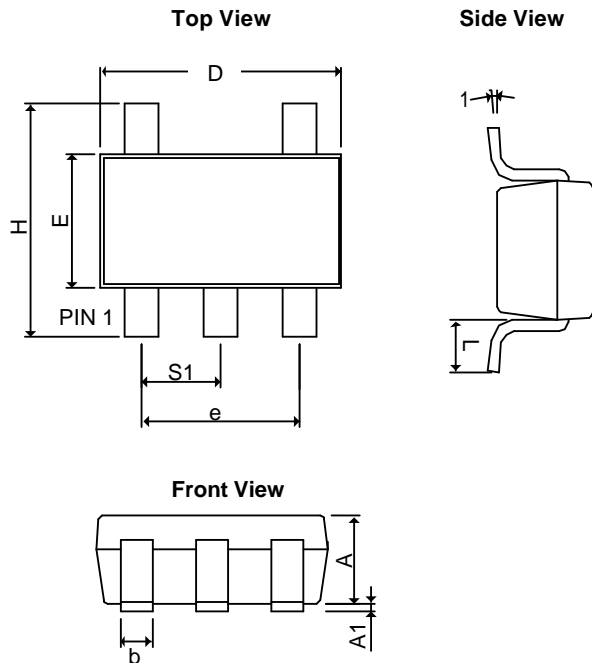

SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	1.20REF		0.0472REF	
A ₁	0.00	0.15	0.0000	0.0059
b	0.30	0.55	0.0118	0.0217
D	2.70	3.10	0.1063	0.1220
E	1.40	1.80	0.0551	0.0709
e	1.90 BSC		0.07480 BSC	
H	2.60	3.00	0.10236	0.11811
L	0.37BSC		0.0146BSC	
q1	0°	10°	0°	10°
S ₁	0.95BSC		0.0374BSC	

TSOT-25

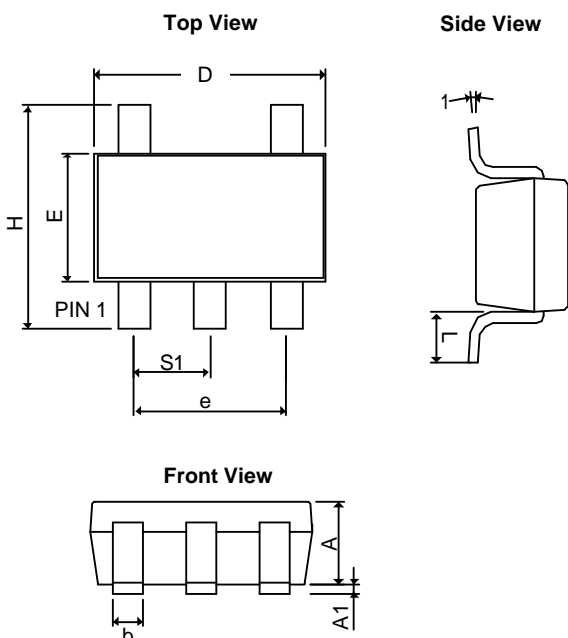

SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A+A ₁	0.90	1.25	0.0354	0.0492
b	0.30	0.50	0.0118	0.0197
D	2.70	3.10	0.1063	0.1220
E	1.40	1.80	0.0551	0.0709
e	1.90 BSC		0.07480 BSC	
H	2.40	3.00	0.09449	0.11811
L	0.35BSC		0.0138BSC	
q1	0°	10°	0°	10°
S ₁	0.95BSC		0.0374BSC	



www.ame.com.tw
E-Mail: sales@ame.com.tw

Life Support Policy:

These products of AME, Inc. are not authorized for use as critical components in life-support devices or systems, without the express written approval of the president of AME, Inc.

AME, Inc. reserves the right to make changes in the circuitry and specifications of its devices and advises its customers to obtain the latest version of relevant information.

© AME, Inc. , May 2010

Document: BCD-DS431B-E.05

Corporate Headquarter
AME, Inc.

2F, 302 Rui-Guang Road, Nei-Hu District

Taipei 114, Taiwan.

Tel: 886 2 2627-8687

Fax: 886 2 2659-2989