


0.2A High Voltage Fast Recovery Rectifiers

Features

- Fast recovery times
- Lost cost
- Designed for photo flash application
- Beveled round chip, avalanche operation
- RoHS compliance



DO-41



Mechanical Data

Case:	JEDEC DO-41 molded plastic body
Epoxy:	Plastic package has UL flammability classification 94V-0
Terminals:	Plated axial leads, solderable per MIL-STD-202, Method 208
Polarity:	Color band denotes cathode end
Weight:	0.012 ounces, 0.34 gram

Maximum Ratings and Electrical Characteristics ($T_A=25^\circ\text{C}$ unless noted otherwise)





Symbol	Description	GF225	GF230	Unit	Conditions
V_{RRM}	Maximum Recurrent Peak Reverse Voltage	2500	3000	V	
V_{RMS}	Maximum RMS Voltage	1750	2100	V	
V_{DC}	Maximum DC Blocking Voltage	2500	3000	V	
I_{F(AV)}	Maximum Average Forward Rectified Current	0.2		A	L=10mm, T _A =55° C
I_{FSM}	Peak Forward Surge Current	25		A	8.3ms single half sine-wave superimposed on rated load (JEDEC Method)
V_F	Maximum Instantaneous Forward Voltage	6.0		V	I _F =0.2A
I_R	Maximum DC Reverse Current at Rated DC Blocking Voltage	5.0		μA	T _A =25° C
T_{rr}	Typical Reverse Recovery Time	500		nS	I _F =0.5A, I _R =1A, I _{rr} =0.25A

0.2A High Voltage Fast Recovery Rectifiers

GF225/GF230

Symbol	Description	GF225	GF230	Unit	Conditions
C_J	Typical Junction Capacitance	6.0		pF	V _R =4V, f=1MHz
T_J	Operating Temperature range	-65 to +125		°C	
T_{STG}	Storage Temperature Range	-65 to +150		°C	


Typical Characteristics Curves

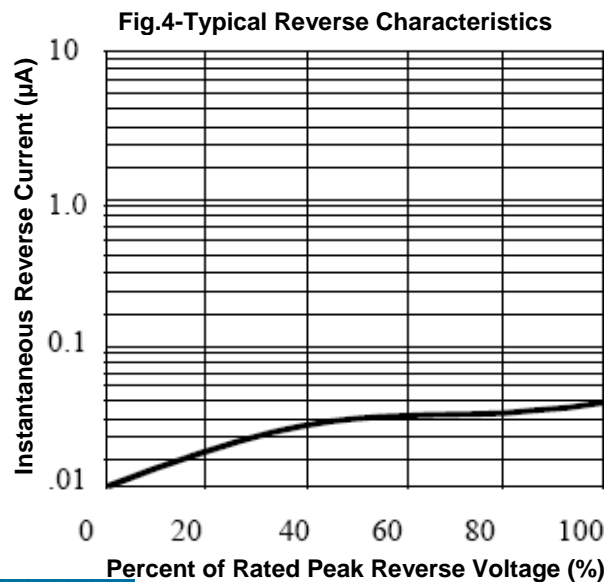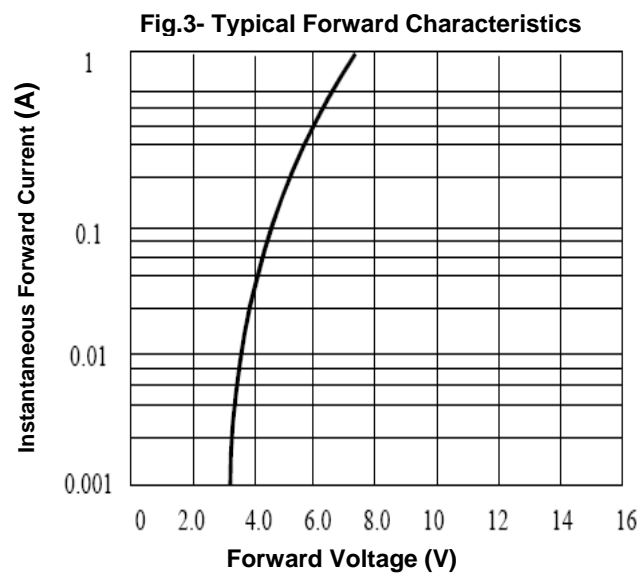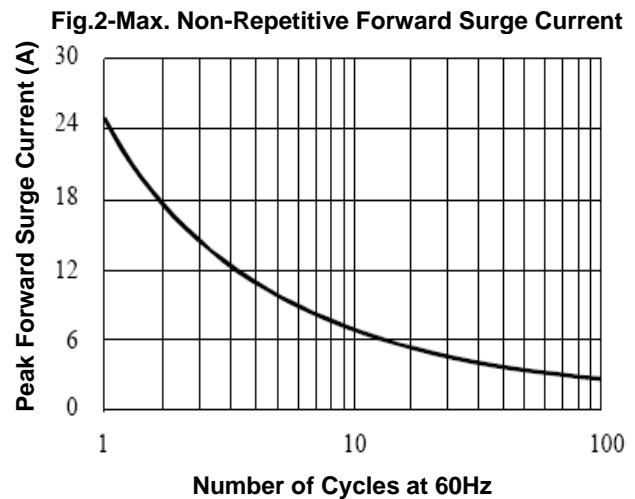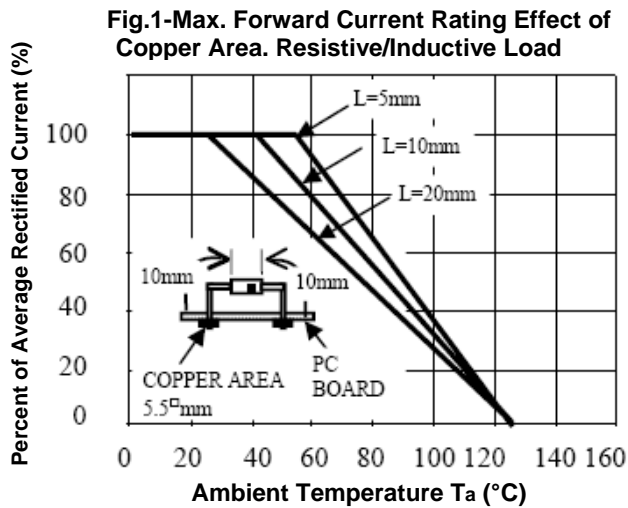


0.2A High Voltage Fast Recovery Rectifiers

GF225/GF230

Fig.5- Typical Junction Capacitance

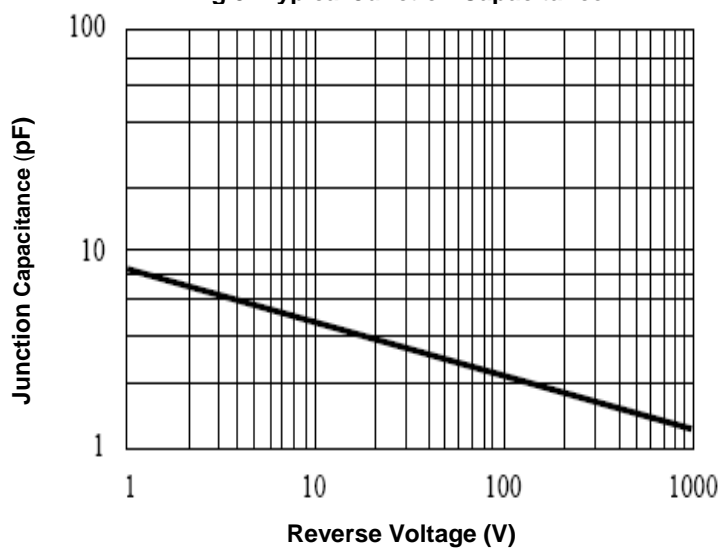

Dimensions in inches (mm)

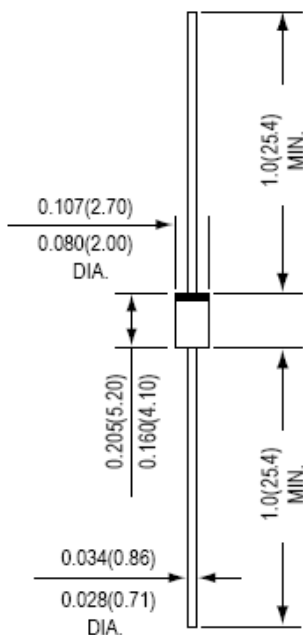

DO-41

TAITRON
components incorporated

Rev. A/AH 2008-05-04

0.2A High Voltage Fast Recovery Rectifiers

GF225/GF230

How to contact us:

US HEADQUARTERS

28040 WEST HARRISON PARKAWAY, VALENCIA, CA 91355-4162
Tel: (800) TAITRON (800) 824-8766 (661) 257-6060
Fax: (800) TAITFAX (800) 824-8329 (661) 257-6415
Email: taitron@taitroncomponents.com
Http://www.taitroncomponents.com

TAITRON COMPONENTS MEXICO, S.A .DE C.V.

BOULEVARD CENTRAL 5000 INTERIOR 5 PARQUE INDUSTRIAL ATITALAQUIA, HIDALGO C.P.
42970 MEXICO
Tel: +52-55-5560-1519
Fax: +52-55-5560-2190

TAITRON COMPONETS INCORPORATED E REPRESENTAÇÕES DO BRASIL LTDA

RUA DOMINGOS DE MORAIS, 2777, 2.ANDAR, SALA 24 SAÚDE - SÃO PAULO-SP 04035-001 BRAZIL
Tel: +55-11-5574-7949
Fax: +55-11-5572-0052

TAITRON COMPONETS INCORPORATED, SHANGHAI REPRESENTATIVE OFFICE

METROBANK PLAZA, 1160 WEST YAN' AN ROAD, SUITE 1503, SHANGHAI, 200052, CHINA
Tel: +86-21-5424-9942
Fax: +86-21-5424-9931