

E-Series 2-Way 0° Power Divider 5 – 500 MHz

MAPD-007249-ESML21
V1P


Features

- Surface mount
- Wide frequency range
- 2-Way—0°
- Lead Free
- RoHS* Compliant and is 260°C reflow compatible.
- Available on Tape and Reel.

Description

M/A-COM's MAPD-007249-ESML21 is a RoHS compliant 2 Way 0° Power Divider in a low cost, surface mount package. Ideally suited for high volume cellular and wireless applications. Parts are packaged in tape & reel.

SM-24 package

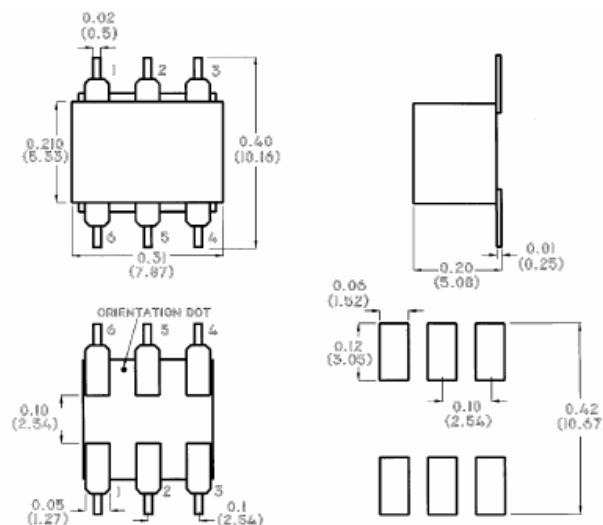

Pin Configuration

Pin No.	Function
1	Ground
2	Not Connected
3	Port 2
4	Port 1
5	Not Connected
6	Input

Ordering Information

Part Number	Package
MAPD-007249-ESML21	500 piece reel

Note: Reference Application Note M513 for reel size information.

Absolute Maximum Ratings ^{1,2}

Parameter	Absolute Maximum
Maximum Power Rating	1 Watt
Internal Load Dissipation	0.125 Watt
Pin Temperature (10 Sec)	250°C
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +125°C

1. Exceeding any one or combination of these limits may cause permanent damage to this device.
2. M/A-COM does not recommend sustained operation near these survivability limits.

This PRELIMINARY Data Sheet contains information regarding a product M/A-COM has under development. Performance is based on measured results and target specifications. Commitment to produce in volume is not guaranteed.

* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

**E-Series 2-Way 0° Power Divider
5 – 500 MHz**
**MAPD-007249-ESML21
V1P**
Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 50\Omega$ ¹

Parameter	Test Conditions	Frequency	Units	Min	Typ	Max
RF Frequency	—	5 - 500	MHz	—	—	—
Insertion Loss	F_L — f_U	5 - 500	dB	—	0.25	0.5
		50 –250	dB	—	0.3	0.5
		250 - 500	dB	—	0.5	1.0
Isolation	F_L — f_U	5 - 500	dB	25	50	—
		50 –250	dB	24	33	—
		250 - 500	dB	23	30	—
Amplitude Unbalance	F_L — f_U	5 - 500	dB	—	—	0.15
		50 –250	dB	—	—	0.3
		250 - 500	dB	—	—	0.6
Phase Unbalance	F_L — f_U	5 - 500	Degrees	—	—	1
		50 –250	Degrees	—	—	2
		250 - 500	Degrees	—	—	5