

### Typical Applications


The HMC520LC4 is ideal for:

- Point-to-Point and Point-to-Multi-Point Radio
- Digital Radio
- VSAT

### Features

- Wide IF Bandwidth: DC - 3.5 GHz
- Image Rejection: 40 dB
- LO to RF Isolation: 50 dB
- High Input IP3: +23 dBm
- RoHS Compliant 4 x 4 mm SMT Package

### Functional Diagram

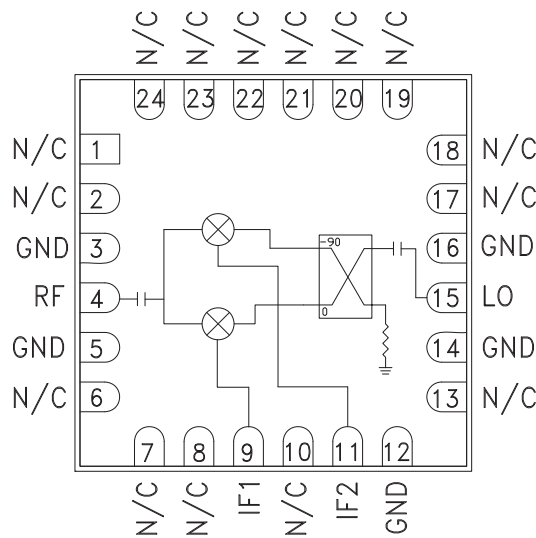

### General Description

The HMC520LC4 is a compact I/Q MMIC mixer in a leadless "Pb free" SMT package, which can be used as either an Image Reject Mixer or a Single Sideband Upconverter. The mixer utilizes two standard Hittite double balanced mixer cells and a 90 degree hybrid fabricated in a GaAs MESFET process. A low frequency quadrature hybrid was used to produce a 100 MHz USB IF output. This product is a much smaller alternative to hybrid style Image Reject Mixers and Single Sideband Upconverter assemblies. The HMC520LC4 eliminates the need for wire bonding allowing use of surface mount manufacturing techniques.

### Electrical Specifications, $T_A = +25^\circ \text{C}$ , $IF = 100 \text{ MHz}$ , $LO = +15 \text{ dBm}^*$

| Parameter                | Min.     | Typ. | Max. | Min.      | Typ. | Max. | Units |
|--------------------------|----------|------|------|-----------|------|------|-------|
| Frequency Range, RF/LO   | 6 - 10   |      |      | 7.1 - 8.5 |      |      | GHz   |
| Frequency Range, IF      | DC - 3.5 |      |      | DC - 3.5  |      |      | GHz   |
| Conversion Loss (As IRM) |          | 7    | 10   |           | 7    | 9    | dB    |
| Image Rejection          | 20       | 30   |      | 28        | 40   |      | dB    |
| 1 dB Compression (Input) |          | +12  |      |           | +12  |      | dBm   |
| LO to RF Isolation       | 35       | 45   |      | 40        | 50   |      | dB    |
| LO to IF Isolation       | 16       | 20   |      | 18        | 22   |      | dB    |
| IP3 (Input)              |          | +22  |      |           | +23  |      | dBm   |
| Amplitude Balance        |          | 0.3  |      |           | 0.2  |      | dB    |
| Phase Balance            |          | 4    |      |           | 4    |      | Deg   |


\* Unless otherwise noted, all measurements performed as downconverter.

For price, delivery, and to place orders, please contact Hittite Microwave Corporation:  
20 Alpha Road, Chelmsford, MA 01824 Phone: 978-250-3343 Fax: 978-250-3373  
Order On-line at [www.hittite.com](http://www.hittite.com)




Data Taken As IRM With External IF Hybrid


**Conversion Gain vs. Temperature**

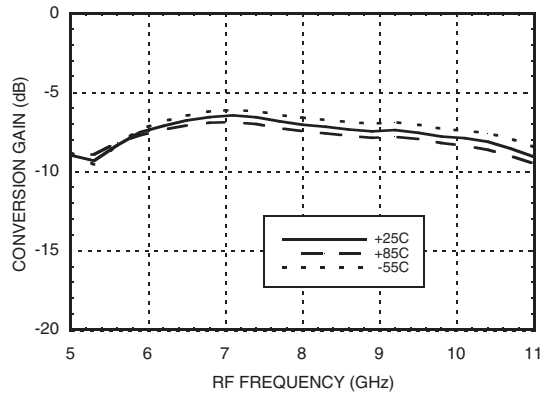


**Image Rejection vs. Temperature**

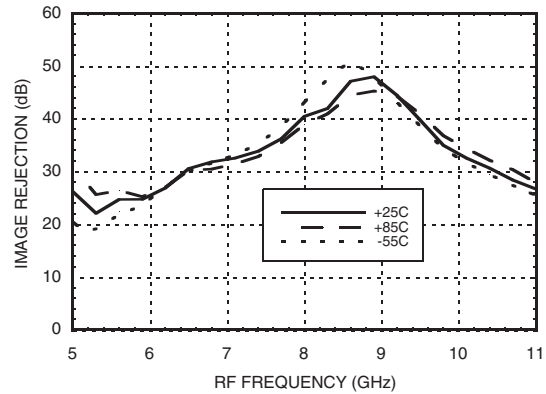


**Conversion Gain vs. LO Drive**

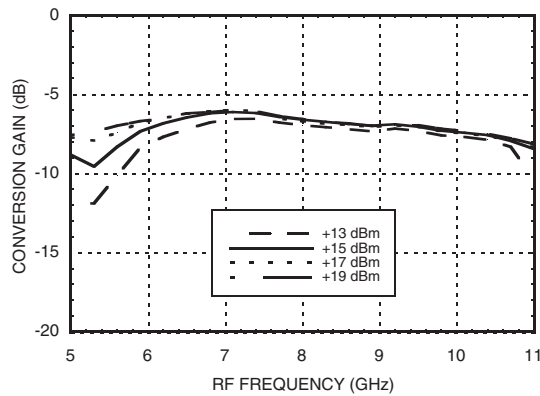


**Return Loss**

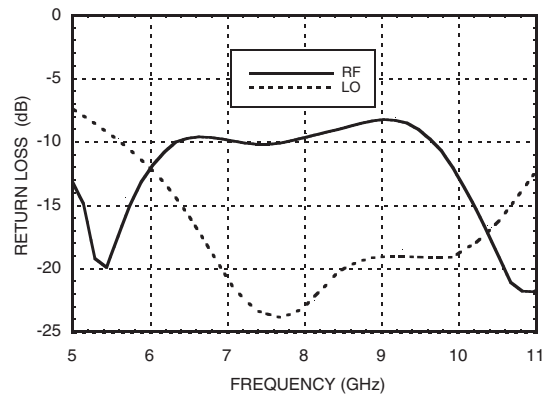

**Input P1dB vs. Temperature**

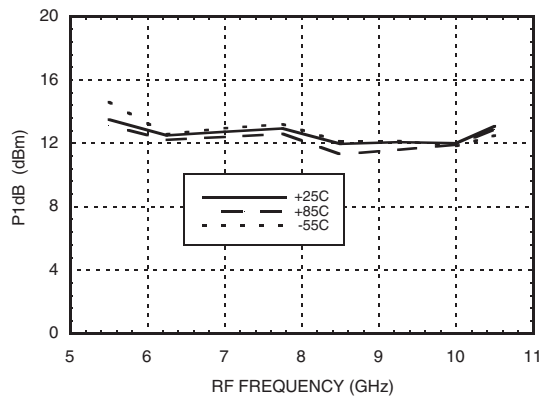

**Input IP3 vs. LO Drive**

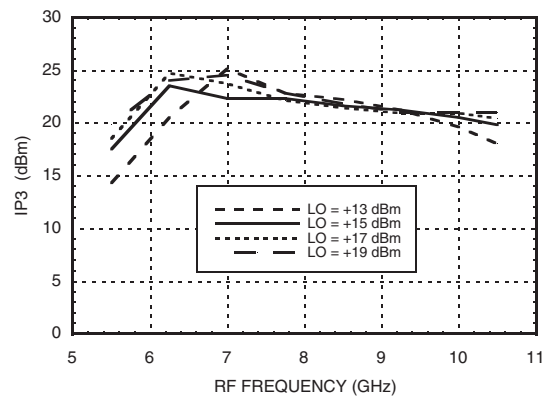


For price, delivery, and to place orders, please contact Hittite Microwave Corporation:  
20 Alpha Road, Chelmsford, MA 01824 Phone: 978-250-3343 Fax: 978-250-3373  
Order On-line at [www.hittite.com](http://www.hittite.com)




Quadrature Channel Data Taken Without IF Hybrid


Isolations

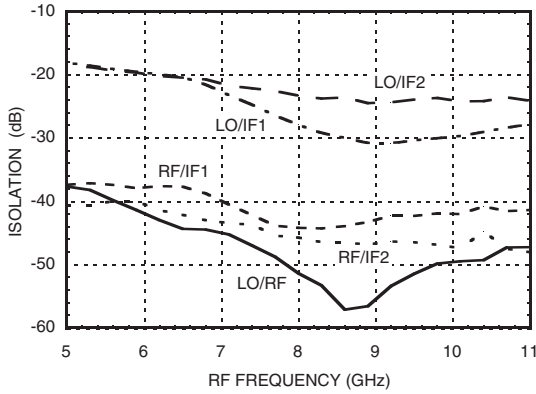


IF Bandwidth\*

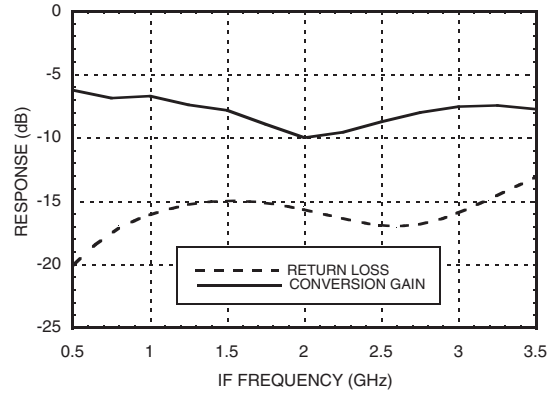


Amplitude Balance vs. LO Drive

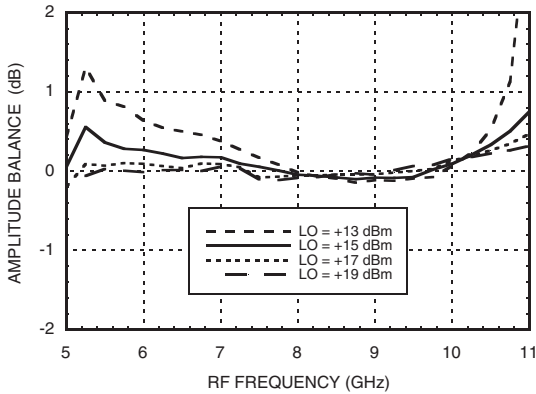


Phase Balance vs. LO Drive

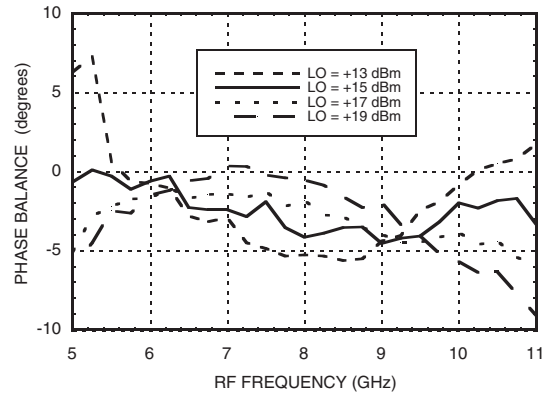

Upconverter Performance Conversion Gain vs. LO Drive

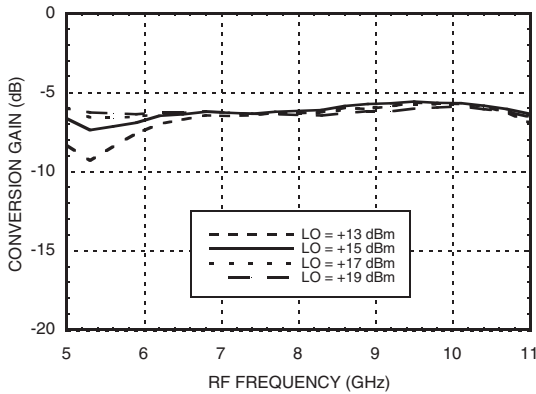

Upconverter Performance Sideband Rejection vs. LO Drive

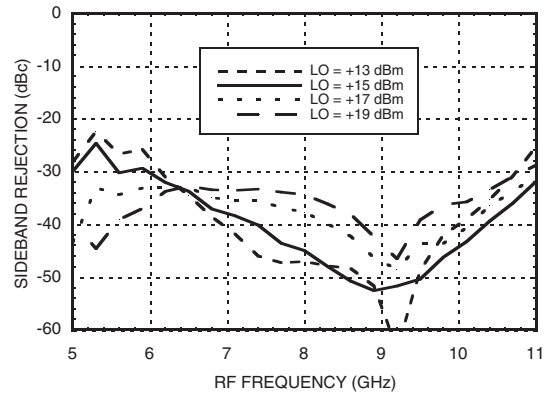

\* Conversion gain data taken with external IF hybrid

For price, delivery, and to place orders, please contact Hittite Microwave Corporation:  
20 Alpha Road, Chelmsford, MA 01824 Phone: 978-250-3343 Fax: 978-250-3373  
Order On-line at [www.hittite.com](http://www.hittite.com)



### Harmonics of LO

| LO Freq. (GHz) | nLO Spur at RF Port |    |    |    |
|----------------|---------------------|----|----|----|
|                | 1                   | 2  | 3  | 4  |
| 5.5            | 40                  | 41 | 51 | 54 |
| 6.5            | 44                  | 48 | 45 | 69 |
| 7.5            | 52                  | 62 | 55 | 68 |
| 8.5            | 52                  | 66 | 58 | 55 |
| 9.5            | 46                  | 59 | 69 | 47 |
| 10.5           | 47                  | 60 | 62 | xx |

LO = + 15 dBm  
Values in dBc below input LO level measured at RF Port.

### MxN Spurious Outputs

| mRF | nLO |    |    |    |    |
|-----|-----|----|----|----|----|
|     | 0   | 1  | 2  | 3  | 4  |
| 0   | xx  | -6 | 37 | 21 | 61 |
| 1   | 31  | 0  | 47 | 60 | 68 |
| 2   | 90  | 69 | 72 | 69 | 90 |
| 3   | 90  | 90 | 90 | 79 | 90 |
| 4   | 90  | 90 | 90 | 99 | 90 |

RF = 7.6 GHz @ -10 dBm  
LO = 7.5 GHz @ +15 dBm  
Data taken without IF hybrid  
All values in dBc below IF power level

### Absolute Maximum Ratings

|   |                |
|---|----------------|
| RF / IF Input   | +20 dBm        |
| LO Drive  | + 27 dBm       |
| Channel Temperature   | 150°C          |
| Continuous Pdiss (T=85°C)<br>(derate 6.9 mW/°C above 85°C)            | 508 mW         |
| Thermal Resistance (R <sub>TH</sub> )<br>(junction to package bottom) | 128.2 °C/W     |
| Storage Temperature   | -65 to +150 °C |
| Operating Temperature   | -55 to +85 °C  |




**ELECTROSTATIC SENSITIVE DEVICE  
OBSERVE HANDLING PRECAUTIONS**

**NOTES:**

1. PACKAGE BODY MATERIAL: ALUMINA
2. LEAD AND GROUND PADDLE PLATING: 30 - 80 MICROINCHES GOLD OVER 50 MICROINCHES MINIMUM NICKLE
3. DIMENSIONS ARE IN INCHES [MILLIMETERS]
4. LEAD SPACING TOLERANCE IS NON-CUMULATIVE
5. PACKAGE WARP SHALL NOT EXCEED 0.05mm DATUM
6. ALL GROUND LEADS AND GROUND PADDLE MUST BE SOLDERED TO PCB RF GROUND

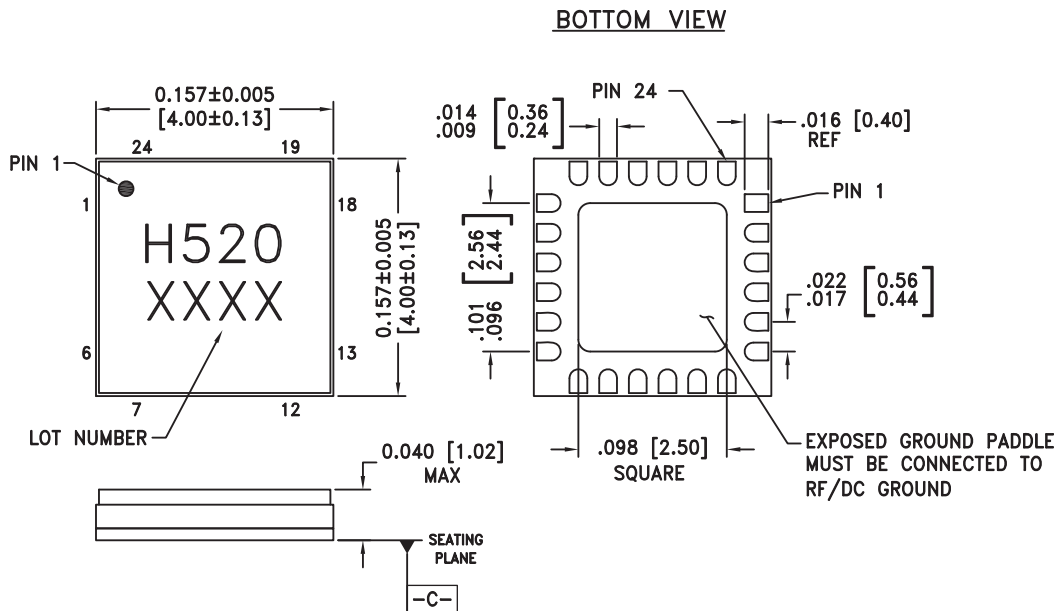



### Outline Drawing




For price, delivery, and to place orders, please contact Hittite Microwave Corporation:  
20 Alpha Road, Chelmsford, MA 01824 Phone: 978-250-3343 Fax: 978-250-3373  
Order On-line at [www.hittite.com](http://www.hittite.com)



### Pin Descriptions
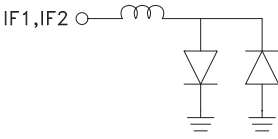
| Pin Number               | Function | Description  | Interface Schematic   |
|--------------------------|----------|--|---|
| 1, 2, 6-8, 10, 13, 17-24 | N/C      | No connection required. These pins may be connected to RF/DC ground without affecting performance.   |   |
| 3, 5, 12, 14, 16         | GND      | These pins and package bottom must be connected to RF/DC ground.   |  |
| 4                        | RF       | This pin is AC coupled and matched to 50 Ohms from 6 to 10 GHz.  |  |
| 9                        | IF1      | This pin is DC coupled. For applications not requiring operation to DC, this port should be DC blocked externally using a series capacitor whose value has been chosen to pass the necessary IF frequency range. For operation to DC, this pin must not source/sink more than 3mA of current or part non-function and possible part failure will result. |  |
| 11                       | IF2      |  |   |
| 15                       | LO       | This pin is AC coupled and matched to 50 Ohms from 6 to 10 GHz.  |  |

## Evaluation PCB

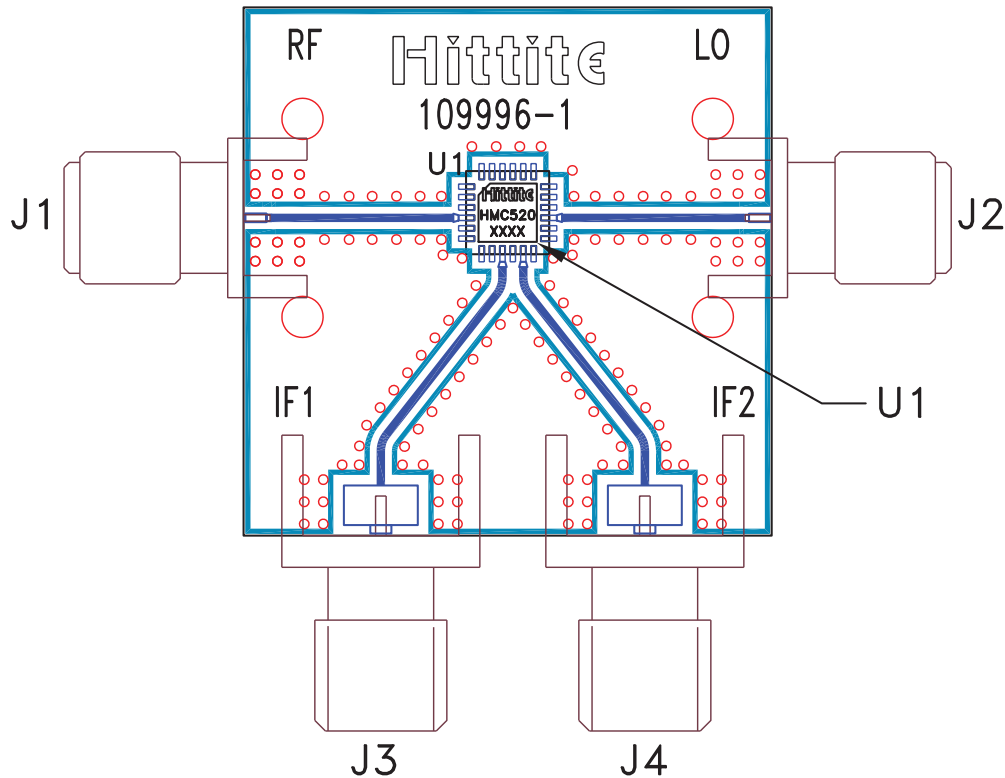

### List of Materials for Evaluation PCB 109998 [1]

| Item    | Description                      |
|---------|----------------------------------|
| J1 - J2 | PCB Mount SMA RF Connector, SRI  |
| J3 - J4 | PCB Mount SMA Connector, Johnson |
| U1      | HMC520LC4                        |
| PCB [2] | 109996 Evaluation Board          |

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

The circuit board used in the final application should use RF circuit design techniques. Signal lines should have 50 ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation circuit board shown is available from Hittite upon request.