

**TO-252**

**Pin Definition:**

1. Gate
2. Drain
3. Source

**PRODUCT SUMMARY**

$V_{DS}$ (V)	$R_{DS(on)}$ ( $\Omega$ )	$I_D$ (A)
500	0.8 @ $V_{GS} = 10V$	4

**Features**


- Low  $R_{DS(on)}$
- Low Gate Charge
- Unclamped Inductive Switching (UIS) Rated

**Application**

- Load Switch
- Ballast
- Lighting

**Ordering Information**

Part No.	Package	Packing
TSM5NS50CP RO	TO-252	T&R

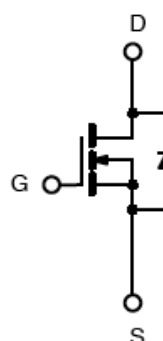**Block Diagram**


N-Channel MOSFET

**Absolute Maximum Rating ( $T_a = 25^\circ\text{C}$  unless otherwise noted)**

Parameter	Symbol	Limit	Unit
Drain-Source Voltage	$V_{DS}$	500	V
Gate-Source Voltage	$V_{GS}$	$\pm 20$	V
Continuous Drain Current	$I_D$	4.4	A
Pulsed Drain Current	$I_{DM}$	20	A
Repetitive Avalanche Current	$I_{AR}$	5	A
Energy Avalanche	EAS	150	mJ
Maximum Power Dissipation	$P_D$	70	W
Operating Junction Temperature	$T_J$	+150	$^\circ\text{C}$
Operating Junction and Storage Temperature Range	$T_J, T_{STG}$	-55 to +150	$^\circ\text{C}$

**Thermal Performance**

Parameter	Symbol	Limit	Unit
Thermal Resistance - Junction to Case	$R_{\theta JC}$	1.78	$^\circ\text{C/W}$
Thermal Resistance - Junction to Ambient	$R_{\theta JA}$	62	$^\circ\text{C/W}$

**Notes:**


- a. When mounted on 1 inch square 2oz copper clad FR-4

### Electrical Specifications


Parameter	Conditions	Symbol	Min	Typ	Max	Unit
<b>Static</b>						
Drain-Source Breakdown Voltage	$V_{GS} = 0V, I_D = 250\mu A$	$BV_{DSS}$	500	--	--	V
Gate Threshold Voltage	$V_{DS} = V_{GS}, I_D = 250\mu A$	$V_{GS(TH)}$	2	--	4	V
Gate Body Leakage	$V_{GS} = \pm 20V, V_{DS} = 0V$	$I_{GSS}$	--	--	$\pm 100$	nA
Zero Gate Voltage Drain Current	$V_{DS} = 500V, V_{GS} = 0V$	$I_{DSS}$	--	--	1.0	$\mu A$
Drain-Source On-State Resistance <sup>a</sup>	$V_{GS} = 10V, I_D = 4.0A$	$R_{DS(ON)}$	--	0.7	0.8	$\Omega$
Diode Forward Voltage	$I_S = 4.4A, V_{GS} = 0V$	$V_{SD}$	--	1.0	1.5	V
<b>Dynamic <sup>b</sup></b>						
Total Gate Charge	$V_{DS} = 520V, I_D = 4.4A, V_{GS} = 10V$	$Q_g$	--	13	--	nC
Gate-Source Charge		$Q_{gs}$	--	3	--	
Gate-Drain Charge		$Q_{gd}$	--	6	--	
Input Capacitance	$V_{DS} = 25V, V_{GS} = 0V, f = 1.0MHz$	$C_{iss}$	--	400	--	pF
Output Capacitance		$C_{oss}$	--	120	--	
Reverse Transfer Capacitance		$C_{rss}$	--	40	--	
<b>Switching <sup>c</sup></b>						
Turn-On Delay Time	$V_{GS} = 10V, I_D = 4.4A, V_{DS} = 350V, R_G = 25\Omega$	$t_{d(on)}$	--	6	--	nS
Turn-On Rise Time		$t_r$	--	3	--	
Turn-Off Delay Time		$t_{d(off)}$	--	50	--	
Turn-Off Fall Time		$t_f$	--	10	--	
Source-to-Drain Reverse Recovery Time	$I_S = 4.4A, di/dt = 100A/\mu S$	$t_r$	--	250	00	nS

**Notes:**

- a. Pulse test: pulse width  $\leq 300\mu S$ , duty cycle  $\leq 2\%$
- b. For design reference only, not subject to production testing.
- c. Switching time is essentially independent of operating temperature.

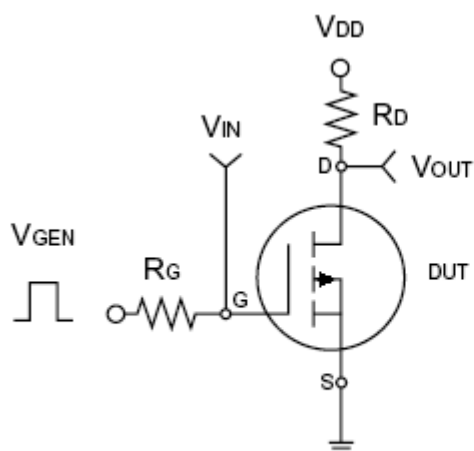


**Switching Test Circuit**

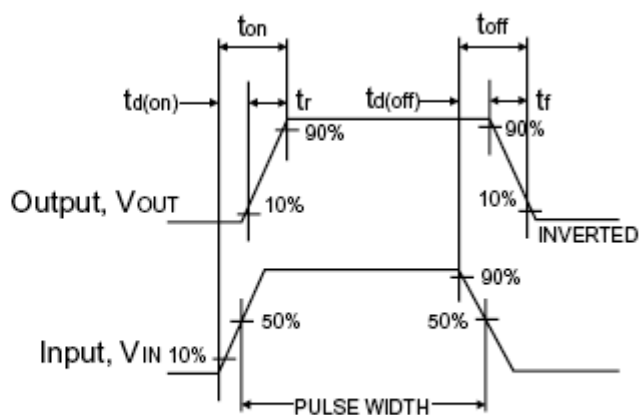


**Switchin Waveforms**

**Electrical Characteristics Curve** ( $T_a = 25^\circ\text{C}$ , unless otherwise noted)


**Output Characteristics**

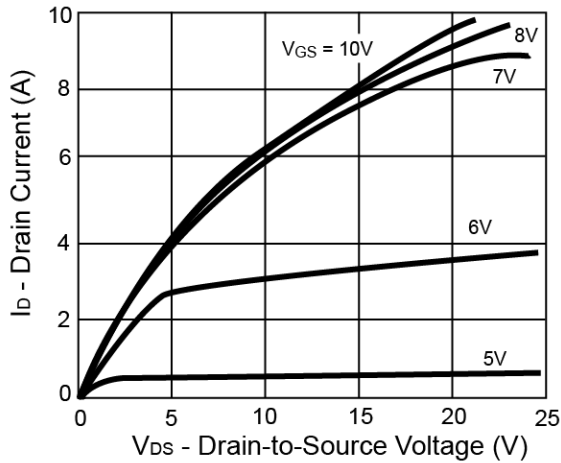


**Transfer Characteristics**

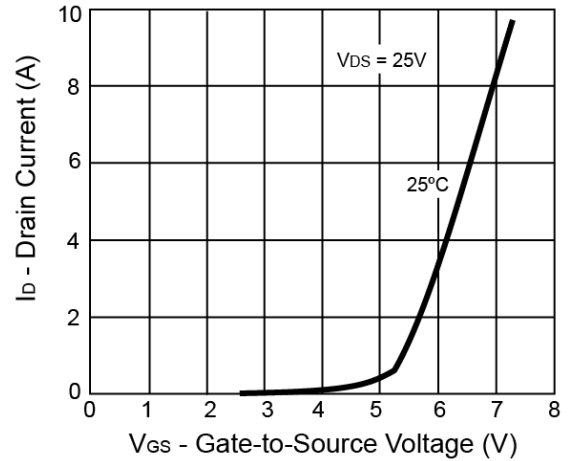


**On-Resistance vs. Drain Current**

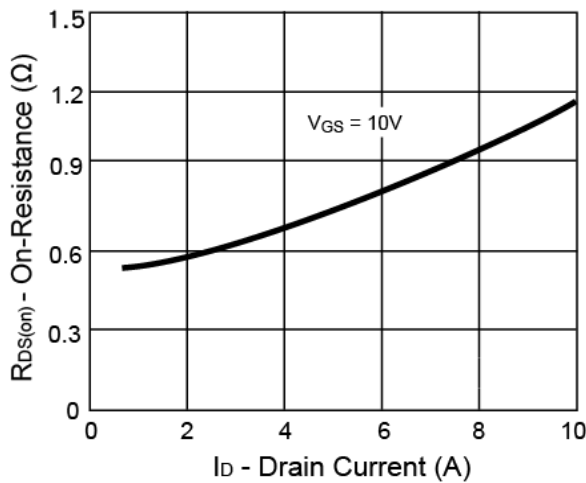


**Gate Charge**

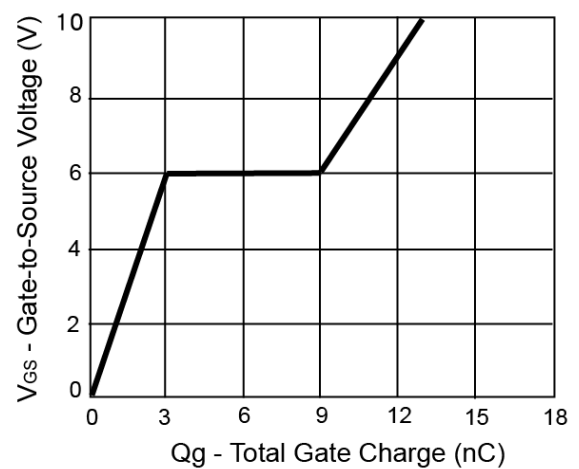

**On-Resistance vs. Junction Temperature**

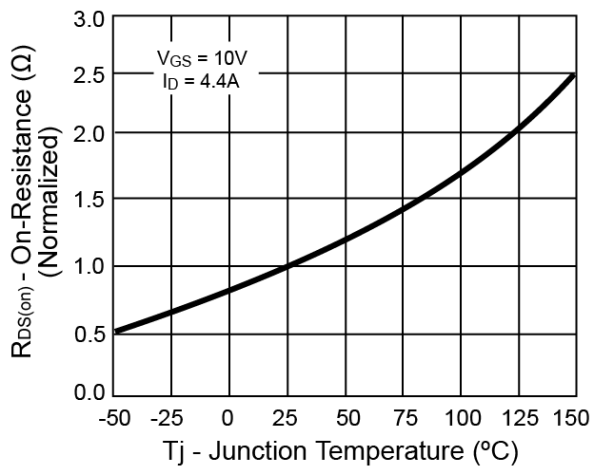


**Source-Drain Diode Forward Voltage**

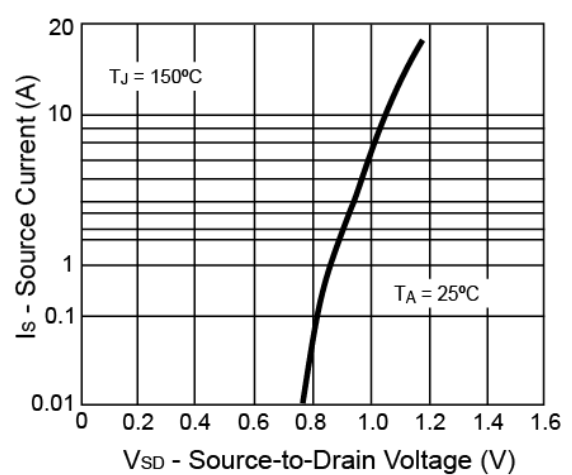


**Electrical Characteristics Curve** (Ta = 25 °C, unless otherwise noted)


**On-Resistance vs. Gate-Source Voltage**

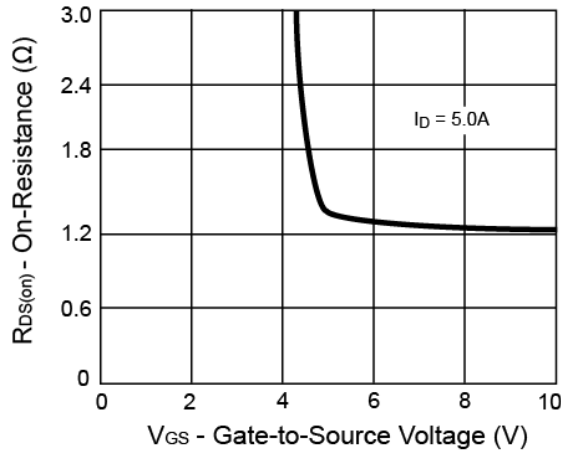


**Threshold Voltage**

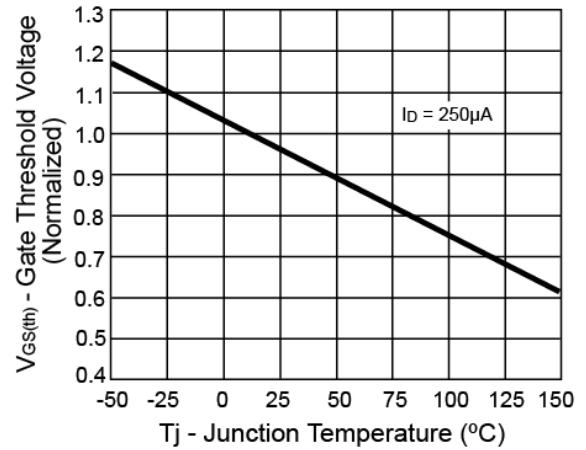


**Maximum Safe Operating Area**

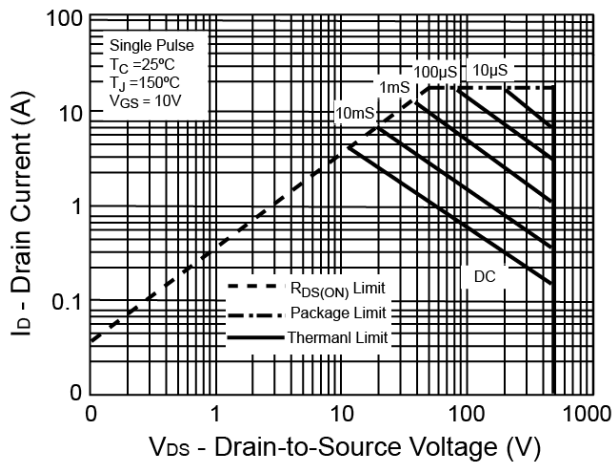

**Normalized Thermal Transient Impedance, Junction-to-Ambient**

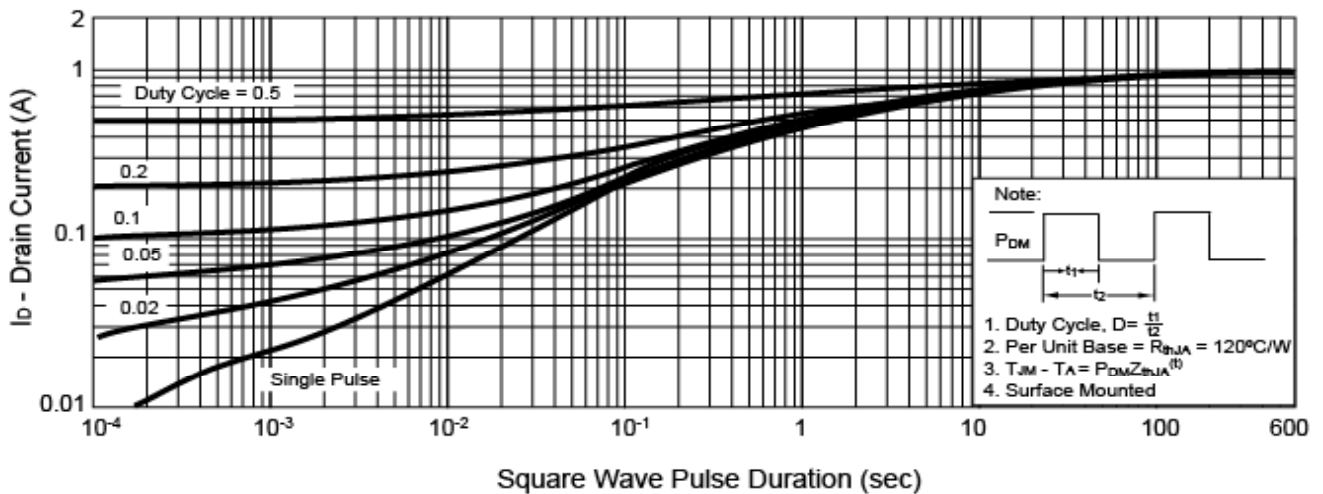

**SOT-252 Mechanical Drawing**

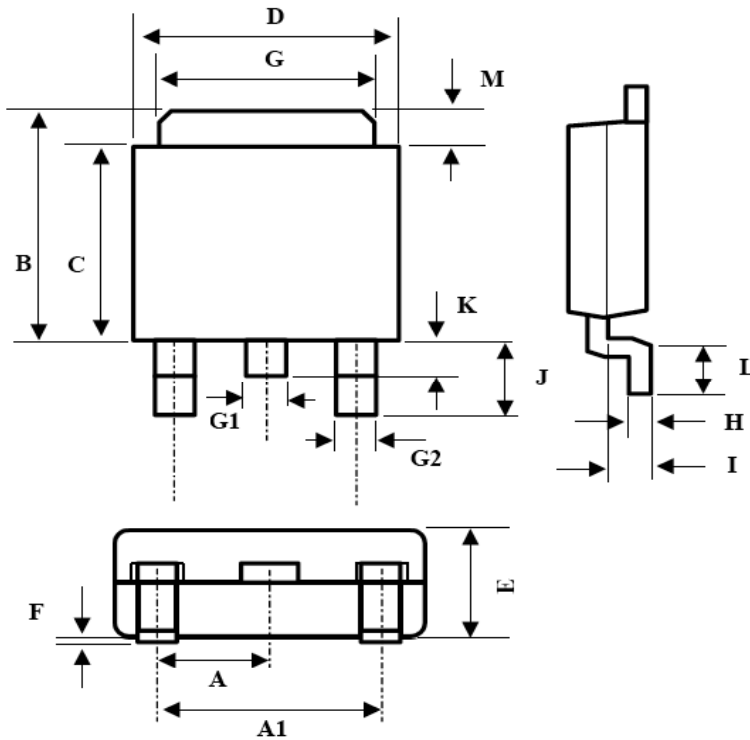

DIM	TO-252 DIMENSION			
	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	2.3BSC		0.09BSC	
A1	4.6BSC		0.18BSC	
B	6.80	7.20	0.268	0.283
C	5.40	5.60	0.213	0.220
D	6.40	6.65	0.252	0.262
E	2.20	2.40	0.087	0.094
F	0.00	0.20	0.000	0.008
G	5.20	5.40	0.205	0.213
G1	0.75	0.85	0.030	0.033
G2	0.55	0.65	0.022	0.026
H	0.35	0.65	0.014	0.026
I	0.90	1.50	0.035	0.059
J	2.20	2.80	0.087	0.110
K	0.50	1.10	0.020	0.043
L	0.90	1.50	0.035	0.059
M	1.30	1.70	0.051	0.67

### Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.