

Thin flat package
MSCD102SH THRU MSCD106SH
● FEATURES

- * Halogen-free type
- * Lead free product , compliance to RoHs
- * Lead less chip form , no lead damage
- * Lead-free solder joint , no wire bond & lead frame
- * Low power loss , High efficiency
- * High current capability , low VF
- * Plastic package has Underwriters Laboratory Flammability Classification 94V-0

● APPLICATION

- * Switching mode power supply applications
- * Portable equipment battery applications
- * High frequency rectification
- * DC / DC Converter
- * Telecommunication

● MECHANICAL DATA

Case : Packed with FRP substrate and epoxy underfilled



Terminals : Pure Tin plated (Lead-Free), solderable per MIL-STD-750, Method 2026.

Polarity : Laser Cathode band marking

Weight : 0.004 gram

● PACKING

- * 3,000 pieces per 7" (178mm ± 2mm) reel
- * 5 reels per box
- * 6 boxes per carton

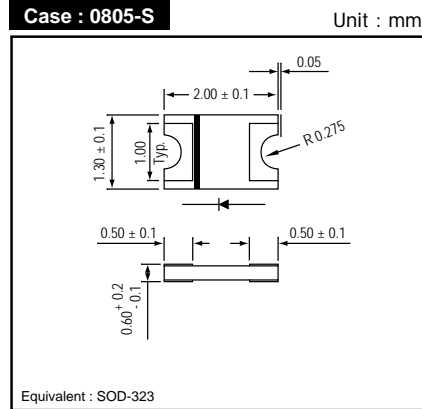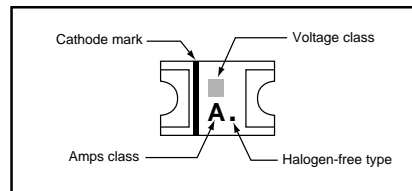● OUTLINE DIMENSIONS

● MARKING

Absolute Maximum Ratings (Ta = 25 °C)

ITEM	Symbol	Conditions	Rating			Unit
			MSCD102SH	MSCD104SH	MSCD106SH	
Repetitive peak reverse voltage	VRRM		20	40	60	V
Average forward current	IF(AV)		1.0			A
Peak forward surge current	IFSM	8.3ms single half sine-wave	10			A
Operating junction temperature Range	Tj		-55 to +125		-55 to +150	°C
Storage temperature Range	TSTG		- 55 to +150			°C

Electrical characteristics (Ta = 25 °C)

ITEM	Symbol	Conditions	Type	Min.	Typ.	Max.	Unit
Forward voltage (NOTE 1)	VF	IF = 0.1 A	MSCD102SH	-	0.32	-	V
		IF = 0.5 A		-	0.39	-	
		IF = 1.0 A		-	0.42	0.45	
		IF = 0.1 A	MSCD104SH	-	0.33	-	
		IF = 0.5 A		-	0.40	-	
		IF = 1.0 A		-	0.47	0.50	
IF = 0.1 A	MSCD106SH	-	0.38	-			
IF = 0.5 A		-	0.50	-			
IF = 1.0 A		-	0.62	0.65			
Repetitive peak reverse current (NOTE 1)	IRRM	VR = Max. VRRM , Ta = 25 °C		-	0.028	0.20	mA
Junction capacitance	Cj	VR = 4V, f = 1.0 MHz		-	115	-	pF
Thermal resistance	Rth(JA)	Junction to ambient		-	120	-	°C/W
	Rth(JL)	Junction to lead		-	28	-	°C/W

NOTES : (1) Pulse test width PW=300usec , 1% duty cycle.

(2) Mounted on P.C. board with 0.2 x 0.2"(5.0 x5.0mm) copper pad areas.

FIG.1 - FORWARD CURRENT DERATING CURVE

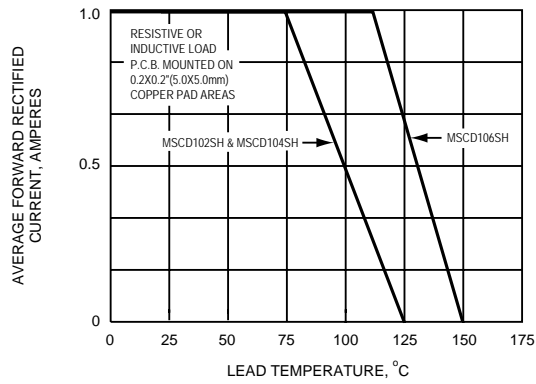


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

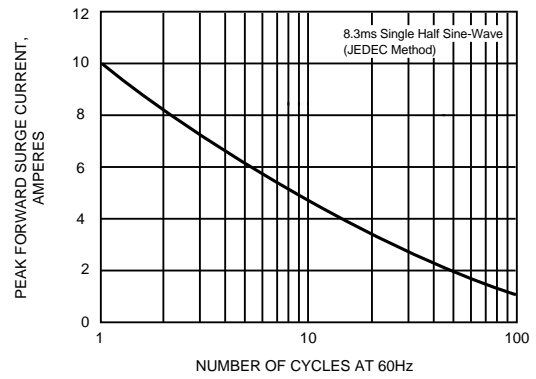


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

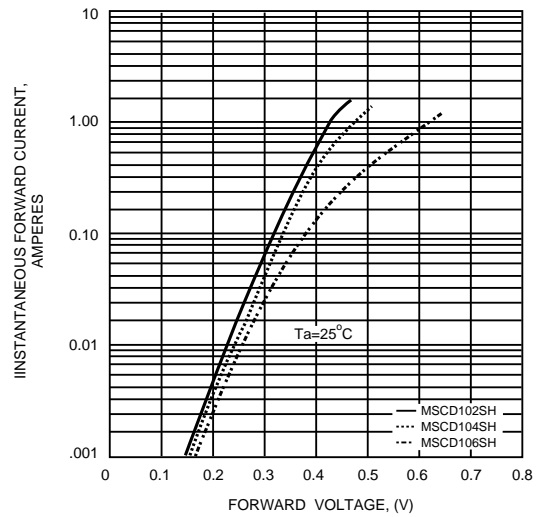


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

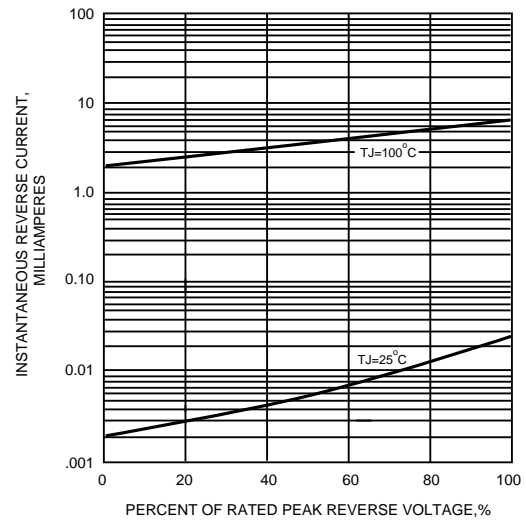


FIG.5 - TYPICAL JUNCTION CAPACITANCE

