

Touch Screen Display VOA Switch Tray VSD


VOA Touch Screen Display VSD

Polatis introduces the powerful new touch screen line of OPM/VOA Optical Switch Tray (VSD) products with built-in optical power monitoring and VOA capabilities.

The VSD product enables stand-alone front panel operation of all major switching functions, without the need for network connectivity or external devices. Operated through an intuitive page-driven graphical user interface, the front panel allows setting and viewing port connections, recalling stored switch connection patterns, setting the switch IP address, viewing port optical powers, and setting attenuation levels.

The VSD product provides remote and local operation, and is ideal for both network and test environments. In production and system test environments, the VSD delivers automated, high quality test capabilities. In networks, the VSD permits central office operators the ability to locally access fiber connections for service provisioning and restoration, and interrogate or attenuate optical power on individual links.

Like all Polatis products, the VSD offers the highest performance and reliability, with ultra-low insertion loss and

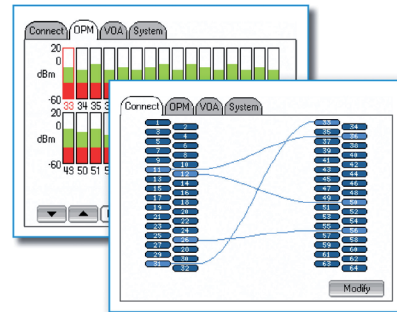

minimal optical impairments. The full range of Polatis' high performance single-mode optical switch matrices are available in the VSD platform.

DirectLight® Technology

The VSD products are based on the patented DirectLight beam-steering technology, setting the benchmark for reliable, high performance optical switching.

KEY FEATURES

- Touch screen control
- Easy to use GUI
- Remote or stand-alone control
- Optical power monitoring
- Optical attenuation (VOA) control
- Ultra-low insertion loss
- High repeatability
- USB, RS232, Ethernet, GPIB interface options
- Easy visual inspection of switch state
- Dark fiber switching
- Handles high optical power

APPLICATIONS

- Production test automation
- Systems verification testing
- Interoperability testing
- Secure communications networks
- Centralized network monitoring
- PON/FTTx test and switching
- Service provisioning and restoration
- Pro-AV
- RF over fiber
- High power laser switching

High performance optical switch solutions

PERFORMANCE SPECIFICATIONS

| FIBER COUNT DESIGNATOR | I | | K | |
|---|---|--|---|--|
| | -100, -300, -400 Output Monitor or Absolute VOA | -200, -500 Input & Output Monitor or Relative VOA | -100, -300, -400 Output Monitor or Absolute VOA | -200, -500 Input & Output Monitor or Relative VOA |
| Insertion Loss @ 1550nm ¹ | <1.2dB | <1.3dB | <1.6dB | <1.7dB |
| Polarization Dependent Loss @ 0 dB attenuation | <0.1dB | <0.1dB | <0.15dB | <0.15dB |
| Crosstalk | <-70dB | | <-60dB | |
| Operating Wavelength Range ⁵ | 1260-1625nm | | | |
| Wavelength Dependent Loss | <0.3dB (C+L Band) | | | |
| Repeatability ⁶ | <±0.05dB | | | |
| Return Loss ² | >55dB | | | |
| Switching Time | <17ms | | | |
| Maximum Optical Power ³ | +24dBm | | | |
| Switch Lifetime | 10 ⁹ cycles | | | |
| Operating Temp (Normal) | +10° to +40°C, <85% RH non-condensing | | | |
| Operating Temp (Extended) | -5° to +55°C, <85% RH non-condensing ⁹ | | | |
| Storage Temp (Normal) ¹⁰ | -30° to +70°C, <40% RH non-condensing ⁹ | | | |
| Storage Temp (Extended) ¹⁰ | -30° to +70°C, <40% RH non-condensing ⁹ | | | |
| Qualification (Normal) | Designed to meet EN60950 | | | |
| Qualification (Extended) | Designed to meet Telcordia GR63 EN60950 | | | |
| VOA Performance | | | | |
| Optical Attenuation Range ⁷ | >40dB | | | |
| VOA Resolution | < 0.25dB | | | |
| Output Stability @ 0dB ⁸ | < ± 0.05dB | | | |
| OPM Performance | | | | |
| Operating Wavelength Range ⁵ | 1290-1330nm + 1450-1625nm | | | |
| OPM Dynamic Range ⁴ | -30 to +24dBm | | | |
| OPM Accuracy | < ± 0.5dBm | | | |

All parameters are measured excluding connectors at 1550nm and 20°C with an unpolarized source after thermal equalization unless stated.

- Measured using a 3 patch-cord method as defined in TIA/EIA-526-14A.
- With APC connectors return loss >70dB without connectors.
- Switch will operate on dark fiber.
- Dynamic range for extended temperature is -20 to +24dBm.
- Calibrated range for optical power monitors; switch operable over 1260-1625nm.
- At zero attenuation.
- When output power is within OPM dynamic range.
- For stability at various levels of attenuation please contact Polatis for further details.
- Maximum absolute humidity equivalent to 85% at 40C.
- Long term storage within +10C to +35C, <40% RH to preserve display performance. Partially populated VOA & OPM options also available. Call for details.

The performance characteristics of the switch trays vary according to the fiber count.

| Fiber Count | 04 | 08 | 12 | 16 | 20 | 24 | 28 | 32 | CC |
|-------------|----|----|----|----|----|----|----|----|----|
| 04 | I | I | I | I | K | K | K | K | - |
| 08 | I | I | I | I | K | K | K | K | K |
| 12 | I | I | I | I | K | K | K | K | K |
| 16 | I | I | I | I | K | K | K | K | K |
| 20 | K | K | K | K | K | K | K | K | K |
| 24 | K | K | K | K | K | K | K | K | K |
| 28 | K | K | K | K | K | K | K | K | K |
| 32 | K | K | K | K | K | K | K | K | K |

PROD-421-01-0-S APR 2008

Copyright © 2008 Polatis Inc. All rights reserved. All information in this document is provided for informational purposes only and is subject to change without notice. Polatis Inc. assumes no liability for actions taken based on information contained herein.

Packaging Information

| Fiber Count | Tray Dimensions | Power Dissipation |
|-------------|-----------------------------------|-------------------|
| 4-32 | 19" rack mount, 3 rack units high | 25 W |
| 33-64 | | 45 W |

Ordering Information

The part numbering scheme for Polatis products is as follows:

VSD - x - 1 - - - - -

| | |
|-----------------------|---|
| Fibers | 4-32 Input 8-32 Reconfigurable |
| Fibers | 4-32 Output CC = Reconfigurable |
| Connector | L = LC F = FC C = SC T = ST U = MU |
| Polish | U = UPC A = APC |
| Fiber | 1 = Single mode 9/125µm |
| Interface | E = Ethernet, RS232 & USB M = Ethernet (Multisession), RS232 & USB G = GPIB, Ethernet, RS232 & USB |
| Protocol | S = SCPI T = TL1 N = SNMP |
| Power | B = Battery (dual -48V) Mains connector type A = North America/Japan E = Continental Europe U = UK C = China/Australia |
| Environmental | N = Normal E = Extended |
| Customization | S = Standard Y = Non-standard variant |
| Switch Configuration* | -100 = Output power monitors with absolute VOA -200 = Input & output power monitors with relative VOA -300 = Output power monitors -400 = Input power monitors -500 = Input & output power monitors |

* Reconfigurable only have options 100, 300 & 400.

FOR MORE INFORMATION

Visit our website: www.jdsu.com

E-mail us: sales@jdsu.com

Phone us:

North American Sales: 1 866 228 3762

Latin American Sales: +55 11 5503 3800

Asia Pacific Sales: +852 2892 0990

EMEA Sales: +49 7121 86 2222

