

**Cascadable Amplifier
10 to 2000 MHz**

A39/ SMA39

V3

Features

- HIGH OUTPUT POWER: +22 dBm (TYP.)
- HIGH THIRD ORDER I.P.: +34 dBm (TYP.)
- WIDE BANDWIDTH: 10-2000 MHz

Description


The A39 RF amplifier is a discrete thin film hybrid design, which incorporates the use of thin film manufacturing processes for accurate performance and high reliability. This single stage bipolar transistor feedback amplifier design displays impressive performance over a broadband frequency range. An active DC biasing network is used for temperature-stable performance, in addition to an RF Choke, used for power supply decoupling. Both TO-8 and Surface Mount packages are hermetically sealed, and MIL-STD-883 environmental screening is available.

Ordering Information

| Part Number | Package |
|-------------|-------------------|
| A39 | TO-8 |
| SMA39 | Surface Mount |
| CA39 ** | SMA Connectorized |

** The connectorized version is not RoHs compliant.

Product Image

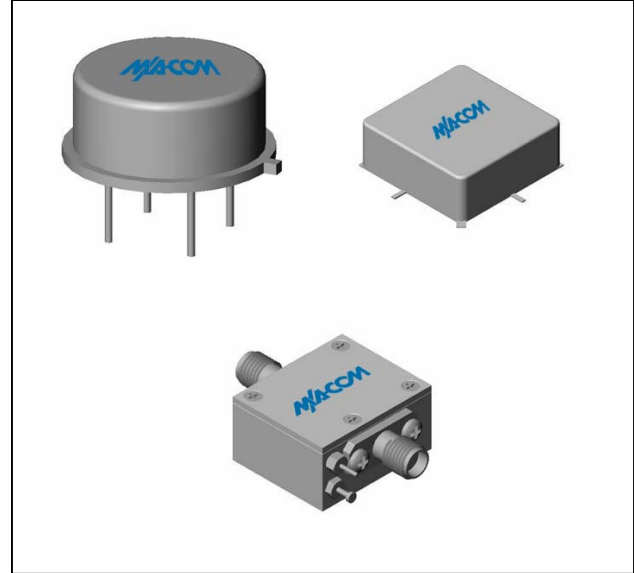

Electrical Specifications: $Z_0 = 50\Omega$, $V_{CC} = +15 V_{DC}$

| Parameter | Units | Typical | Guaranteed | |
|---------------------------------|-------|---------------|---------------|----------------|
| | | 25°C | 0° to 50°C | -54° to +85°C* |
| Frequency | MHz | 5-2050 | 10-2000 | 10-2000 |
| Small Signal Gain (min) | dB | 7.5 | 6.5 | 6.0 |
| Gain Flatness (max) | dB | ±0.3 | ±0.7 | ±1.0 |
| Reverse Isolation | dB | 14 | | |
| Noise Figure (max) | dB | 8.5 | 9.5 | 10.0 |
| Power Output @ 1 dB comp. (min) | dBm | 22.0 | 20.0 | 19.5 |
| IP3 | dBm | +34 | | |
| IP2 | dBm | +50 | | |
| Second Order Harmonic IP | dBm | +55 | | |
| VSWR Input / Output (max) | | 1.6:1 / 1.6:1 | 2.2:1 / 2.2:1 | 2.3:1 / 2.3:1 |
| DC Current @ 15 Volts (max) | mA | 90 | 94 | 98 |

Absolute Maximum Ratings

| Parameter | Absolute Maximum |
|--|------------------|
| Storage Temperature | -62°C to +125°C |
| Case Temperature | 125°C |
| DC Voltage | +17 V |
| Continuous Input Power | +50 dBm |
| Short Term Input power (1 minute max.) | 100 mW |
| Peak Power (3 µsec max.) | 0.5 W |
| "S" Series Burn-In Temperature (case) | 125°C |

Thermal Data: $V_{CC} = +15 V_{DC}$

| Parameter | Rating |
|---|---------|
| Thermal Resistance θ_{jc} | 100°C/W |
| Transistor Power Dissipation P_d | 0.935 W |
| Junction Temperature Rise Above Case T_{jc} | 93°C |

* Over temperature performance limits for part number CA39, guaranteed from 0°C to +50°C only.

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit www.macom.com for additional data sheets and product information.

