


PART NUMBER	ENGINEERING NO.	LENGTH
1300060156	102002A01F030	3' +1.75 - 0 [0.9M +44.5 - 0]
1300060159	102002A01F060	6' +2.19 - 0 [1.8M +55.6 - 0]
1300060162	102002A01F120	12' +3.50 - 0 [3.7M +88.9 - 0]
1300060168	102002A01F200	20' +6.50 - 0 [6.1M +165.1 - 0]


- NOTES:
1. MATERIAL: SEE TABLE
 2. FINISHES: SEE TABLE
 3. CABLE ASSEMBLIES ARE BAGGED SEPARATELY IN POLY BAGS WITH BARCODE LABEL ATTACHED TO OUTSIDE OF BAG
 4. WRAP LABEL IS MARKED WITH P/N, DATE CODE VOLTAGE & AMPERAGE
 5. MATES WITH: MINI CHANGE, A-SIZE 2 POLE RECEPTACLE
 6. ELECTRICAL SPECIFICATIONS:
VOLTAGE RATING: 600V
CURRENT RATING: 13 AMPS
 7. ASSEMBLY IS RoHS COMPLIANT




WIRING DIAGRAM

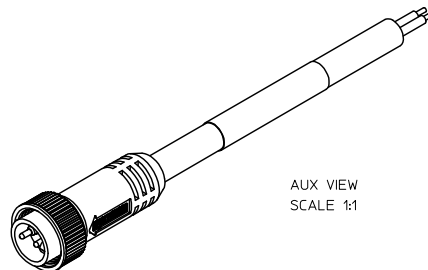

AUX VIEW
SCALE 1:1

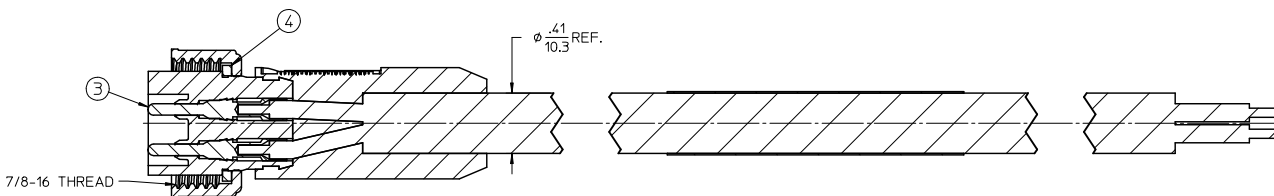

Section Z-Z

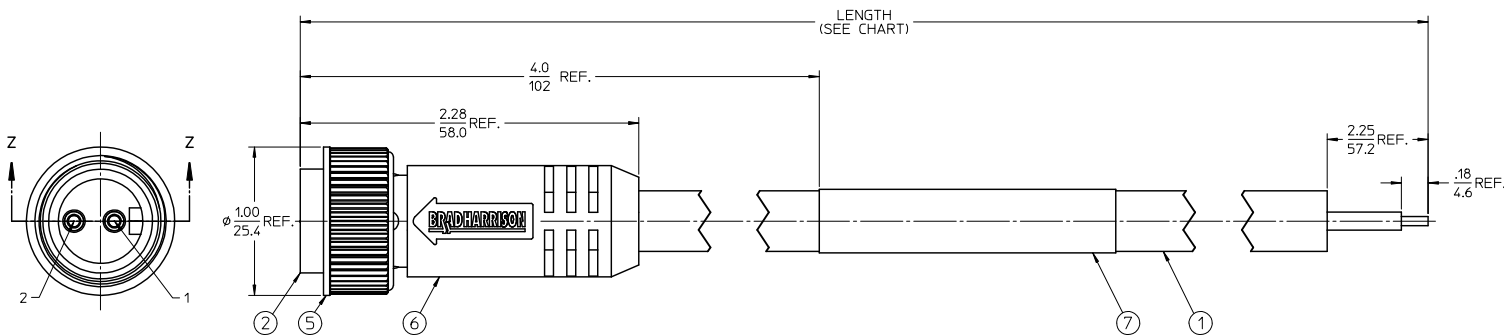

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
7	1	LABEL	PLASTIC FILM	BLACK/YELLOW
6	1	OVERMOLD, STRAIGHT	PVC	YELLOW
5	1	COUPLING NUT, FEMALE	ZINC DIE CAST	BLACK
4	1	FRICTION RING	NYLON	WHITE
3	2	CONTACT PIN, 16 AWG	BRASS	GOLD PLATED
2	1	INSERT, MALE, 2 POLE	PVC	YELLOW
1	1	CABLE, ST00W/ST #16/2	PVC JACKET	GRAY

PURCHASING DRAWING EC NO. IVA2009-0810 DRW: L.HARTMANN 2009/06/05 CHK: R.STONE APPR: J.MURPHY 2009/08/17	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	$\nabla=0$ $\nabla=0$	4 PLACES ±--- ±--- 3 PLACES ±--- ±.005 2 PLACES ±--- ±.010 1 PLACE ±--- ±.020 ANGULAR ±1/2°	IN/MM INCH	2:1	INCH	
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SEE CHART	DRAWN BY: L.HARTMANN DATE: 2009/06/05 CHECKED BY: R.STONE DATE: 2009/06/08 APPROVED BY: J.MURPHY DATE: 2009/06/08	TITLE: MINI-CHANGE PORTABLE 2 POLE MALE STRAIGHT #16/2 YELLOW ST00W/ST	MOLEX INCORPORATED	
			MATERIAL NO. SD-130006-002	DOCUMENT NO.	SHEET NO. 1 OF 1	