





TITLE	TRANSFORMER, POWER	PN	22523	REV	E
AGENCY APPROVAL: NA			SH	2	OF 9

SPECIFICATIONS:

- TEMP. CLASS: 105° C.
- INDUCTANCE: @ 10 KHZ, 0.1 V
(1-3) = 225 μHy MIN.
- LEAKAGE INDUCTANCE: @ 100 KHZ, 1 VOLT
WITH (4-6) SHORTED
(1-3) = 0.7 μHy MAX.
- INTERWINDING CAPACITANCE: @ 100 KHz
(1-3) TO (4-6) = 2.0 pF MAX. WITH SHIELD GROUNDED.
- TURNS RATIO: (1-3):(4-6) = 1:1.22 ± 2 %
- DCR: (1-3), (4-6) = 0.1 • NOM.
- THIS TRANSFORMER IS DESIGNED TO OPERATE WITH CRYSTAL SEMICONDUCTOR CS8401.8402, 8411, & 8412
- HIPOT 1500 VAC

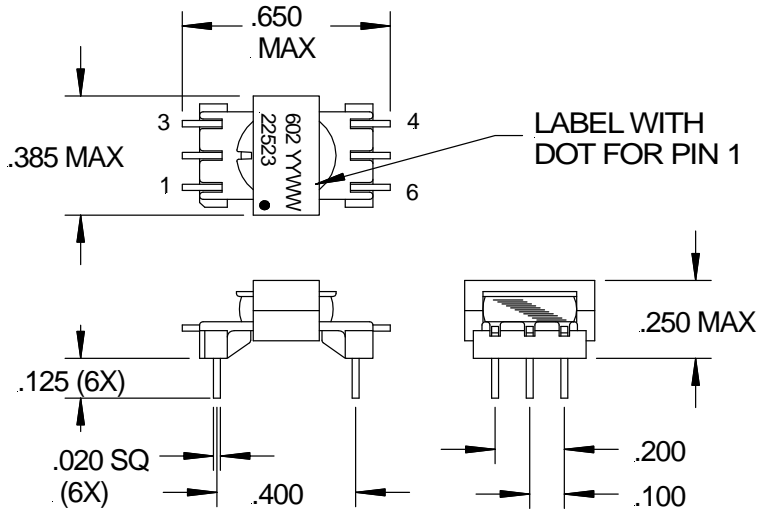

1000 Parkers Lake Road, Wayzata, MN 55391, (952) 475-1173, www.schottcorp.com

TOLERANCES UNLESS OTHERWISE SPECIFIED	INCHES / DECIMAL	.XX = ± .01	.XXX = ± .005	ANGLES ± 1°
	MILLIMETERS (mm)	.XX = ± 0.20		