



This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI. No part of the information shown on this document may be used in any way or disclosed to others without the written consent of FCI. Copyright FCI.

PRODUCT NUMBER
20020107-XXX1A01LF

20020107- □ □ □ 1 A 0 1 L F

PITCH
C: 3.50 mm
D: 3.81 mm
G: 5.00 mm
H: 5.08 mm

POLES
02: 2 POLES
03: 3 POLES
04: 4 POLES
24: 24 POLES

LF: DENOTED RoHS COMPATIBLE

PROPERTY TABLE				
FCI SERIES NAME	06-350	06-381	06-500	06-508
PITCH (mm)	3.50	3.81	5.00	5.08
VOLTAGE RATING (VAC)	300	300	300	300
CURRENT RATING (A)	10	10	12	12
WITHSTANDING VOLTAGE (kV)	1.6	1.6	1.6	1.6
OPERATING TEMP. (°C)	-40~+115	-40~+115	-40~+115	-40~+115
SOLDERING TEMP. (°C)	250±10 (5 sec.)	250±10 (5 sec.)	250±10 (5 sec.)	250±10 (5 sec.)
POLES AVAILABLE	02~24	02~24	02~24	02~24
SAFETY CERTIFICATE				


- NOTES:**
- MATERIALS**
1-1 HOUSING: THERMALPLASTIC RESIN, UL 94V-0 RATED, COLOR GREEN.
1-2 TERMINAL: COPPER, TIN PLATED.
 - PRODUCT SPECIFICATION REFER TO FCI GS-12-625.
 - BOXED PACKAGING,
DETAILED PRODUCT PACKING SPECIFICATION REFER TO FCI GS-14-1394.
 - FCI SAFETY CERTIFICATE LOGO AND SERIES NAME TO BE SHOWN ON PRODUCT SURFACE.
 - THE PRODUCTS WHERE THE PART NUMBER END IN "LF" MEET THE EUROPEAN UNION DIRECTIVE AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
 - RECOMMENDED SOLDERING PROCESS BY WAVE SOLDER.

TOLERANCES UNLESS OTHERWISE SPECIFIED				rev	ecn no	dr	date
LINEAR	X	±0.5	-	A	0609-0203	BF	062509
	XX	±0.30	-	B	T09-1148	BF	111709
	XXX	±0.10	-	C	T09-1152	BF	112609
ANGULAR	X'	±1'	-	D	T10-0042	VL	030310

Material		Spec ref *	
Mat code		tolerance	projection
Heattreat		✓	MM
Plating/Finish			⊕
Dr	BEER FU 062509	size	A4
Eng	BEER FU 062509	Scale	
Chr	GARY HSIEH 062509	Product family	
Appr	JOSEPH HSIA 062509	Model Name	ECN T10-0042
		Model Revision	REL Level RELEASED
	title	chg no	Rev.
	TERMINAL BLOCK	20020107	D
Pro/E file	catalog no	CUSTOMER	sheet 1 of 5
	Pluggable socket, straight		




This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI. No part of the information shown on this document may be used in any way or disclosed to others without the written consent of FCI. Copyright FCI.

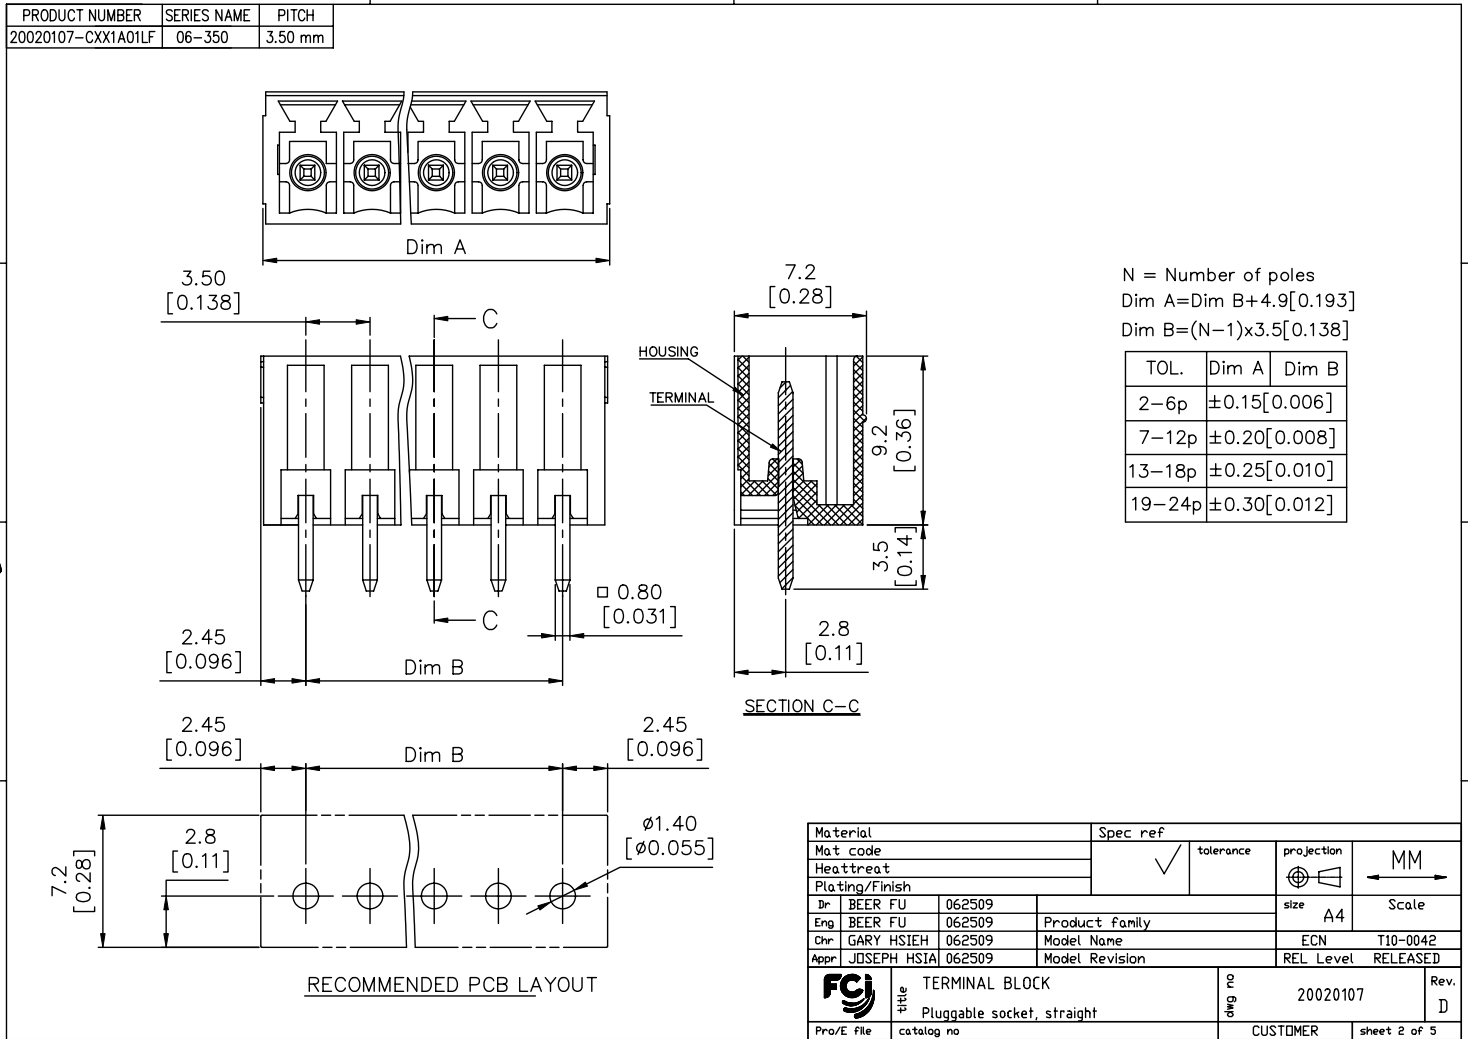





This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI. No part of the information shown on this document may be used in any way or disclosed to others without the written consent of FCI. Copyright FCI.

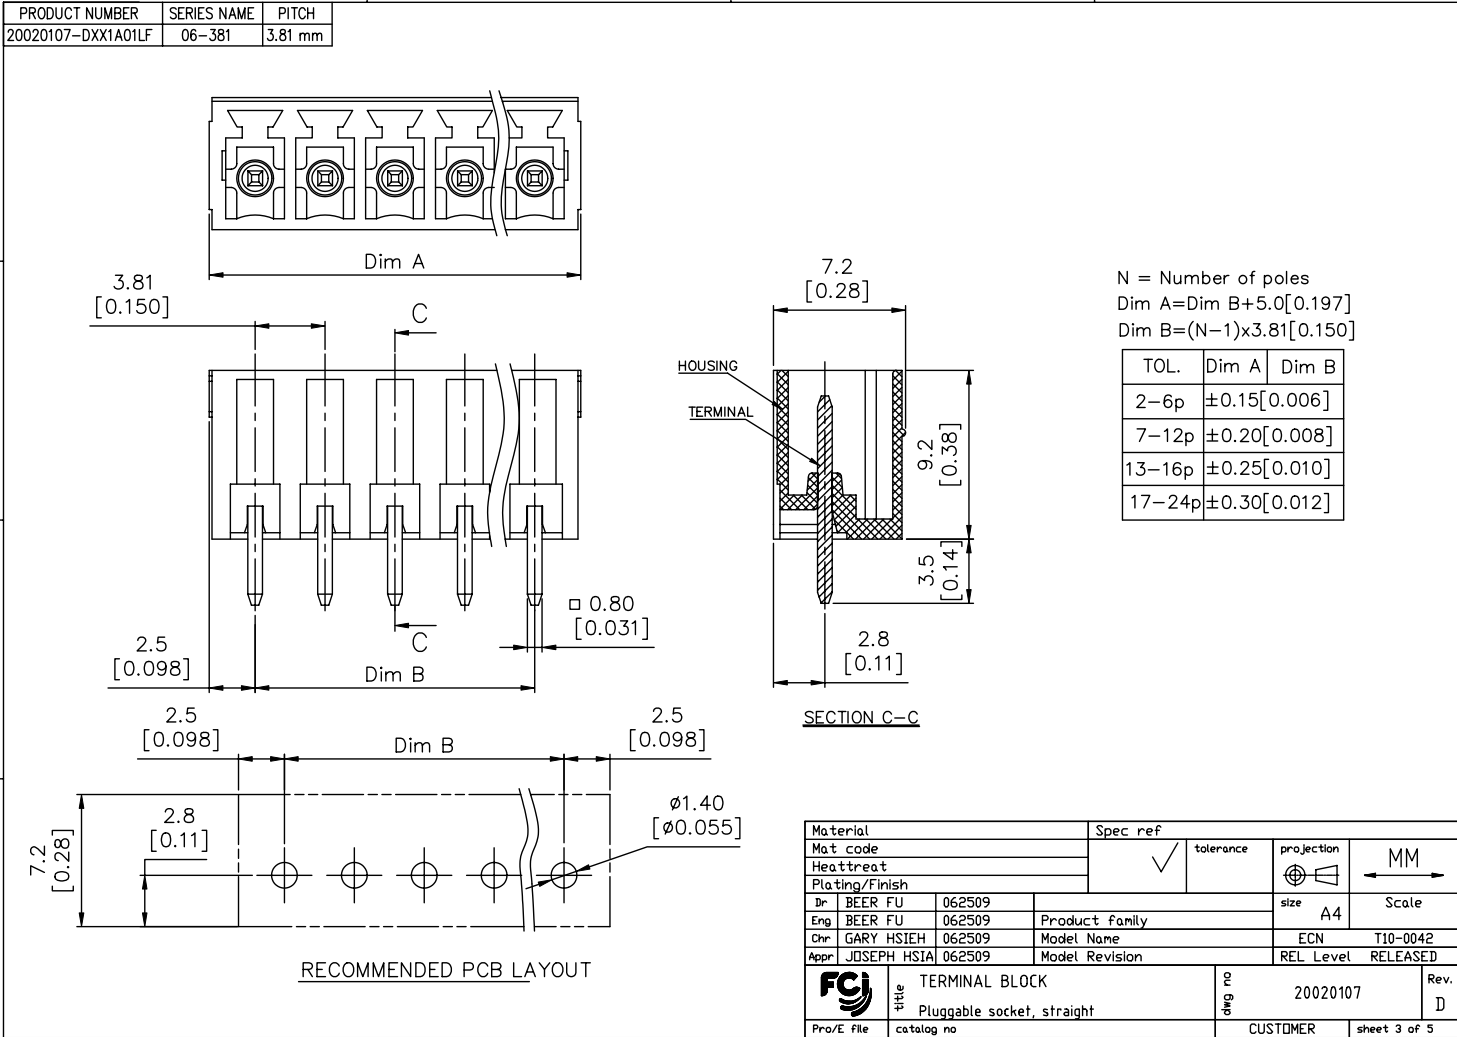




This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI. No part of the information shown on this document may be used in any way or disclosed to others without the written consent of FCI. Copyright FCI.

PRODUCT NUMBER	SERIES NAME	PITCH
20020107-GXX1A01LF	06-500	5.00 mm

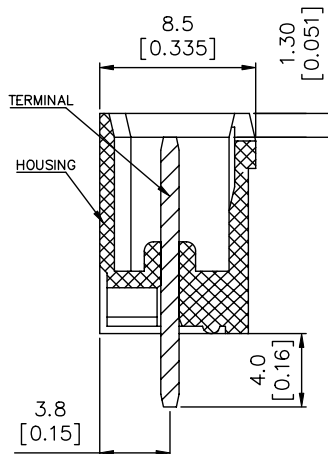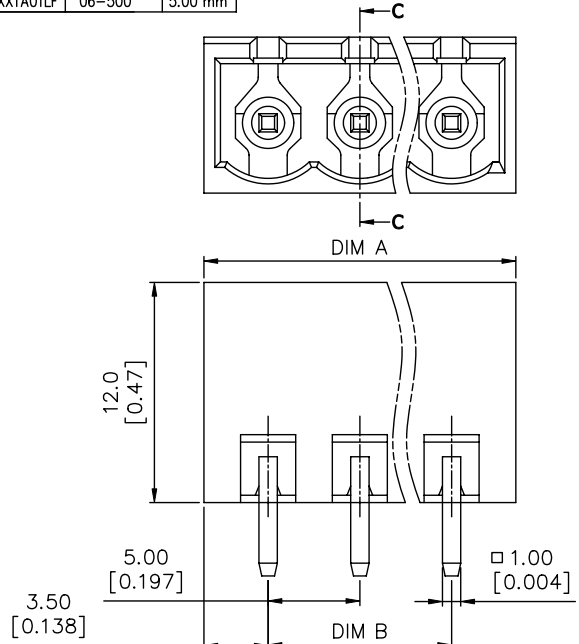

N = Number of poles
 Dim A = $N \times 5.0 [0.197] + 2.0 [0.193]$
 Dim B = $(N - 1) \times 5.0 [0.197]$

TOL.	Dim A	Dim B
	2-6p	$\pm 0.15 [0.006]$
	7-12p	$\pm 0.25 [0.010]$
	13-16p	$\pm 0.35 [0.014]$
	17-24p	$\pm 0.40 [0.016]$

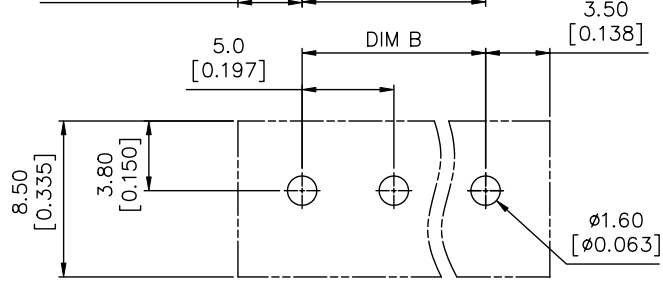


SECTION C-C

Material		Spec ref	
Mat code		tolerance	projection
Heat treat		<input checked="" type="checkbox"/>	
Plating/Finish		size	MM
Dr BEER FU 062509	Product family	A4	Scale
Eng GARY HSIEH 062509	Model Name	ECN	T10-0042
Appr JOSEPH HSIA 062509	Model Revision	REL Level	RELEASED
	title	dwg no	Rev.
	TERMINAL BLOCK	20020107	D
Pro/E file	catalog no	CUSTOMER	sheet 4 of 5
	Pluggable socket, straight		



This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI. No part of the information shown on this document may be used in any way or disclosed to others without the written consent of FCI. Copyright FCI.

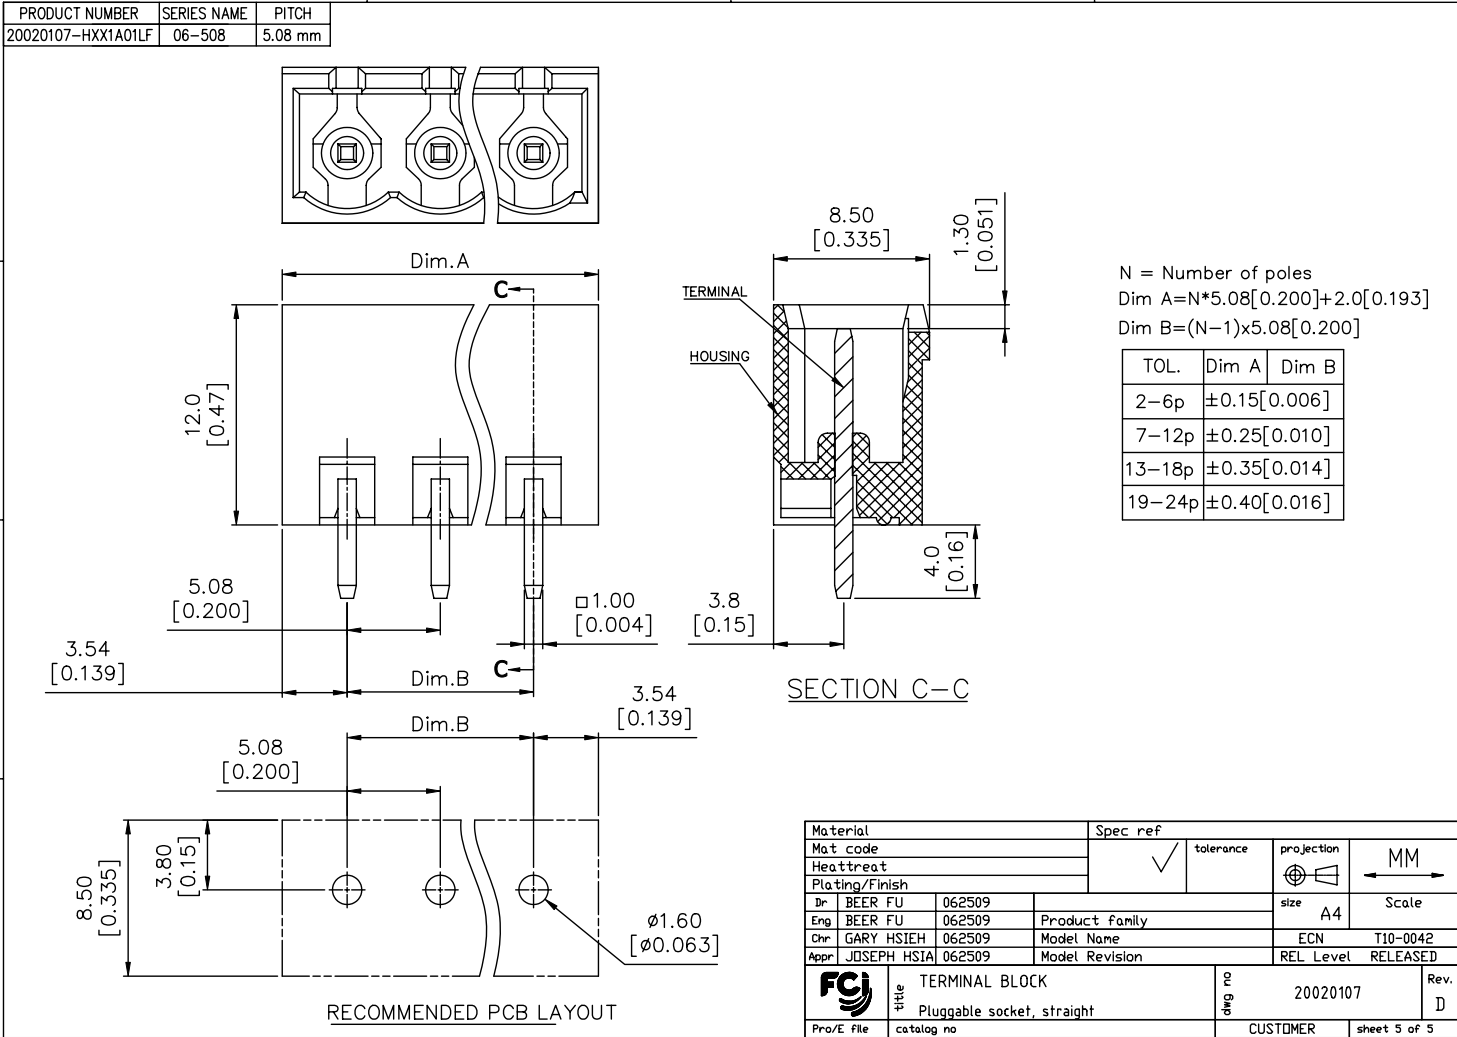

Material		Spec ref	
Mat code		tolerance	projection
Heattreat		✓	MM
Plating/Finish		size	Scale
Dr BEER FU 062509	Product family	A4	
Eng BEER FU 062509	Model Name	ECN	T10-0042
Chr GARY HSIEH 062509	Model Revision	REL Level	RELEASED
Appr JOSEPH HSIA 062509			
title	TERMINAL BLOCK	dwg no	20020107
Pro/E file	catalog no	CUSTOMER	sheet 5 of 5
	Pluggable socket, straight		Rev. D