
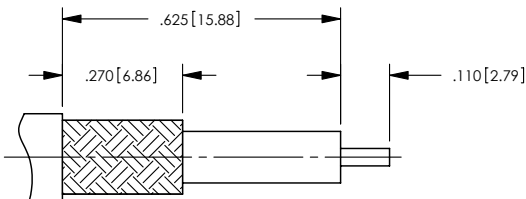


NOTES: UNLESS OTHERWISE SPECIFIED  
 1. FOR GENERAL SERIES SPECIFICATIONS, SEE SD12-0000.


2. MATERIAL SPECIFICATIONS:  
 CENTER CONTACT, SLEEVE AND BUSHING: BRASS PER ASTM B16.  
 BODY, OUTER CONTACT, AND FERRULE: COPPER ALLOY  
 INSULATOR: TEFLON PER ASTM D1710
3. FINISH SPECIFICATIONS:  
 CENTER CONTACT: .000050 MIN GOLD PER ASTM B488  
 OVER .000100 MIN COPPER PER ASTM B734 (RoHS)  
 ALL OTHER METAL PARTS: .000080 MIN TRI-METAL  
 OVER .000100 MIN COPPER PER ASTM B734 (RoHS)  
 FERRULE: .000010 MIN TRI-METAL OVER .000100 MIN COPPER PER ASTM B734 (RoHS)
4. FERRULE AND CONTACT SHIPPED LOOSE.
5. DESIGNED FOR USE WITH RG55/U, 142, 223, 400 AND EQUIVALENT CABLES.
6. CRIMP FERRULE USING .213 HEX DIE.
7. MATES WITH STANDARD TYPE N INTERFACE PER  
 MIL-STD-348A, FIG 304.2 (.187±.015 THREAD LENGTH).
8. ELECTRICAL SPECIFICATIONS:  
 FREQUENCY RANGE: DC-11GHz  
 VSWR: 1.15 MAX

REV	DESCRIPTION	BY DATE	APPD
A	RELEASED PER ER5435	11/28/07	CWB

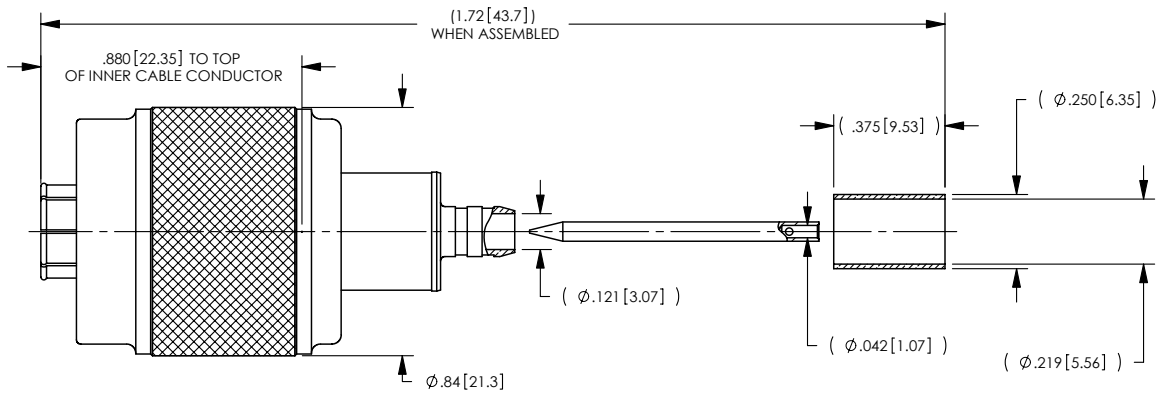

CABLE TRIM DIMENSIONS

CATALOG P/N: 120-900-1161R

<small>PER ASME Y14.5M-1994          UNLESS OTHERWISE SPECIFIED:          DIMENSIONS ARE IN INCHES [MM]          TOLERANCES:          DECIMAL: .XX ± .01 [0.3]          .XXX ± .005 [0.13]          .XXXX ± .000X          ANGLES: ± 2° SCALE: 2:1</small>				 Winchester Electronics Corporation 62 Barnes Industrial Road North Wallingford, Connecticut 06492	
<b>CUSTOMER DRAWING</b>		QC-N STRAIGHT PLUG CRIMP ATTACHMENT			
<small>DRAWN</small> PSM	<small>DATE</small> 11/14/05	<small>APPROVED</small> DC	<small>DATE</small> 11/28/07	<b>A</b> SD120-900-1161R SH1 1 OF 1	<small>REV</small> A
<small>APPROVED</small> JC	<small>DATE</small> 11/28/07	<small>APPROVED</small> M.AYUB	<small>DATE</small> 11/28/07		