

MUR1605FC-MUR1660FC

Ultra Fast Rectifiers

VOLTAGE RANGE: 50-600V

CURRENT: 16A




ITO-220AB

Features

- Low cost
- Diffused junction
- Low leakage
- Low forward voltage drop
- High current capability
- Easily cleaned with Alcohol, Isopropanol and similar solvents
- The plastic material carries U/L recognition 94V-0

Mechanical Data

- Case: JEDEC ITO-220AB, molded plastic
- Polarity: Color band denotes cathode
- Weight: 0.08ounce, 2.24 grams
- Mounting position: Any

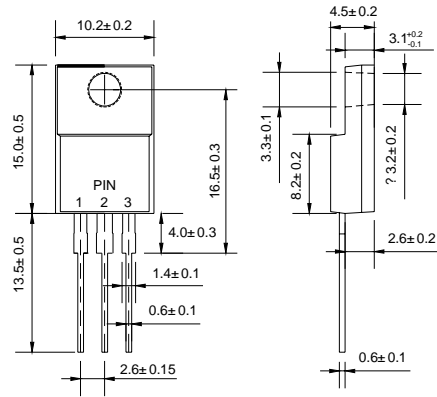

Dimensions in millimeters

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

		MUR 1605FC	MUR 1610FC	MUR 1615FC	MUR 1620FC	MUR 1640FC	MUR 1660FC	UNITS
Maximum recurrent peak reverse voltage	V_{RRM}	50	100	150	200	400	600	V
Maximum RMS voltage	V_{RMS}	35	70	105	140	280	420	V
Maximum DC blocking voltage	V_{DC}	50	100	150	200	400	600	V
Maximum average forward rectified current @ $T_C=150$	$I_{(AV)}$	per leg		8.0				A
		total device		16				
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load	I_{FSM}			100				A
Maximum instantaneous forward voltage @ 8.0A, $T_J=25$	V_F	0.975		1.30		1.50		V
		0.895		1.00		1.20		
Maximum reverse current at rated DC blocking voltage @ $T_C=25$	I_R	5.0		10				μA
		250		500				
Maximum reverse recovery time (Note2)	t_{rr}	25		50				ns
Typical thermal resistance junction to case	$R_{\theta JC}$	3.0		2.0				/W
Operating junction temperature range	T_j	- 55 ---- + 175						
Storage temperature range	T_{STG}	- 55 ---- + 175						

NOTE: 1. Pulse test: pulse width=300 μs , duty cycle 2.0%.
2. Measured with $I_F=0.5A$, $I_R=1.0A$, $t_{rr}=0.25A$.

MUR1605FC-MUR1660FC

Ultra Fast Rectifiers

Ratings AND Characteristic Curves

FIG.1 – TYPICAL FORWARD CHARACTERISTIC

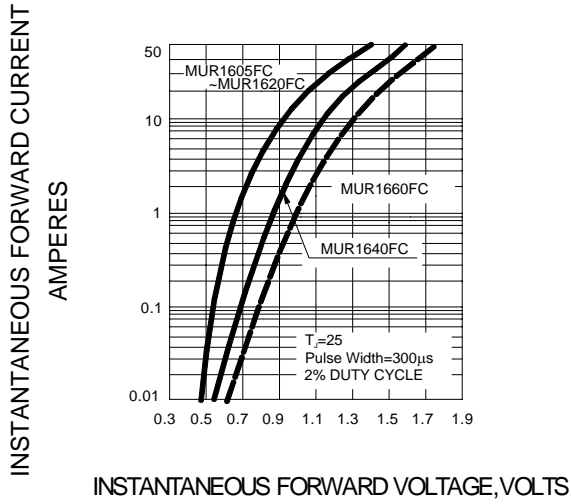


FIG.2 – TYPICAL REVERSE CHARACTERISTICS

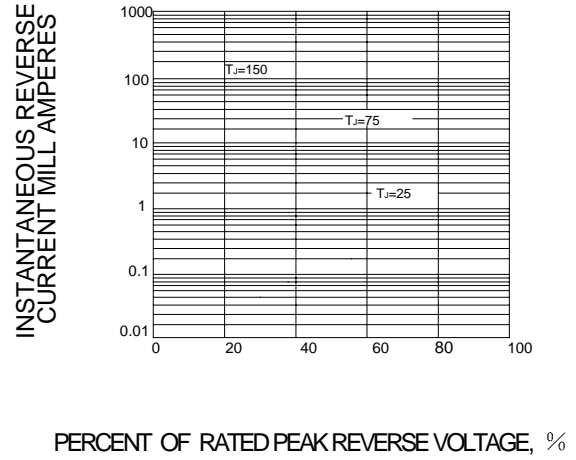


FIG.3 – PEAK FORWARD SURGE CURRENT

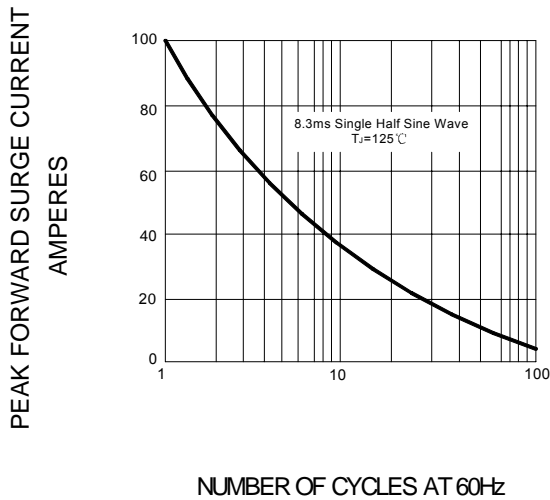


FIG.4 – FORWARD DERATING CURVE

