


MUR440-G Thru. MUR460-G

Voltage: 400 to 600 V

Current: 4.0 A

RoHS Device




Features

- Fast switching for high efficiency.
- Low forward voltage drop.
- High current capability.
- Low reverse leakage current.
- High surge current capability.

Mechanical data

- Case: Molded plastic, DO-201AD
- Epoxy: UL 94V-0 rate flame retardant
- Terminals: Solderable per MIL-STD-202, method 208
- Polarity: Color band denotes cathode
- Mounting position: Any
- Weight: 1.1 grams

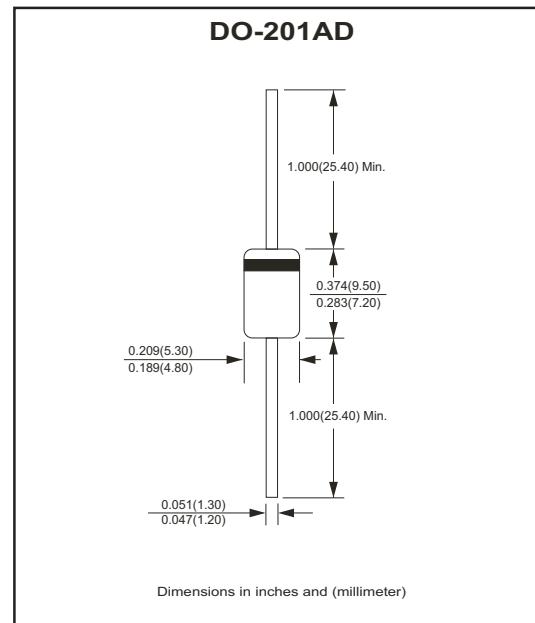

Electrical Characteristics

(at TA=25°C unless otherwise noted)

Ratings at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load derate current by 20%.

Parameter	Symbol	MUR440-G	MUR460-G	Unit
Maximum recurrent peak reverse voltage	V _{RRM}	400	600	V
Maximum peak reverse voltage	V _{RWM}	280	420	V
Maximum DC blocking voltage	V _{DC}	400	600	V
Maximum average forward rectified current T _A =75°C	I _(AV)	4.0		
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	150		
Maximum instantaneous @ 4.0A Forward voltage @ 3.0A	V _F	1.28 1.25		V
Maximum DC reverse current T _A =25°C At rated DC blocking voltage T _A =150°C	I _R	5.0 250		µA
Maximum reverse recovery time at I _r =0.5A, I _{rr} =1.0A, I _{rrr} =0.25A	T _{rr}	50		
Operating junction and Storage temperature range	T _j , T _{STG}	-55 to +175		
				°C

NOTES:

1. Pulse test : tp=300us,duty cycle<2%.
2. Lead length=1/2" on P.C. board with 1.5" x 1.5" copper surface.

Ultra Fast Recovery Rectifier

Comchip
SMD Diode Specialist

RATING AND CHARACTERISTIC CURVES (MUR440-G Thru. MUR460-G)

Fig.1 Forward Current Derating Curve

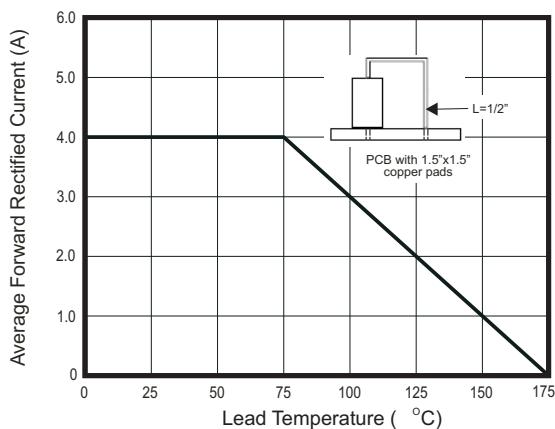


Fig.2 Maximum Non-repetitive Peak Forward Surge Current

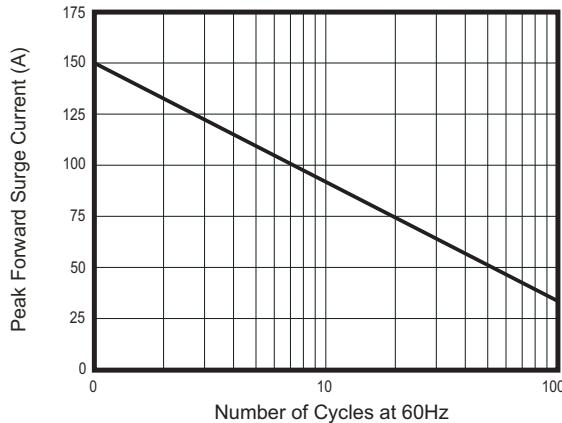


Fig.3 Typical Instantaneous Forward Characteristics

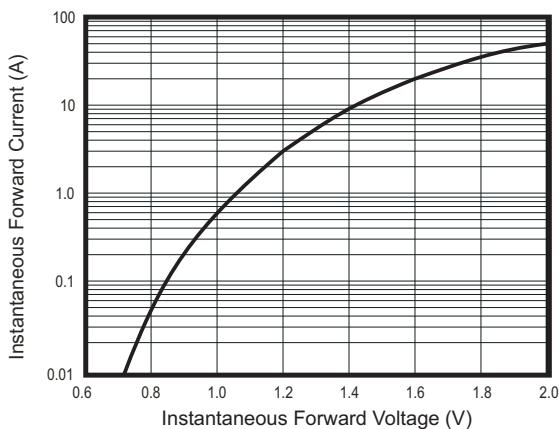


Fig.4 Typical Reverse Characteristics

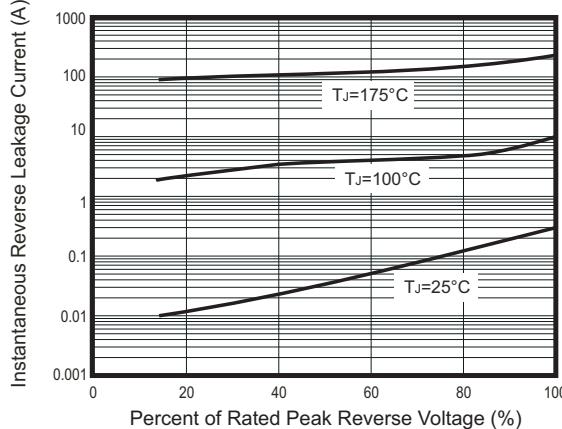


Fig.5 Typical Junction Capacitance per leg

