

# MUR505-MUR560

Super Fast Rectifiers

VOLTAGE RANGE: 50 --- 600 V

CURRENT: 5.0 A




TO-220AC

## Features

- ◇ Low cost
- ◇ Low leakage
- ◇ Low forward voltage drop
- ◇ High current capability
- ◇ Easily cleaned with alcohol, Isopropanol and similar solvents
- ◇ The plastic material carries U/L recognition 94V-0

## Mechanical Data

- ◇ Case: JEDEC TO-220AC, molded plastic
- ◇ Polarity: As marked
- ◇ Weight: 0.069 ounces, 1.96 gram
- ◇ Mounting position: Any

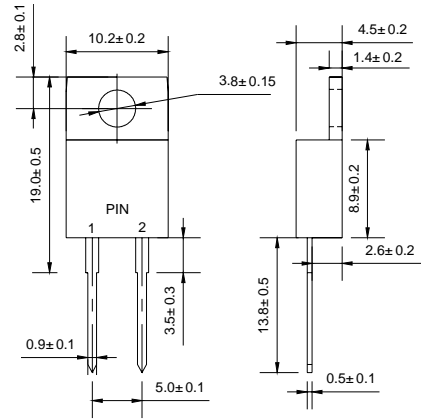

Dimensions in millimeters

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

		MUR 505	MUR 510	MUR 515	MUR 520	MUR 540	MUR 560	UNITS
Maximum recurrent peak reverse voltage	$V_{RRM}$	50	100	150	200	400	600	V
Maximum RMS voltage	$V_{RMS}$	35	70	105	140	280	420	V
Maximum DC blocking voltage	$V_{DC}$	50	100	150	200	400	600	V
Maximum average forward rectified current @ $T_C=100^\circ\text{C}$	$I_{F(AV)}$	5.0						A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load @ $T_J=125^\circ\text{C}$	$I_{FSM}$	60						A
Maximum instantaneous forward voltage @ 5.0A	$V_F$	0.975		1.3		1.5		V
Maximum reverse current @ $T_A=25^\circ\text{C}$ at rated DC blocking voltage @ $T_A=150^\circ\text{C}$	$I_R$	5.0		10.0		500		$\mu\text{A}$
Maximum reverse recovery time (Note1)	$t_{rr}$	25		50				ns
Operating junction temperature range	$T_J$	- 55 ----- + 150						$^\circ\text{C}$
Storage temperature range	$T_{STG}$	- 55 ----- + 150						$^\circ\text{C}$


NOTE: 1. Measured with  $I_F=0.5\text{A}$ ,  $I_R=1\text{A}$ ,  $I_{rr}=0.25\text{A}$ .

# MUR505-MUR560


Super Fast Rectifiers

## Ratings AND Characteristic Curves

**FIG.1 – TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC**

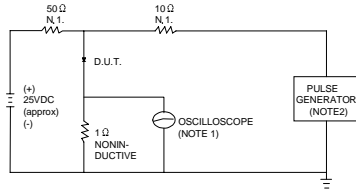


NOTES: 1. RISE TIME = 7ns MAX INPUT IMPEDANCE = 1MΩ, 22pF.  
2. RISE TIME = 10ns MAX SOURCE IMPEDANCE = 50 Ω.




SET TIME BASE FOR 10/20 ns/cm

**FIG.2 – TYPICAL FORWARD CHARACTERISTIC**

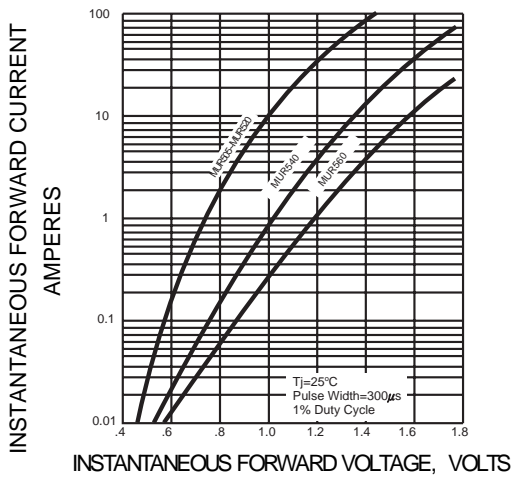

**FIG.3 – PEAK FORWARD SURGE CURRENT**

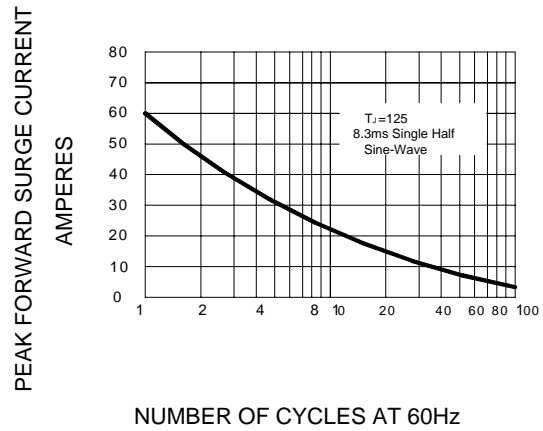

**FIG.4 FORWARD DERATING CURVE**

