

International  
**IR** Rectifier

MURB2020CTPbF  
MURB2020CT-1PbF

## Ultrafast Rectifier

### Features

- Ultrafast Recovery Time
- Low Forward Voltage Drop
- Low Leakage Current
- 175°C Operating Junction Temperature
- Lead-Free ("PbF" suffix)

$$t_{rr} = 25\text{ns}$$

$$I_{F(AV)} = 20\text{Amp}$$

$$V_R = 200\text{V}$$

### Description/ Applications

International Rectifier's MUR.. series are the state of the art Ultra fast recovery rectifiers specifically designed with optimized performance of forward voltage drop and ultra fast recovery time.

The planar structure and the platinum doped life time control, guarantee the best overall performance, ruggedness and reliability characteristics.





These devices are intended for use in the output rectification stage of SMPS, UPS, DC-DC converters as well as free-wheeling diode in low voltage inverters and chopper motor drives.

Their extremely optimized stored charge and low recovery current minimize the switching losses and reduce over dissipation in the switching element and snubbers.

### Absolute Maximum Ratings

Parameters		Max	Units
$V_{RRM}$	Peak Repetitive Peak Reverse Voltage	200	V
$I_{F(AV)}$	Average Rectified Forward Current	10	A
	Total Device, (Rated $V_R$ ), $T_C = 145^\circ\text{C}$	20	
$I_{FSM}$	Non Repetitive Peak Surge Current	100	
$I_{FM}$	Peak Repetitive Forward Current	20	
	(Rated $V_R$ , Square wave, 20 KHz), $T_C = 145^\circ\text{C}$		
$T_J, T_{STG}$	Operating Junction and Storage Temperatures	-65 to 175	$^\circ\text{C}$

### Case Styles

MURB2020CTPbF	MURB2020CT-1PbF
  <b>D<sup>2</sup>PAK</b>	  <b>TO-262</b>

**Electrical Characteristics @ T<sub>J</sub> = 25°C (unless otherwise specified)**

Parameters	Min	Typ	Max	Units	Test Conditions
V <sub>BR</sub> , V <sub>r</sub> Breakdown Voltage, Blocking Voltage	200	-	-	V	I <sub>R</sub> = 100μA
V <sub>F</sub> Forward Voltage	-	-	0.85	V	I <sub>F</sub> = 8A, T <sub>J</sub> = 125°C
	-	-	1.15	V	I <sub>F</sub> = 16A, T <sub>J</sub> = 25°C
	-	-	1.05	V	I <sub>F</sub> = 16A, T <sub>J</sub> = 125°C
I <sub>R</sub> Reverse Leakage Current	-	-	15	μA	V <sub>R</sub> = V <sub>R</sub> Rated
	-	-	250	μA	T <sub>J</sub> = 150°C, V <sub>R</sub> = V <sub>R</sub> Rated
C <sub>T</sub> Junction Capacitance	-	55	-	pF	V <sub>R</sub> = 200V
L <sub>S</sub> Series Inductance	-	8.0	-	nH	Measured lead to lead 5mm from package body

**Dynamic Recovery Characteristics @ T<sub>J</sub> = 25°C (unless otherwise specified)**

Parameters	Min	Typ	Max	Units	Test Conditions
t <sub>rr</sub> Reverse Recovery Time	-	-	35	ns	I <sub>F</sub> = 1.0A, di <sub>F</sub> /dt = 50A/μs, V <sub>R</sub> = 30V
	-	-	25		I <sub>F</sub> = 0.5A, I <sub>R</sub> = 1.0A, I <sub>REC</sub> = 0.25A
	-	21	-		T <sub>J</sub> = 25°C
	-	35	-		T <sub>J</sub> = 125°C
I <sub>RRM</sub> Peak Recovery Current	-	1.9	-	A	T <sub>J</sub> = 25°C
	-	4.8	-		T <sub>J</sub> = 125°C
Q <sub>rr</sub> Reverse Recovery Charge	-	25	-	nC	T <sub>J</sub> = 25°C
	-	78	-		T <sub>J</sub> = 125°C

**Thermal - Mechanical Characteristics**

Parameters	Min	Typ	Max	Units
T <sub>J</sub> Max. Junction Temperature Range	- 65	-	175	°C
T <sub>Stg</sub> Max. Storage Temperature Range	- 65	-	175	
R <sub>thJC</sub> Thermal Resistance, Junction to Case	-	-	2.5	°C/W
R <sub>thJA</sub> Thermal Resistance, Junction to Ambient	-	-	50	
R <sub>thCS</sub> <sup>①</sup> Thermal Resistance, Case to Heatsink	-	0.5	-	
Wt Weight	-	2.0	-	g
	-	0.07	-	(oz)
Mounting Torque	6.0	-	12	Kg-cm
	5.0	-	10	lbf.in
Marking Device	MURB2020CT		Case style D <sup>2</sup> Pak	
	MURB2020CT-1		Case style TO-262	

① Mounting Surface, Flat, Smooth and Greased

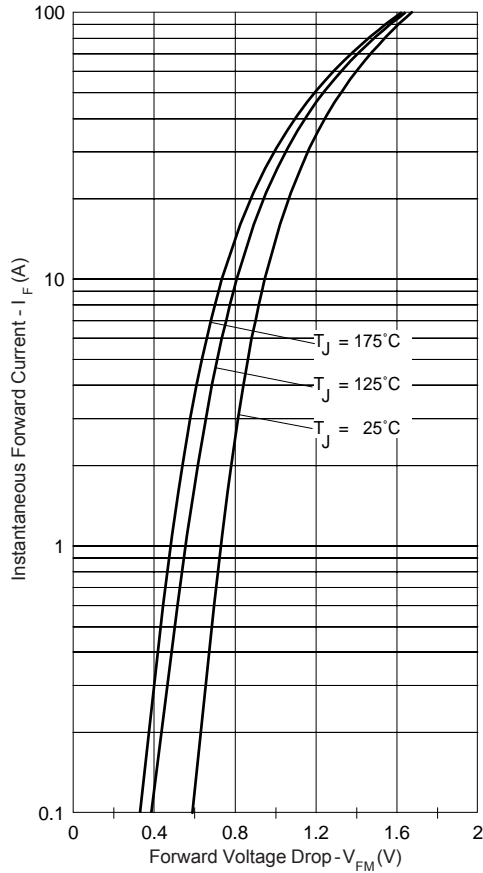


Fig. 1 - Typical Forward Voltage Drop Characteristics

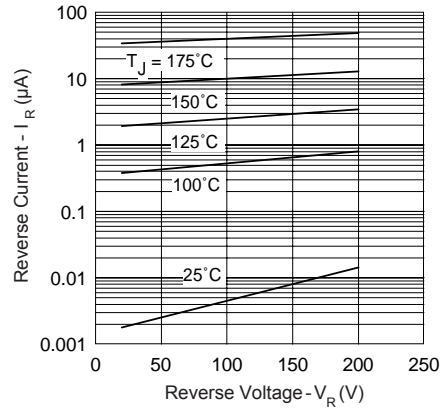


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage

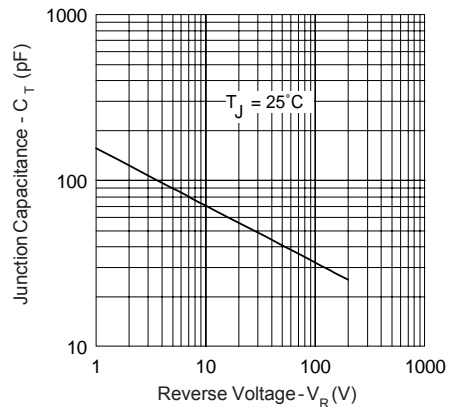


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

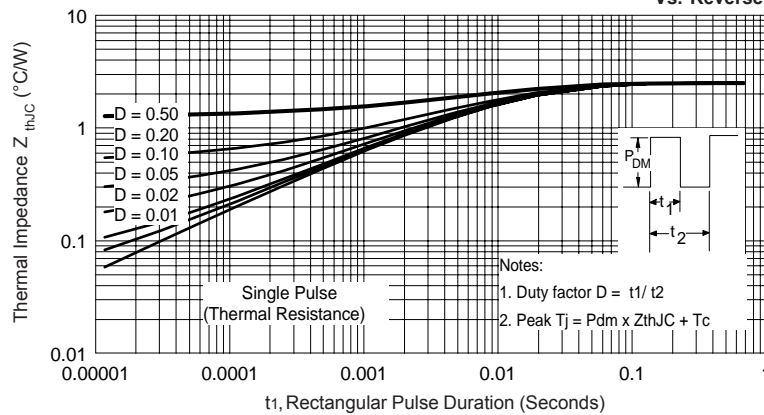


Fig. 4 - Max. Thermal Impedance  $Z_{thJC}$  Characteristics

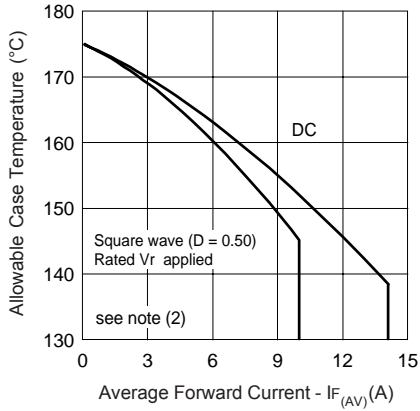


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current

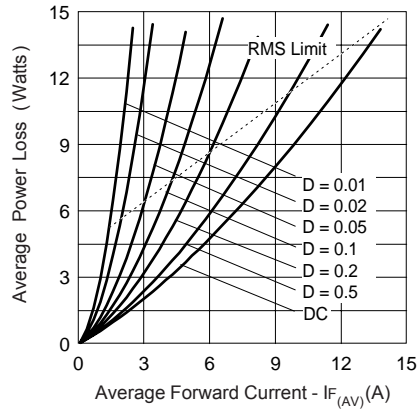


Fig. 6 - Forward Power Loss Characteristics

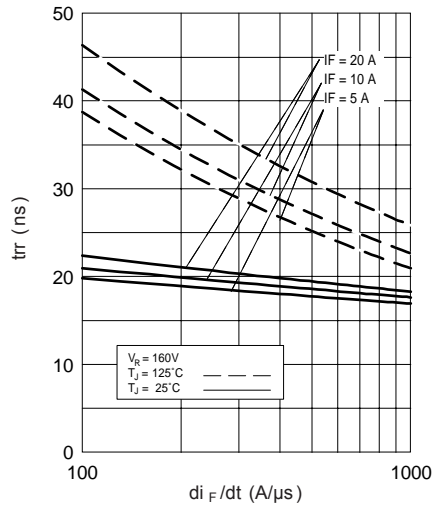


Fig. 7 - Typical Reverse Recovery vs.  $di_F/dt$

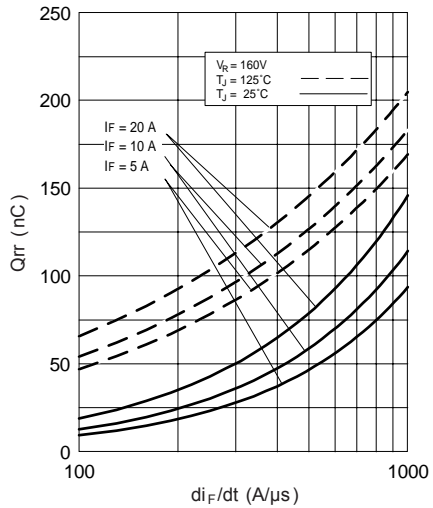


Fig. 8 - Typical Stored Charge vs.  $di_F/dt$

- (2) Formula used:  $T_C = T_J - (Pd + Pd_{REV}) \times R_{thJC}$ ;  
 $Pd = \text{Forward Power Loss} = I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$  (see Fig. 6);  
 $Pd_{REV} = \text{Inverse Power Loss} = V_{R1} \times I_R (1 - D)$ ;  $I_R @ V_{R1} = \text{rated } V_R$

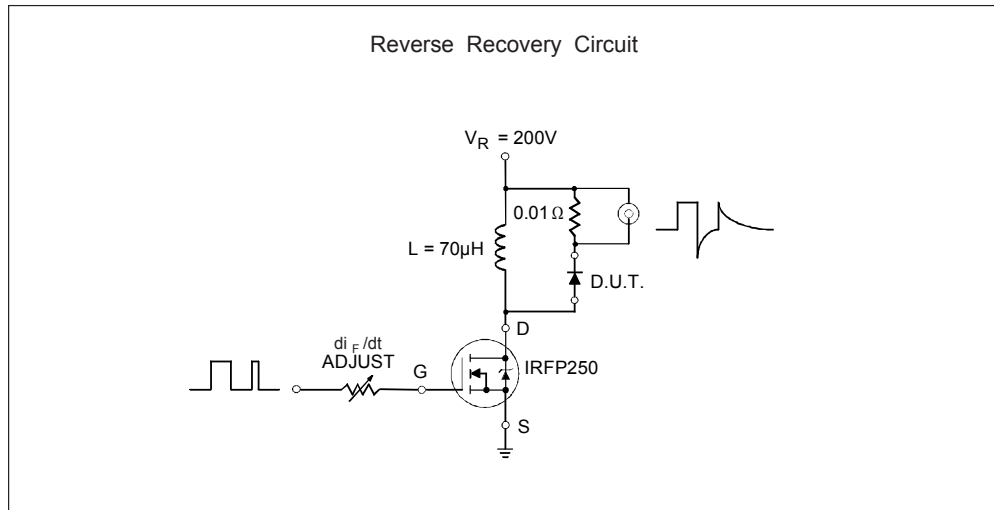


Fig. 9- Reverse Recovery Parameter Test Circuit



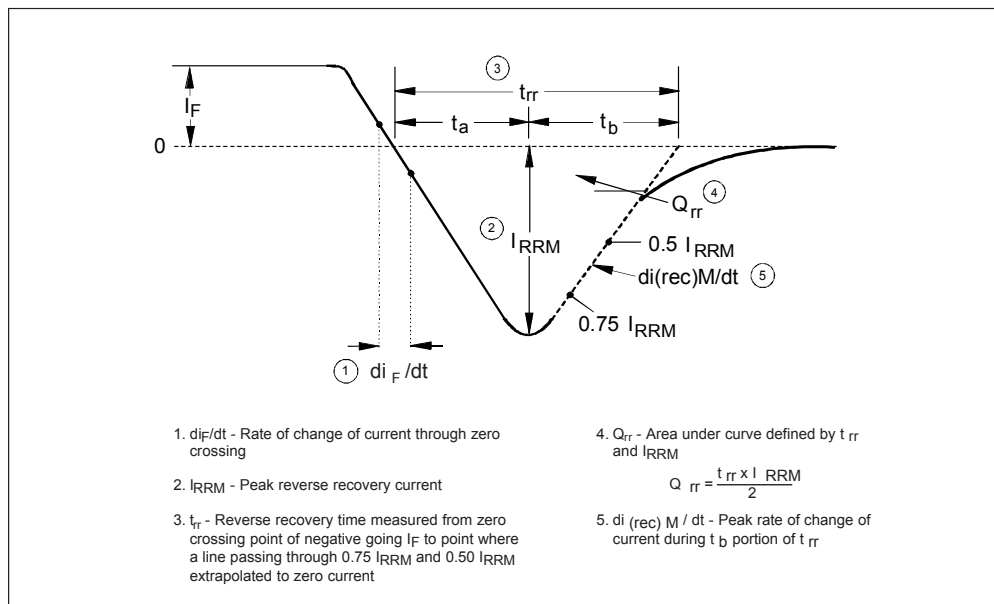


Fig. 10 - Reverse Recovery Waveform and Definitions

Outlines Table

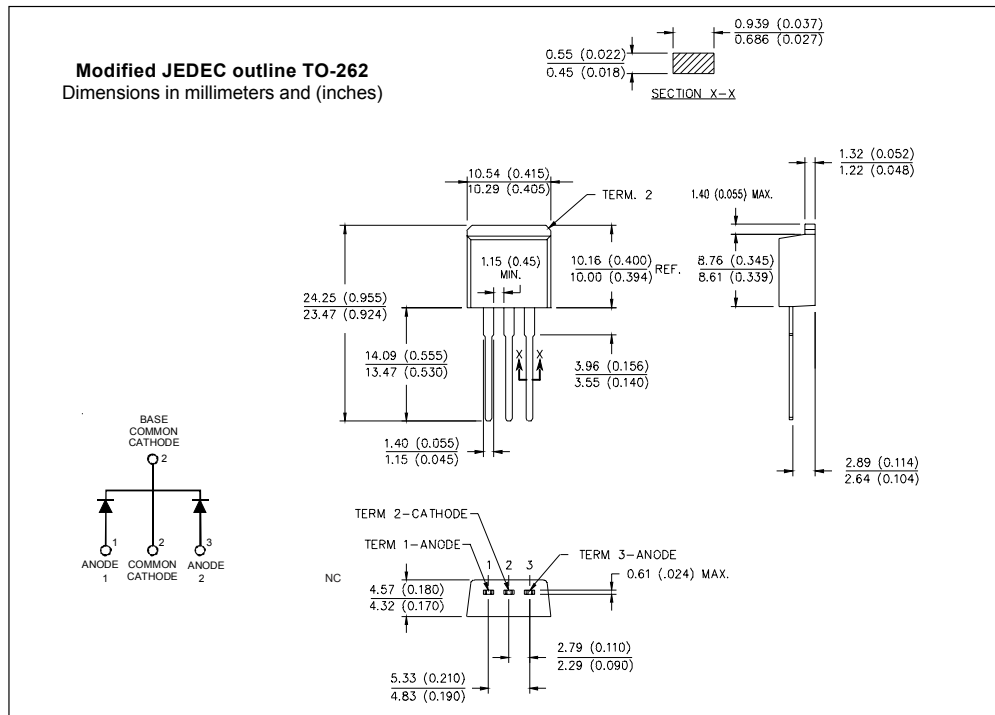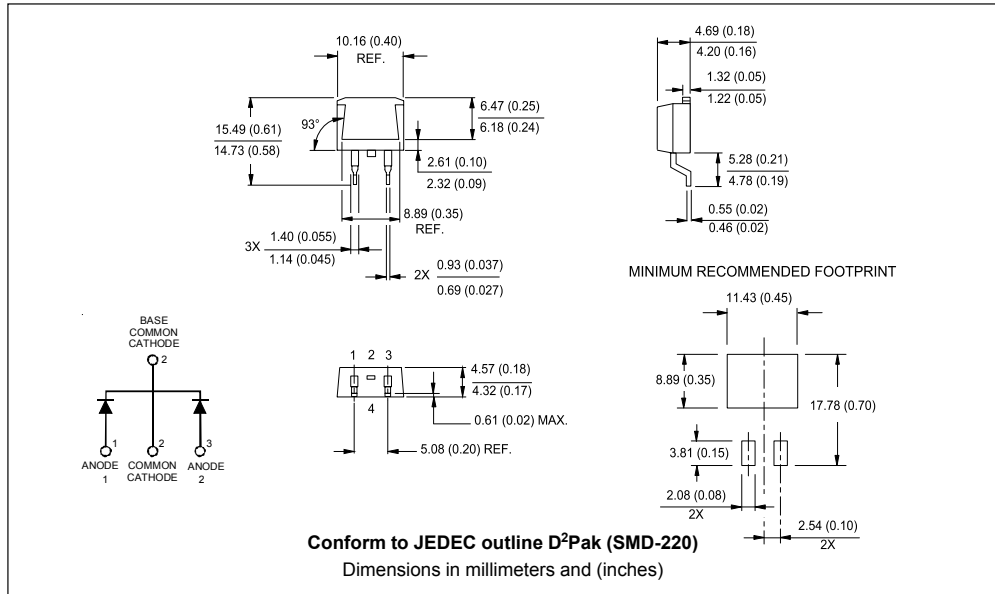


Part Marking Information

**D<sup>2</sup>PAK**

EXAMPLE: THIS IS A MURB2020CT  
 LOT CODE 8024  
 ASSEMBLED ON WW 02, 2000


Note: "P" in assembly line position indicates "Lead-Free"

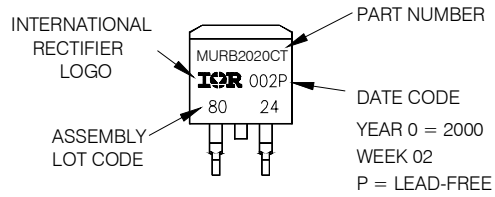


**TO-262**

EXAMPLE: THIS IS A MURB2020CT-1  
 LOT CODE 8024  
 ASSEMBLED ON WW 02, 2000

Note: "P" in assembly line position indicates "Lead-Free"

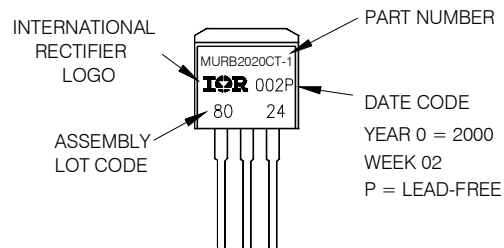

Tape & Reel Information

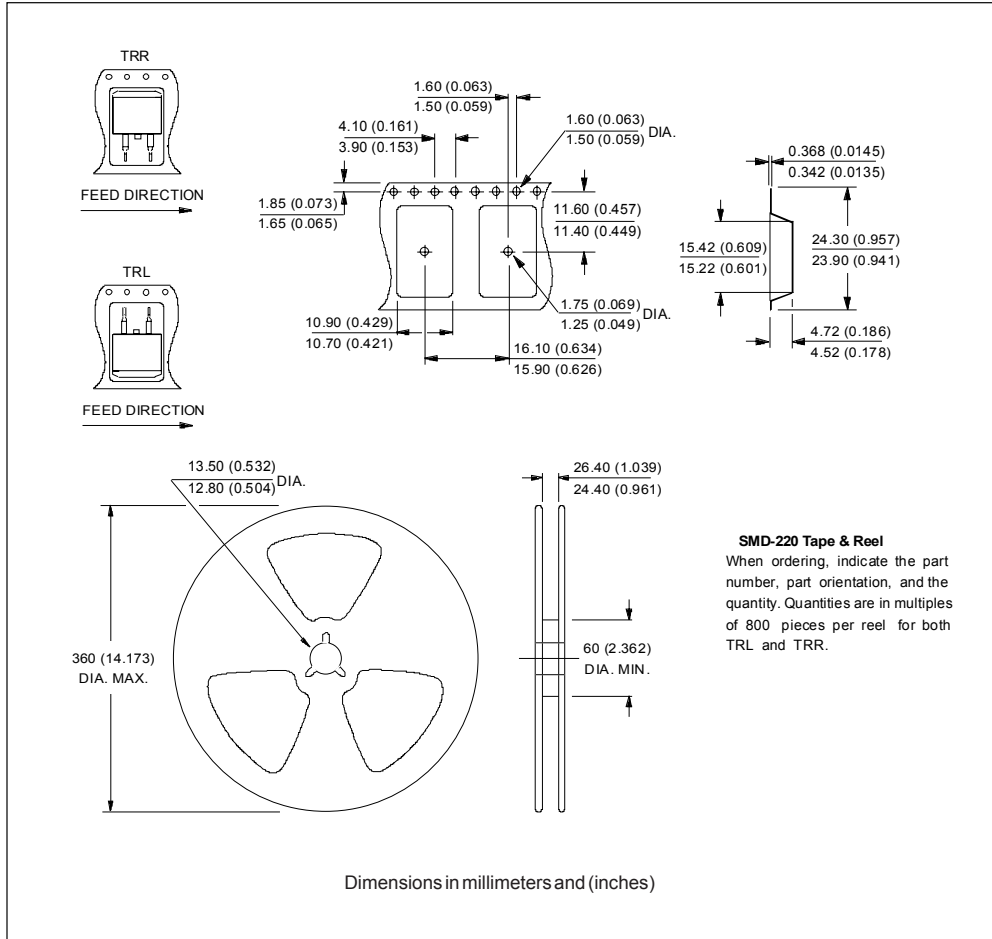



Ordering Information Table

Device Code																	
	<table border="1" style="margin: auto;"> <tr> <td style="padding: 5px;"><b>MUR</b></td> <td style="padding: 5px;"><b>B</b></td> <td style="padding: 5px;"><b>20</b></td> <td style="padding: 5px;"><b>20</b></td> <td style="padding: 5px;"><b>CT</b></td> <td style="padding: 5px;"><b>-1</b></td> <td style="padding: 5px;"><b>TRL</b></td> <td style="padding: 5px;"><b>PbF</b></td> </tr> <tr> <td style="text-align: center;">①</td> <td style="text-align: center;">②</td> <td style="text-align: center;">③</td> <td style="text-align: center;">④</td> <td style="text-align: center;">⑤</td> <td style="text-align: center;">⑥</td> <td style="text-align: center;">⑦</td> <td style="text-align: center;">⑧</td> </tr> </table>	<b>MUR</b>	<b>B</b>	<b>20</b>	<b>20</b>	<b>CT</b>	<b>-1</b>	<b>TRL</b>	<b>PbF</b>	①	②	③	④	⑤	⑥	⑦	⑧
<b>MUR</b>	<b>B</b>	<b>20</b>	<b>20</b>	<b>CT</b>	<b>-1</b>	<b>TRL</b>	<b>PbF</b>										
①	②	③	④	⑤	⑥	⑦	⑧										
<b>1</b>	- Ultrafast MUR Series																
<b>2</b>	- B = D <sup>2</sup> Pak/ TO-262																
<b>3</b>	- Current Rating (20 = 20A)																
<b>4</b>	- Voltage Rating (20 = 200V)																
<b>5</b>	- CT = Center Tap (Dual) TO-220 /D <sup>2</sup> PAK/ TO-262																
<b>6</b>	- -1 = TO-262																
<b>7</b>	- <ul style="list-style-type: none"> <li>• none = Tube (50 pieces)</li> <li>• TRL = Tape &amp; Reel (Left Oriented, for D<sup>2</sup>PAk package)</li> <li>• TRR = Tape &amp; Reel (Right Oriented, for D<sup>2</sup>PAk package)</li> </ul>																
<b>8</b>	- <ul style="list-style-type: none"> <li>• none = Standard Production</li> <li>• PbF = Lead-Free</li> </ul>																

Data and specifications subject to change without notice.  
 This product has been designed and qualified for Industrial Level and Lead-Free.  
 Qualification Standards can be found on IR's Web site.