



SMT Power Transformer

For Analog Devices ADM2482E and ADM2487E RS-485 Transceivers



- Designed specifically for use with Analog Devices ADM2482E and ADM2487E High Speed, Isolated RS-485 Transceivers with Integrated Transformer Driver
- Center tapped primary and secondary
- 2500 Vrms primary to secondary isolation

Core material Ferrite

Terminations RoHS compliant tin-silver over tin over nickel over phos bronze. Other terminations available at additional cost.

Weight 1.0 g

Ambient temperature -40°C to +85°C

Storage temperature Component: -40°C to +85°C.

Packaging: -40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Failures in Time (FIT) / Mean Time Between Failures (MTBF)

38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332

Packaging 600 per 13" reel; Plastic tape: 24 mm wide, 0.37 mm thick, 16 mm pocket spacing, 6.1 mm pocket depth

PCB washing Only pure water or alcohol recommended



Part number ¹	Pri / sec voltage	Inductance ² min (µH)	DCR max (Ohms) ³		Leakage inductance ⁴ max (µH)	Volt-time product ⁵ (V-µsec)	Power ⁶ (W)	Turns ratio pri : sec
			1/2 pri	1/2 sec				
GA3157-AL_	5 V to 3.3 V	45.6	0.130	0.155	1.14	34.4	7.2	1 : 0.88

1. When ordering, please specify **termination** and **packaging** codes:


GA3157-AL D

- Termination:** L = RoHS compliant tin-silver over tin over nickel over phos bronze.
Special order: T = RoHS tin-silver-copper (95.5/4/0.5) or S = non-RoHS tin-lead (63/37).
Packaging: D = 13" machine ready reel. EIA-481 embossed plastic tape (600 per full reel).
 B = Less than full reel. In tape, but not machine ready. To have a leader and trailer added (\$25 charge), use code letter D instead.

- Inductance is tested between pins 4 and 3 at 500 kHz, 0.5 Vrms, 0 Adc.
 - DCR is for each half of the primary and secondary.
 - Leakage inductance is for the primary with both windings connected in series and with the secondary windings shorted.
 - Based on Bs_{at} of the core at 25°C and number of turns on winding 4-3.
 - Calculated output power based on 150 kHz operating frequency. Power varies depending on application.
 - Electrical specifications at 25°C.
- Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

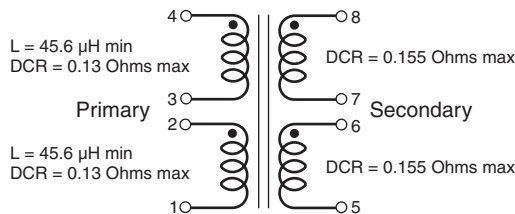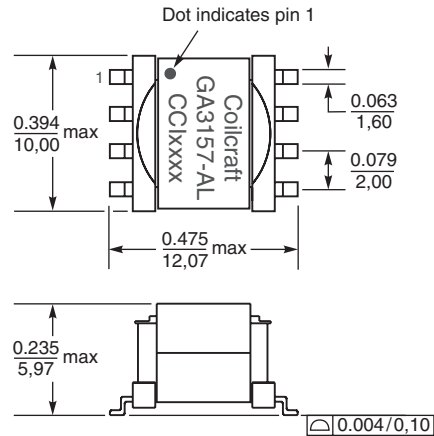

Primary windings and secondary windings to be connected in series on the PCB board.

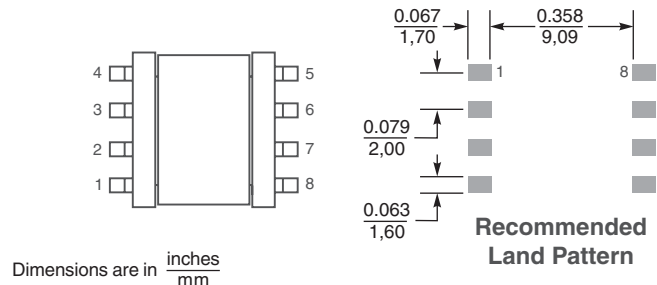

Dimensions are in inches/mm



Specifications subject to change without notice. Please check our website for latest information.

Document 686 Revised 10/16/09

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469

E-mail info@coilcraft.com Web http://www.coilcraft.com