

**NEW!**

Forward Converter Transformer

For Akros AS1130
PoE Controller



- Developed for Akros Silicon AS1130, 30 W PoE Controller with Integrated DC-DC Conversion
- Designed for forward topology operating at 350 kHz
- 1500 Vrms isolation from primary to secondary

Core material Ferrite

Terminations RoHS tin-silver over tin over nickel over phosphor bronze. Other terminations available at additional cost.

Weight 10.7 g

Ambient temperature -40°C to +125°C

Storage temperature Component: -40°C to +125°C.
Packaging: -40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Failures in Time (FIT) / Mean Time Between Failures (MTBF)
38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332

Packaging 175 per 13" reel Plastic tape: 44 mm wide, 0.4 mm thick, 32 mm pocket spacing, 11.9 mm pocket depth

PCB washing Only pure water or alcohol recommended

Part number ¹	Inductance ² min (μH)	DCR max (Ohms) ³ pri sec	Leakage inductance ⁴ max (μH)	Input voltage range (V)	Turns ratio ⁵ pri : sec	Output	Input filter inductor	Output filter inductor
GA3291-AL_	152	0.065 0.031	0.215	36 – 57	1 : 0.923	12 V, 2.5 A	DO1608C-103	MSS1278-683

1. When ordering, please specify a **packaging** code:

GA3291-AL D

Packaging: **D** = 13" machine ready reel. EIA-481 embossed plastic tape (175 parts per full reel).

B = Less than full reel. In tape, but not machine ready. To have a leader and trailer added (\$25 charge), use code letter D instead.

2. Inductance is measured at 300 kHz, 0.6 Vrms, 0 Adc.


3. DCR for the primary is measured from pin 1 to pin 3.

4. Leakage inductance is for the primary (pin 1 to pin 3) and is measured with the secondary shorted.


5. Turns ratio is based on the entire the primary winding (pin 1 to pin 3).

6. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

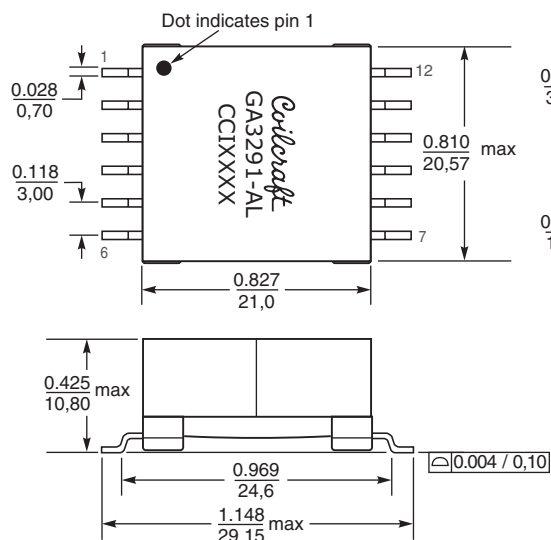

Recommended Land Pattern



Primary is pin 1 to pin 3. Terminal 2 is for internal connection only. Do not connected terminal 2 to ground or any circuitry.

Dimensions are in inches
mm

Coilcraft®

Specifications subject to change without notice.
Please check our website for latest information.

Document 674 Revised 10/28/08

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469

E-mail info@coilcraft.com Web <http://www.coilcraft.com>