

**Surge Arrester**
**T90-A230X**
**3-Electrode-Arrester**
**Ordering code: B88069X6700C253**

DC spark-over voltage <sup>1) 2) 3)</sup>	184 ... 276	V
DC spark-over voltage <sup>2) 4)</sup>	176 ... 550	V
Impulse spark-over voltage at 100 V/μs    - for 99 % of measured values <sup>3)</sup> - for 50 % of measured values <sup>3)</sup>	< 650 < 550	V V
at 1 kV/μs    - for 99 % of measured values <sup>3)</sup> - for 50 % of measured values <sup>3)</sup>	< 800 < 700	V V
Insulation resistance at 100 V <sub>dc</sub> <sup>3)</sup>	> 1	GΩ
Capacitance at 1 MHz <sup>3)</sup>	< 1.5	pF
Impulse life 300 operations    10/1000 μs <sup>5)</sup>	200	A
Nominal impulse discharge current 10 operations    8/20 μs <sup>5)</sup> 10 operations    8/20 μs <sup>6)</sup>	5 5	kA kA
Nominal alternating discharge current 10 operations    50 Hz; 1 s <sup>5)</sup> 10 operations    50 Hz; 1 s <sup>6)</sup>	5 5	A <sub>rms</sub> A <sub>rms</sub>
DC holdover voltage <sup>8)</sup> at 52 V <sub>dc</sub> / 260 Ω at 80 V <sub>dc</sub> / 330 Ω at 135 V <sub>dc</sub> / 1300 Ω	< 150 < 150 < 150	ms ms ms
Activation after reflow soldering <sup>7)</sup> 1 operation    U <sub>RMS</sub> = 600 V; 1 s	2	A
Weight	~ 0.8	g
Storage temperature	-40 ... +90	°C
Climatic category (IEC 60068-1)	40/ 90/ 21	
Marking, blue	<b>EPCOS</b> <b>230 YY O</b> 230    - Nominal voltage YY    - Year of production O    - Non radioactive	

<sup>1)</sup> At delivery AQL 0.65 level II, DIN ISO 2859

<sup>2)</sup> In ionized mode

<sup>3)</sup> Tip or ring electrode to center electrode

<sup>4)</sup> Tip to ring electrode


<sup>5)</sup> Total current through center electrode, half value through tip respectively ring electrode

<sup>6)</sup> Total current through center electrode, same value through tip respectively ring electrode

<sup>7)</sup> Total current from ring to tip electrode

<sup>8)</sup> Test in accordance with ITU-T Rec. K.12

Terms in accordance with ITU-T Rec. K.12 and DIN 57845/VDE 0845

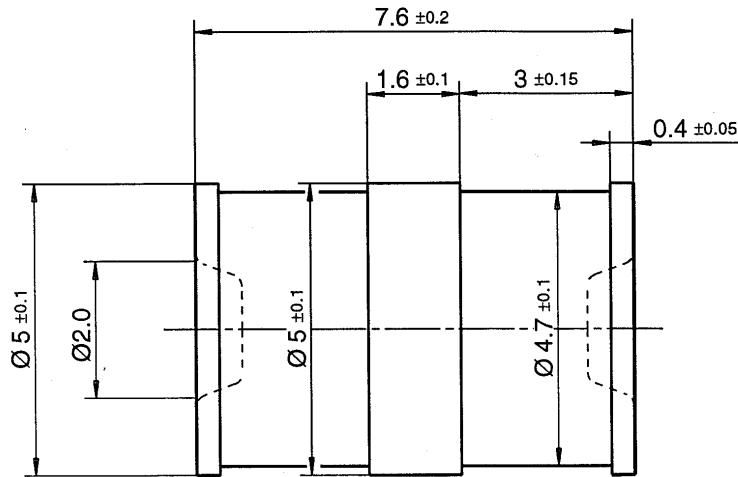

Oberfläche verzinnnt /  
surface tin-plated

*Not to scale*

*Dimensions in mm*

*Non controlled document*

© EPCOS AG 2002. Reproduction, publication and dissemination of this data sheet, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.