

**M3 SERIES**
**P10CU-XXXXE 1KV ISOLATED 2W UNREGULATED SINGLE OUTPUT SIP7**
**Available Inputs:**
**5, 12, 24 and 48 VDC**
**Available Outputs:**
**5, 7.2, 12 and 15 VDC**

Other specifications please enquire

**Electrical Specifications**

(Typical at + 25° C, nominal input voltage, rated output current unless otherwise specified)

**Input Specifications**

 Voltage range +/- 10 %  
 Filter Capacitors

**Isolation Specifications**

 Rated voltage 1000 VDC  
 Leakage current 1 mA  
 Resistance  $10^9$  Ohm  
 Capacitance 60 pF typ.

**Output Specifications**

 Voltage accuracy +/- 5 %, max.  
 Ripple and noise (at 20 MHz BW) 75 mV p-p, max.  
 Short circuit protection Momentary  
 Line voltage regulation +/- 1,2 % / 1,0 % of  $V_{in}$   
 Load voltage regulation +/- 8 %, load = 20 ~ 100 %  
 Temperature coefficient +/- 0,02 % / °C

**General Specifications**

 Efficiency 70 % to 85 %  
 Switching frequency 85 KHz, typ.

**Environmental Specifications**

 Operating temperature (ambient) - 40° C to + 85° C  
 Storage temperature - 55 °C to + 125 °C  
 Derating See graph  
 Humidity Up to 90 %, non condensing  
 Cooling Free air convection


**Physical Characteristics**

 Dimensions SIP 19,50 x 6,00 x 9,50 mm  
 0,76 x 0,24 x 0,37 inches  
 Weight 2,5 g 3,5 g for 48 VDC  
 Case material Non conductive black plastic


**Examples of Partnumbers/Modelcode**

PART NO.	INPUT VOLTAGE (VDC)	INPUT CURRENT NO LOAD	INPUT CURRENT FULL LOAD	OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT (max. mA)	EFFICIENCY FULL LOAD (% TYP.)
P10CU-0505E	5	28	555	5	400	72
P10CU-0512E	5	28	500	12	167	80
P10CU-1205E	12	22	228	5	400	73
P10CU-1212E	12	20	208	12	167	80
P10CU-2405E	24	10	113	5	400	74
P10CU-2412E	24	9	101	12	167	82

**Dimensions**

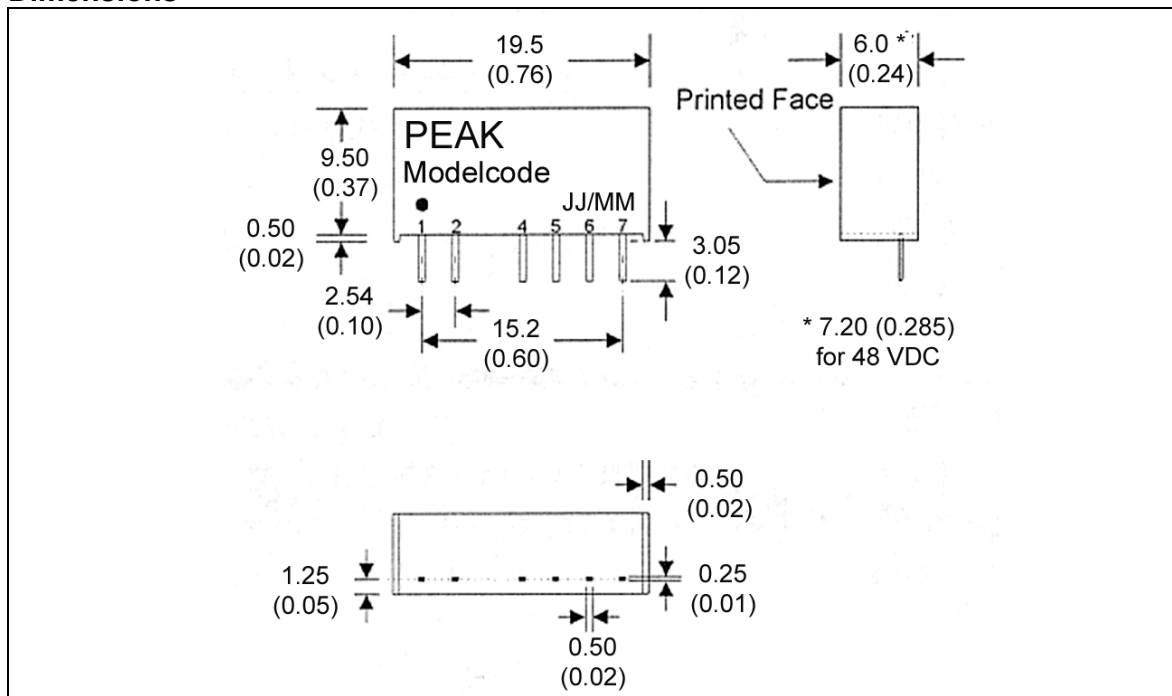

**Derating Graph and Pinning**

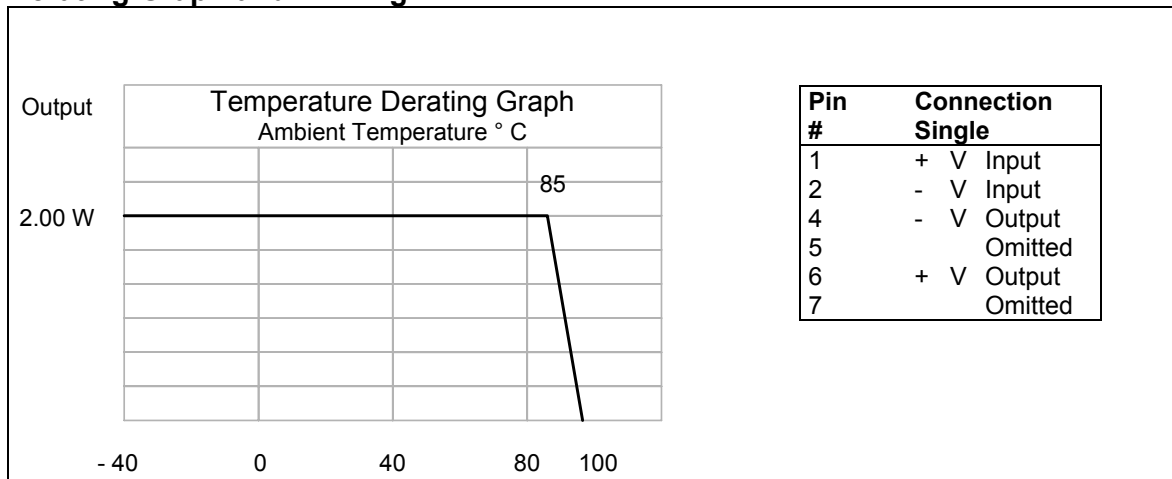

Specification can be changed without notice.

Copyright PEAK electronics GmbH

REV:2 / 09.2001