

M3 SERIES
P10LU-XXXXZ 3KV ISOLATED 2W UNREGULATED DUAL OUTPUT SIP7
Available Inputs:
5, 12, 24 and 48 VDC
Available Outputs:
(+/-) 5, 7.2, 12 and 15 VDC

Other specifications please enquire

Electrical Specifications

(Typical at + 25° C, nominal input voltage, rated output current unless otherwise specified)

Input Specifications

 Voltage range +/- 10 %
 Filter Capacitors

Isolation Specifications

 Rated voltage 3000 VDC
 Leakage current 1 mA
 Resistance 10⁹ Ohm
 Capacitance 60 pF typ.

Output Specifications

 Voltage accuracy +/- 5 %, max.
 Ripple and noise (at 20 MHz BW) 75 mV p-p, max.
 Short circuit protection Momentary
 Line voltage regulation +/- 1,2 % / 1,0 % of Vin
 Load voltage regulation +/- 8 %, load = 20 ~ 100 %
 Temperature coefficient +/- 0,02 % / °C

General Specifications

 Efficiency 70 % to 85 %
 Switching frequency 85 KHz, typ.

Environmental Specifications

 Operating temperature (ambient) - 40° C to + 85° C
 Storage temperature - 55 °C to + 125 °C
 Derating See graph
 Humidity Up to 90 %, non condensing
 Cooling Free air convection


Physical Characteristics

 Dimensions SIP 19,50 x 6,00 x 9,50 mm
 0,76 x 0,24 x 0,37 inches
 Weight 2,5 g 3,5 g for 48 VDC
 Case material Non conductive black plastic


Examples of Partnumbers/Modelcode

| PART NO. | INPUT VOLTAGE (VDC) | INPUT CURRENT NO LOAD | INPUT CURRENT FULL LOAD | OUTPUT VOLTAGE (VDC) | OUTPUT CURRENT (max. mA) | EFFICIENCY FULL LOAD (% TYP.) |
|--------------|---------------------|-----------------------|-------------------------|----------------------|--------------------------|-------------------------------|
| P10LU-0505Z | 5 | 28 | 555 | +/- 5 | +/- 200 | 72 |
| P10LU-0512Z | 5 | 26 | 500 | +/- 12 | +/- 84 | 80 |
| P10LU-0515Z | 5 | 25 | 494 | +/- 15 | +/- 67 | 81 |
| P10LU-1205Z | 12 | 22 | 225 | +/- 5 | +/- 200 | 74 |
| P10LU-1212Z | 12 | 20 | 208 | +/- 12 | +/- 84 | 80 |
| P10LU-1215Z | 12 | 20 | 208 | +/- 15 | +/- 67 | 80 |
| P10LU-2405Z | 24 | 11 | 111 | +/- 5 | +/- 200 | 75 |
| P10LU-247R2Z | 24 | 10 | 107 | +/- 7,2 | +/- 139 | 78 |
| P10LU-2412Z | 24 | 8 | 102 | +/- 12 | +/- 84 | 81 |
| P10LU-2415Z | 24 | 8 | 102 | +/-15 | +/- 67 | 82 |

Dimensions

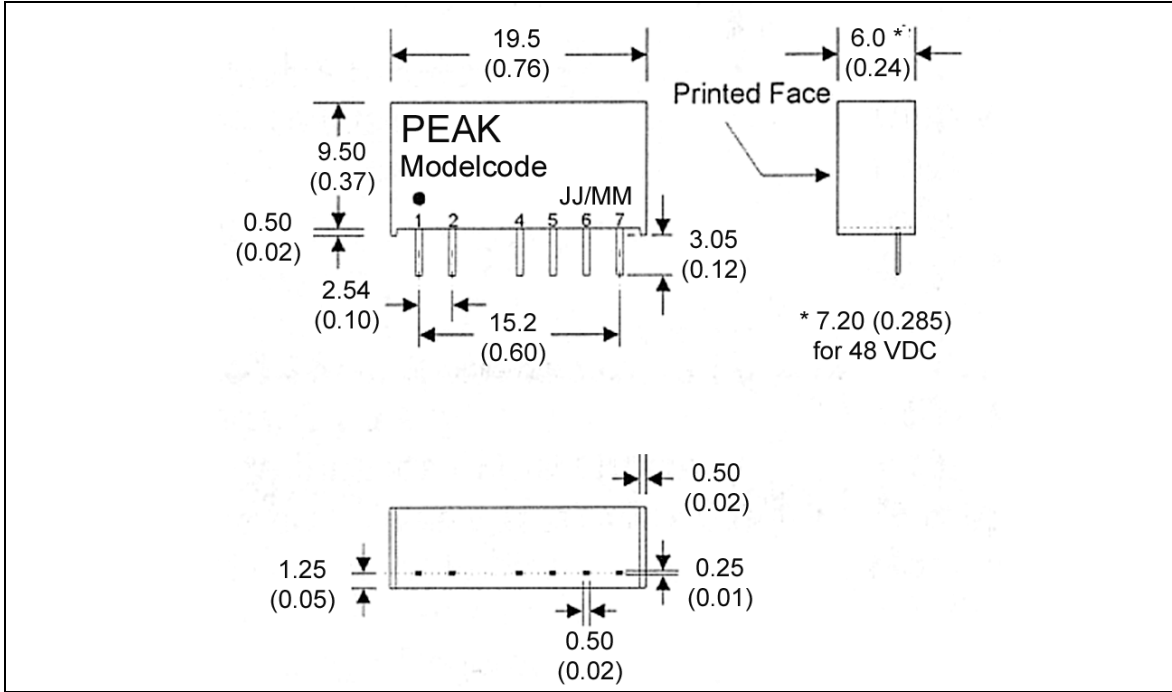

Derating Graph and Pinning

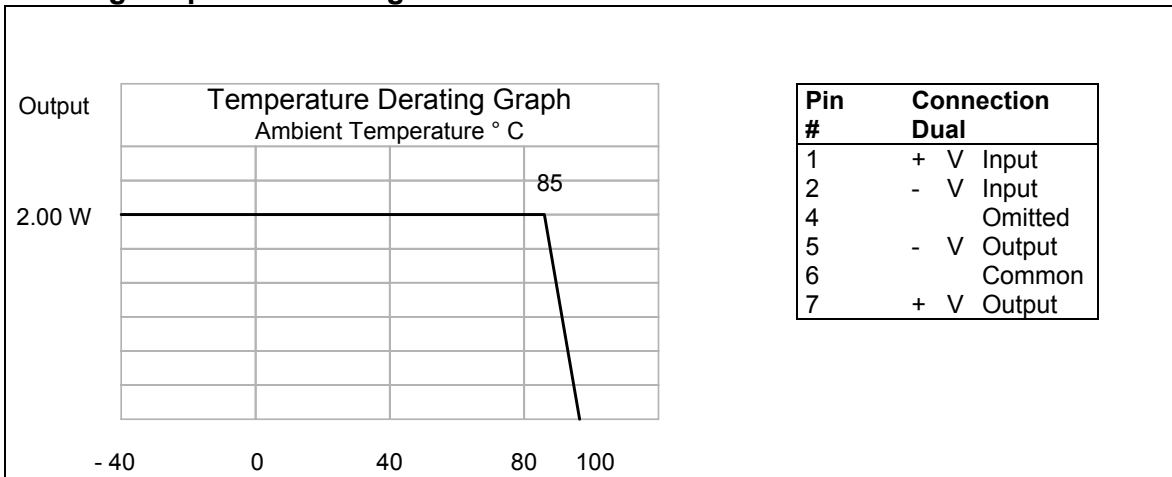

Specification can be changed without notice.

Copyright PEAK electronics GmbH

REV:2 / 09.2001