

<b>GLASS PASSIVATED BRIDGE RECTIFIERS</b>	<p>REVERSE VOLTAGE - <b>50 to 1000</b>Volts FORWARD CURRENT - <b>6.0</b> Amperes</p>
<p><b>FEATURES</b></p> <ul style="list-style-type: none"> <li>● Surge overload rating -150 amperes peak</li> <li>● Low forward voltage drop</li> <li>● Small size; simple installation</li> <li>● Sliver plated copper leads</li> <li>● Mounting position: Any</li> </ul>	<p style="text-align: center;">Polarity shown on side of case, Positive lead by beveled corner. Dimensions in inches and (milimeters)</p>

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.


Single phase, half wave ,60Hz, resistive or inductive load.

For capacitive load, derate current by 20%


CHARACTERISTICS	SYMBOL	BR6005G	BR601G	BR602G	BR604G	BR606G	BR608G	BR610G	UNIT
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	v
Maximum RMS Bridge Input Voltage	V <sub>RMS</sub>	30	70	140	280	420	560	700	v
Maximum Average Forward Rectified Output Current at T <sub>c</sub> =100°C (Note1) T <sub>A</sub> =50°C (Note2)	I <sub>(AV)</sub>	6.0 3.0							A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load	I <sub>FSM</sub>	150							A
Maximum Forward Voltage Drop Per Bridge Element at 3.0A Peak	V <sub>F</sub>	1.1							V
Maximum Reverse Current at Rated DC Blocking Voltage Per Element T <sub>A</sub> =25°C T <sub>A</sub> =100°C	I <sub>R</sub>	10.0 1.0							uA mA
Operating Temperature Range	T <sub>J</sub>	-55 to +150							°C
Storage Temperature Range	T <sub>STG</sub>	-55 to +150							°C

Notes:1. Unit mounted on metal chassis  
2. Unit mounted on P.C. board


**FIG.1-DERATING CURVE FOR  
OUTPUT RECTIFIED CURRENT**

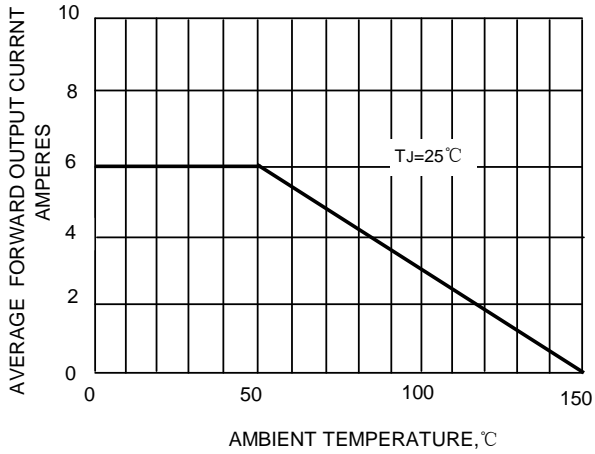

**FIG.2-TYPICAL REVERSE  
CHARACTERISTICS**

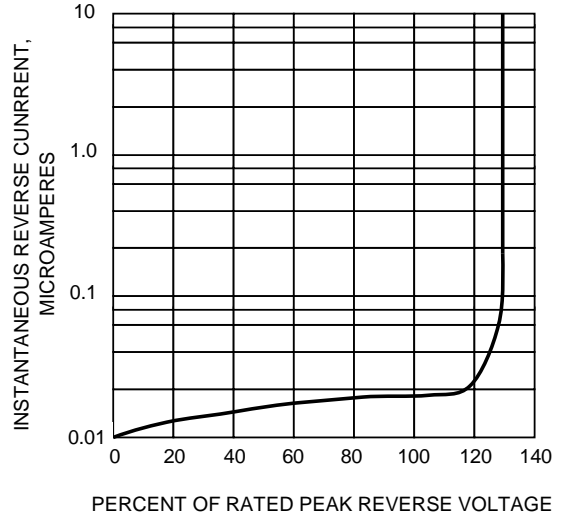

**FIG.3-MAXIMUM FORWARD SURGE CURRENT**

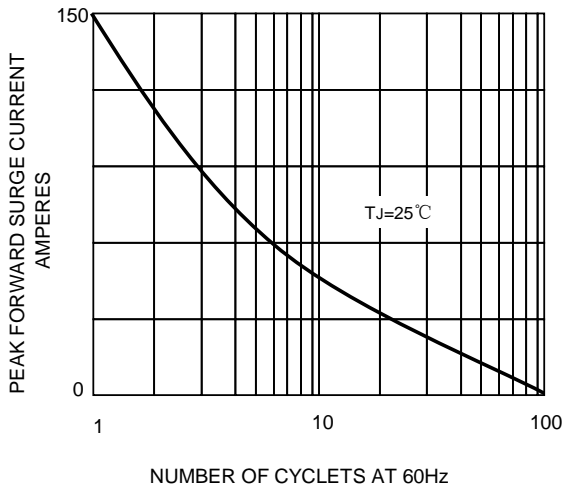

**FIG.4-TYPICAL INSTANTANEOUS  
FORWARD CHARACTERISTICS**

