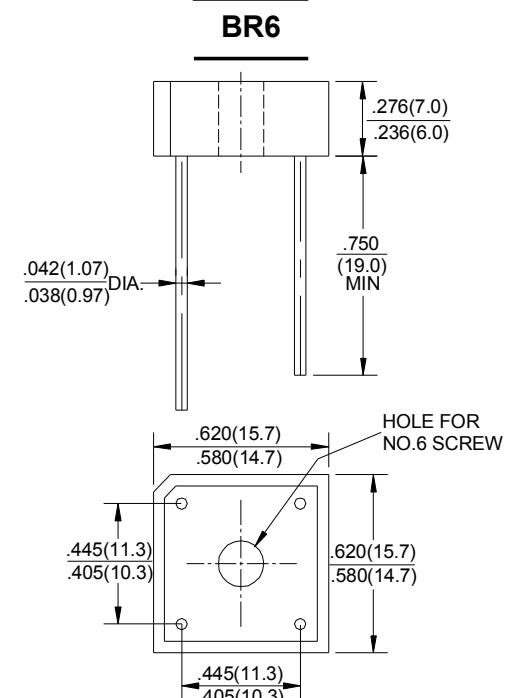


<b>SILICON BRIDGE RECTIFIERS</b>	<p>REVERSE VOLTAGE - <b>50 to 1000Volts</b>          FORWARD CURRENT - <b>6.0 Amperes</b></p>
<p><b>FEATURES</b></p> <ul style="list-style-type: none"> <li>● Surge overload rating -175 amperes peak</li> <li>● Low forward voltage drop</li> <li>● Small size; simple installation</li> <li>● Sliver plated copper leads</li> <li>● Mounting position: Any</li> </ul>	 <p style="text-align: center;">Polarity shown on side of case, Positive lead by beveled corner.          Dimensions in inches and (millimeters)</p>

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Rating at 25°C ambient temperature unless otherwise specified.  
 Single phase, half wave ,60Hz, resistive or inductive load.  
 For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	BR6005	BR601	BR602	BR604	BR606	BR608	BR610	UNIT	
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	v	
Maximum RMS Bridge Input Voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	v	
Maximum Average Forward Rectified Output Current at T <sub>c</sub> =100°C (Note1) T <sub>A</sub> =50°C (Note2)	I <sub>(AV)</sub>					6.0				A
Peak Forward Surage Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load	I <sub>FSM</sub>					175				A
Maximum Forward Voltage Drop Per Bridge Element at 3.0A Peak	V <sub>F</sub>					1.0				V
Maximum Reverse Current at Rated DC Blocking Voltage Per Element	I <sub>R</sub>					10.0				μA
						1.0				mA
Operating Temperature Range	T <sub>J</sub>					-55 to +125				°C
Storage Temperature Range	T <sub>STG</sub>					-55 to +125				°C

Notes:1. Unit mounted on metal chassis  
 2. Unit mounted on P.C. board

**RATING AND CHARACTERISTIC CURVES  
BR6 SERIES**

FIG.1-DERATING CURVE FOR  
OUTPUT RECTIFIED CURRENT

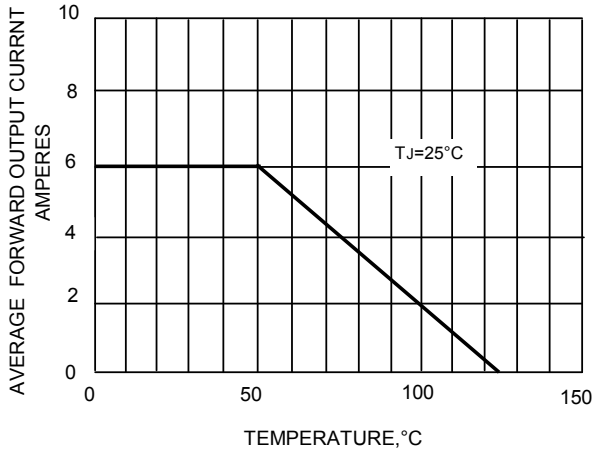


FIG.2-TYPICAL REVERSE  
CHARACTERISTICS

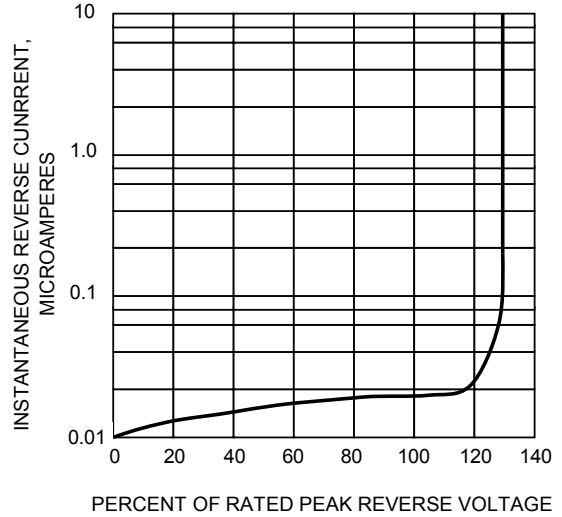


FIG.3-MAXIMUM FORWARD SURGE CURRENT

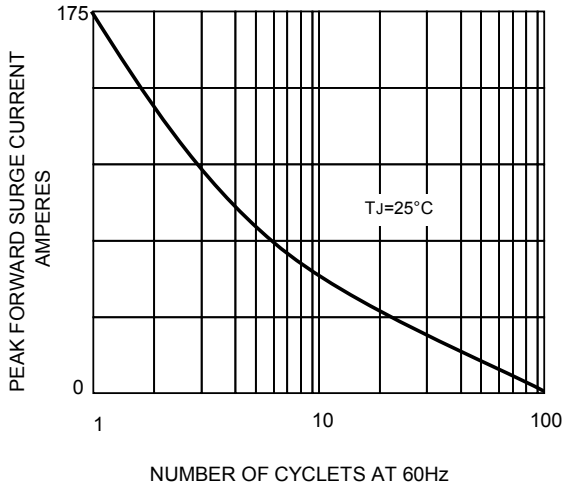


FIG.4-TYPICAL INSTANTANEOUS  
FORWARD CHARACTERISTICS

