

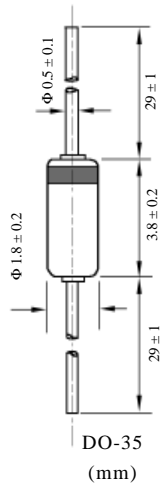
1N52 SERIES ZENER DIODES

1N52 系列稳压二极管

1N52 SERIES ZENER DIODES

1N5221B Through 1N5272B ELECTRICAL CHARACTERISTICS 电性参数

($T_A=25^{\circ}\text{C}$) unless otherwise noted. Based on dc measurements at thermal equilibrium; lead length=3/8"; thermal resistance of heat sink=30°C/W $V_{Fmax}=1.1\text{V}$ @ $I_F=200\text{mA}$ for all types ($T_A=25^{\circ}\text{C}$ 所有型号 $V_{Fmax}=1.1\text{V}$ @ $I_F=200\text{mA}$ 。其它特别说明除外。)

型号 TYPE	稳压值 Nominal Zener Voltage $V_Z @ I_{ZT}$ Volts	测试电流 Test Current I_{ZT} mA	最大动态阻抗 Max Zener Impedance A and B Suffix only		漏电流 Max Reverse Leakage Current		温度系数 Max Zener Voltage Temperature Coff (A and B suffix only) $V_Z(\%/^{\circ}\text{C})$	外型尺寸 Package Dimensions	
			$Z_{ZT} @ I_{ZT}$ Ohms	$Z_{ZK} @ I_{ZK}$ = 0.25mA Ohms	I_R μA	V_R Volts B			
1N5221B	2.4	20	30	1200	100	1.0	-0.085	 <p style="text-align: center;">DO-35 (mm)</p>	
1N5222B	2.5		30	1250	100		-0.085		
1N5223B	2.7		30	1300	75		-0.08		
1N5224B	2.8		30	1400	75		-0.08		
1N5225B	3.0		29	1600	50		-0.075		
1N5226B	3.3	20	28	1600	25	1.0	-0.07		
1N5227B	3.6		24	1700	15		-0.065		
1N5228B	3.9		23	1900	10		-0.06		
1N5229B	4.3		22	2000	5.0		± 0.055		
1N5230B	4.7		19	1900	5.0		2.0		± 0.03
1N5231B	5.1	20	17	1600	5.0	2.0	± 0.03		
1N5232B	5.6		11	1600	5.0		3.0		+0.038
1N5233B	6.0		7.0	1600	5.0		3.5		+0.038
1N5234B	6.2		7.0	1000	5.0		4.0		+0.045
1N5235B	6.8		5.0	750	3.0		5.0		+0.05
1N5236B	7.5	20	6.0	500	3.0	6.0	+0.058		
1N5237B	8.2		8.0	500			6.5		+0.062
1N5238B	8.7		8.0	600			6.5		+0.065
1N5239B	9.1		10	600			7.0		+0.068
1N5240B	10		17	600			8.0		+0.075
1N5241B	11	20	22	600	2.0	8.4	+0.076		
1N5242B	12	20	30		1.0	9.1	+0.077		
1N5243B	13	9.5	13		0.5	9.9	+0.079		
1N5244B	14	9.0	15		0.1	10	+0.082		
1N5245B	15	8.5	16		0.1	11	+0.082		
1N5246B	16	7.8	17	600	0.1	14	+0.083		
1N5247B	17	7.4	19				+0.084		
1N5248B	18	7.0	21				+0.085		
1N5249B	19	6.6	23				+0.086		
1N5250B	20	6.2	25				15	+0.086	
1N5251B	22	5.6	29	600	0.1	19	+0.087		
1N5252B	24	5.2	33				+0.088		
1N5253B	25	5.0	35				+0.089		
1N5254B	27	4.6	41				+0.090		
1N5255B	28	4.5	44				+0.091		

NOTE: The V_Z value shown is the center value with tolerance designations

注: V_Z 为稳压中心值, 其中 B 档 V_Z 容差 $\pm 5\%$
C 档 V_Z 容差 $\pm 2\%$
D 档 V_Z 容差 $\pm 1\%$

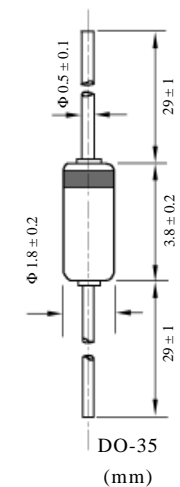
as follows:

suffix B: $V_Z \pm 5\%$
suffix C: $V_Z \pm 2\%$
suffix D: $V_Z \pm 1\%$

1N52 系列稳压二极管

1N52 SERIES ZENER DIODES

1N5221B Through 1N5272B ELECTRICAL CHARACTERISTICS 电性参数
 ($T_A=25^{\circ}\text{C}$) unless otherwise noted. Based on dc measurements at thermal equilibrium; lead length=3/8"; thermal resistance of heat sink=30°C/W $V_{Fmax}=1.1\text{V}$ @ $I_F=200\text{mA}$ for all types ($T_A=25^{\circ}\text{C}$ 所有型号 $V_{Fmax}=1.1\text{V}$ @ $I_F=200\text{mA}$ 。其它特别说明除外。)

型号 TYPE	稳压值 Nominal Zener Voltage $V_Z @ I_{ZT}$ Volts	测试电流 Test Current I_{ZT} mA	最大动态阻抗 Max Zener Impedance A and B Suffix only		漏电流 Max Reverse Leakage Current		温度系数 Max Zener Voltage Temperature Coff (A and B suffix only) $V_Z / (\% / ^{\circ}\text{C})$	外型尺寸 Package Dimensions
			$Z_{ZT} @ I_{ZT}$ Ohms	$Z_{ZK} @ I_{ZK} = 0.25\text{mA}$ Ohms	I_R μA	V_R Volts B		
1N5256B	30	4.2	49	600	0.1	23	+0.091	 <p>DO-35 (mm)</p>
1N5257B	33	3.8	58	700		25	+0.092	
1N5258B	36	3.4	70	700		27	+0.093	
1N5259B	39	3.2	80	800		30	+0.094	
1N5260B	43	3.0	93	900		33	+0.095	
1N5261B	47	2.7	105	1000	0.1	36	+0.095	
1N5262B	51	2.5	125	1100		39	+0.096	
1N5263B	56	2.2	150	1300		43	+0.096	
1N5264B	60	2.1	170	1400		46	+0.097	
1N5265B	62	2.0	185	1400		47	+0.097	
1N5266B	68	1.8	230	1600	0.1	52	+0.097	
1N5267B	75	1.7	270	1700		56	+0.098	
1N5268B	82	1.5	330	2000		62	+0.098	
1N5269B	87	1.4	370	2200		68	+0.099	
1N5270B	91	1.4	400	2300		69	+0.099	
1N5271B	100	1.3	500	2600	0.1	76	+0.110	
1N5272B	110	1.1	750	3000		84	+0.110	

NOTE: The V_Z value shown is the center value with tolerance designations as follows:

suffix B: $V_Z \pm 5\%$
 suffix C: $V_Z \pm 2\%$
 suffix D: $V_Z \pm 1\%$

注: V_Z 为稳压中心值, 其中 B 档 V_Z 容差 $\pm 5\%$
 C 档 V_Z 容差 $\pm 2\%$
 D 档 V_Z 容差 $\pm 1\%$