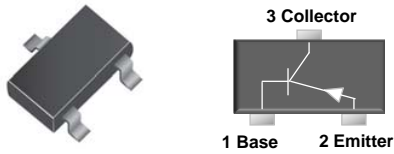
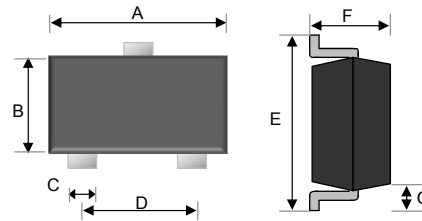


**Small Signal Transistor**
**SOT-23**

**Features**

- ↳ Epitaxial planar die construction
- ↳ Surface device type mounting
- ↳ Moisture sensitivity level 1
- ↳ Matte Tin(Sn) lead finish with Nickel(Ni) underplate
- ↳ Pb free version and RoHS compliant
- ↳ Green compound (Halogen free) with suffix "G" on packing code and prefix "G" on date code

**Mechanical Data**


- ↳ Case : SOT- 23 small outline plastic package
- ↳ Terminal: Matte tin plated, lead free., solderable per MIL-STD-202, Method 208 guaranteed
- ↳ High temperature soldering guaranteed: 260°C/10s
- ↳ Weight : 0.008gram (approximately)
- ↳ Marking Code : 2F



Dimensions	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	2.80	3.00	0.110	0.118
B	1.20	1.40	0.047	0.055
C	0.30	0.50	0.012	0.020
D	1.80	2.00	0.071	0.079
E	2.25	2.55	0.089	0.100
F	0.90	1.20	0.035	0.043
G	0.550	REF	0.022	REF

**Ordering Information**

Package	Part No.	Packing	Marking
SOT-23	MMBT2907A RF	3K / 7" Reel	2F
SOT-23	MMBT2907A RFG	3K / 7" Reel	2F

**Suggested PAD Layout**

**Maximum Ratings and Electrical Characteristics**

Rating at 25°C ambient temperature unless otherwise specified.

**Maximum Ratings**

Type Number	Symbol	Value	Units
Power Dissipation	$P_D$	350	mW
Collector-Base Voltage	$V_{CBO}$	-60	V
Collector-Emitter Voltage	$V_{CEO}$	-60	V
Emitter-Base Voltage	$V_{EBO}$	-5	V
Collector Current	$I_C$	-600	mA
Junction and Storage Temperature Range	$T_J, T_{STG}$	-55 to + 150	°C


Notes:1. Valid provided that electrodes are kept at ambient temperature

Small Signal Transistor

Electrical Characteristics

Type Number	Symbol	Min	Max	Units
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	-60	-	V
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	-60	-	V
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	-5	-	V
Collector Cut-off Current	$I_{CBO}$	-	-20	nA
Collector Cut-off Current	$I_{CEX}$	-	-50	nA
Base Cut-off Current	$I_B$	-	-50	nA
DC current gain	$h_{FE}$	75	-	
	$h_{FE}$	100	-	
	$h_{FE}$	100	-	
	$h_{FE}$	100	300	
	$h_{FE}$	50	-	
Collector-Emitter saturation voltage	$V_{CE(sat)}$	-	-0.4	V
Base-Emitter saturation voltage	$V_{BE(sat)}$	-	-1.3	V
Transition frequency	$f_T$	200	-	MHz
Output Capacitance	$C_{obo}$	-	8.0	pF
Input Capacitance	$C_{ibo}$	-	30	pF
Delay time	$t_d$	-	10	nS
Rise time	$t_r$	-	40	nS
Storage time	$t_s$	-	80	nS
Fall time	$t_f$	-	30	nS

Tape & Reel specification

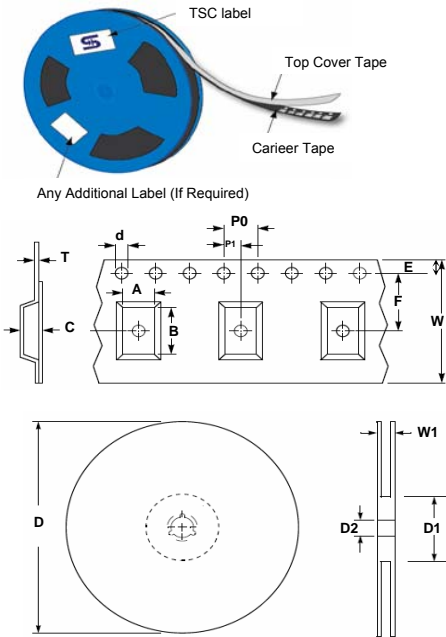

Item	Symbol	Dimension(mm)
Carrier width	A	3.15 ±0.10
Carrier length	B	2.77 ±0.10
Carrier depth	C	1.22 ±0.10
Sprocket hole	d	1.50 ±0.10
Reel outside diameter	D	178 ± 1
Reel inner diameter	D1	55 Min
Feed hole width	D2	13.0 ± 0.20
Sprocket hole position	E	1.75 ±0.10
Punch hole position	F	3.50 ±0.05
Sprocket hole pitch	P0	4.00 ±0.10
Embossment center	P1	2.00 ±0.05
Overall tape thickness	T	0.229 ±0.013
Tape width	W	8.10 ±0.20
Reel width	W1	12.30 ±0.20

**Small Signal Transistor**

**Rating and Characteristic Curves**

