

RGPP15A THRU RGPP15M

**GLASS PASSIVATED
FAST RECOVERY RECTIFIER**
VOLTAGE:50 TO 1000V CURRENT: 1.5A




FEATURE

Molded case feature for auto insertion
High current capability
Low leakage current
Fast switching capability
High temperature soldering guaranteed
250°C /10sec/0.375" lead length at 5 lbs tension
Glass Passivated chip

MECHANICAL DATA

Terminal: Plated axial leads solderable per MIL-STD 202E, method 208C
Case: Molded with UL-94 Class V-0 recognized Flame Retardant Epoxy
Polarity: color band denotes cathode
Mounting position: any

DO-15\DO-204AC

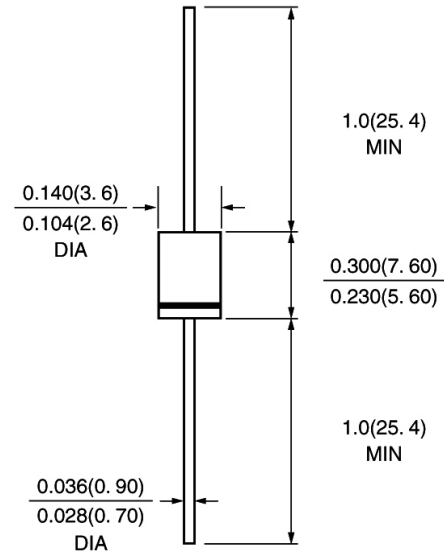

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(single-phase, half-wave, 60HZ, resistive or inductive load rating at 25°C, unless otherwise stated)

	SYMBOL	RGPP 15A	RGPP 15B	RGPP 15D	RGPP 15G	RGPP 15J	RGPP 15K	RGPP 15M	units
Maximum Recurrent Peak Reverse Voltage	V _{rrm}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{rms}	35	70	140	280	420	560	700	V
Maximum DC blocking Voltage	V _{dc}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current 3/8"lead length at Ta =55°C	I _{f(av)}	1.5							A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load	I _{fsm}	50.0							A
Maximum Forward Voltage at rated Forward Current and 25°C	V _f	1.3							V
Maximum full load reverse current full cycle average at 55°C Ambient	I _{r(av)}	100.0							μA
Maximum DC Reverse Current Ta =25°C at rated DC blocking voltage Ta =150°C	I _r	5.0 200							μA μA
Maximum Reverse Recovery Time (Note 1)	T _{rr}	150			250		500		nS
Typical Junction Capacitance (Note 2)	C _j	25.0							pF
Typical Thermal Resistance (Note 3)	R(ja)	45.0							°C /W
Storage and Operating Junction Temperature	T _{stg} , T _j	-50 to +150							°C

Note:







1. Reverse Recovery Condition I_f =0.5A, I_r =1.0A, I_{rr} =0.25A
2. Measured at 1.0 MHz and applied reverse voltage of 4.0Vdc
3. Thermal Resistance from Junction to Ambient at 3/8"lead length, P.C. Board Mounted

Rev.1

www.gulfsemi.com

RATINGS AND CHARACTERISTIC CURVES RGPP15A THRU RGPP15M

1

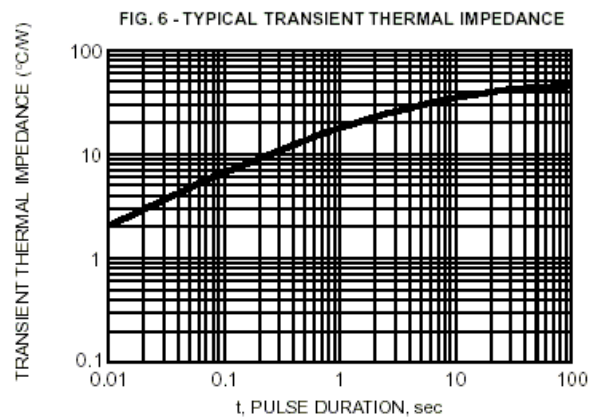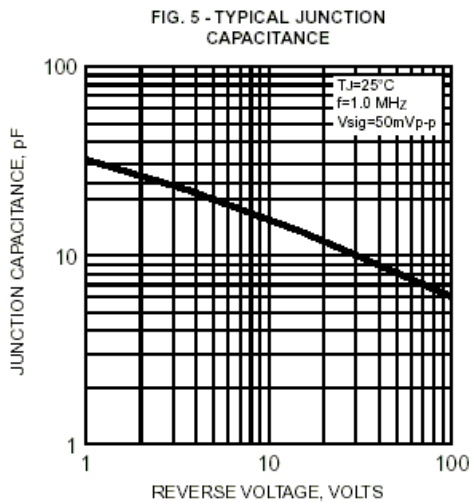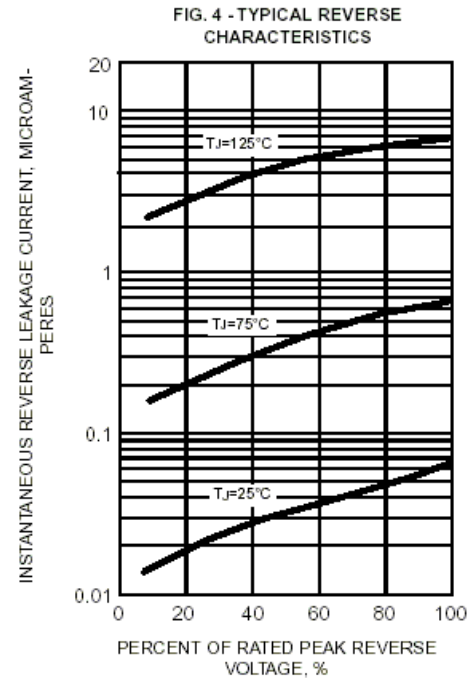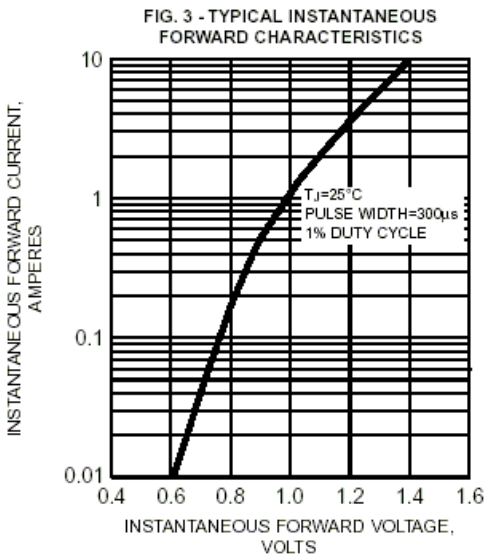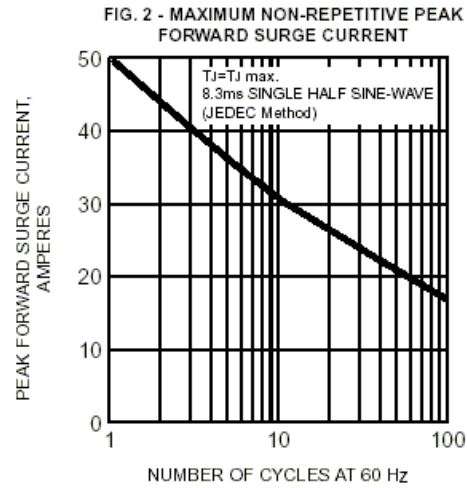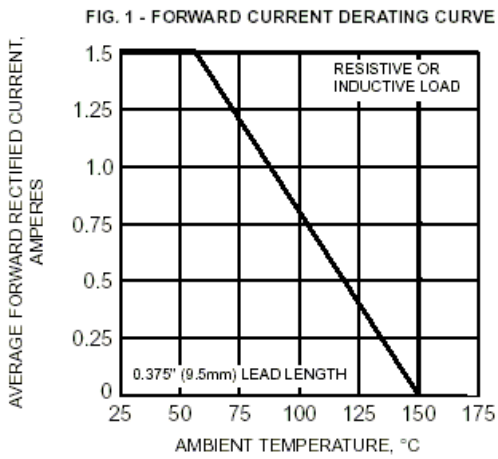

¹ Rev.1