



ANATECH ELECTRONICS, INC.

Manufacturer of RF & Microwave Products



481-491 MHz Saw Duplexer

P/N: AM481-491SD334

Tx → Ant		Specifications		
Parameters Description	Condition [MHz]	Minimum	Typical	Maximum
Insertion Loss	4792 ~ 483.5	-	2.2 dB	2.8 dB
VSWR	4792 ~ 483.5	-	1.4	2.1 dB
Absolute Attenuation	0.3 ~ 467	25 dB	27 dB	-
	489 ~ 493.5	30 dB	50 dB	-
	493.5 ~ 1400.0	23 dB	27 dB	-
	1400.0 ~ 2000.0	10 dB	17 dB	-
Ant → Rx		Specifications		
Parameters Description	Condition [MHz]	Minimum	Typical	Maximum
Insertion Loss	489 ~ 493.5	-	2.7	4.3
VSWR	489 ~ 493.5	-	1.5	2.2
Absolute Attenuation	0.3 ~ 479	20 dB	25 dB	-
	479 ~ 483.5	33 dB	50 dB	-
	515 ~ 800	25 dB	31 dB	-
	800.0 ~ 1200.0	15 dB	21 dB	-
	1200.0 ~ 2000.0	20 dB	30 dB	-
Tx → Rx		Specifications		
Parameters Description	Condition [MHz]	Minimum	Typical	Maximum
Isolation	479 ~ 483.5	35 dB	53 dB	-
	489 ~ 493.5	32 dB	50 dB	-
Parameters Description		Minimum	Typical	Maximum
Operation Temperature Range		-30°C	-	+80°C
Storage Temperature Range		-40°C	-	+85°C
Maximum DC Voltage		0 V		
Maximum Input Power		1.0 W > 50000 Hours, CW tone (Ta = +50°C) W		
Input Impedance		50Ω		
Output Impedance		50Ω		
Package type & size		K2		
Length x Width		5.0 x 5.0 mm ²		
Height		1.8 mm		

ANATECH ELECTRONICS, INC., 70 Outwater Lane, Garfield, NJ 07026 Tel: (973) 772-4242 Fax: (973) 772-4646
E-Mail: sales@anatechelectronics.com Website: www.anatechelectronics.com




Our Web Store
www.amcrf.com



481-491 MHz Saw Duplexer

P/N: AM481-491SD334


Package Dimensions:

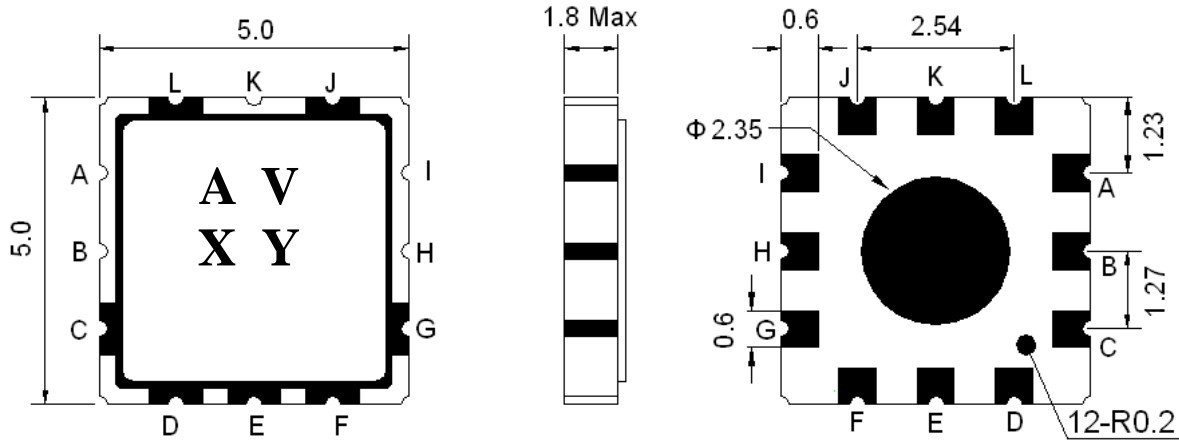

Marking Descriptions	
A	Application
V	Series Number
X	Date Code(Year)
Y	Date Code(Month)

Pin Description	
A, C, D, E, F, G, I, J, L	Ground
H	Receiver
K	Antenna
B	Transmitter

Testing Environment:

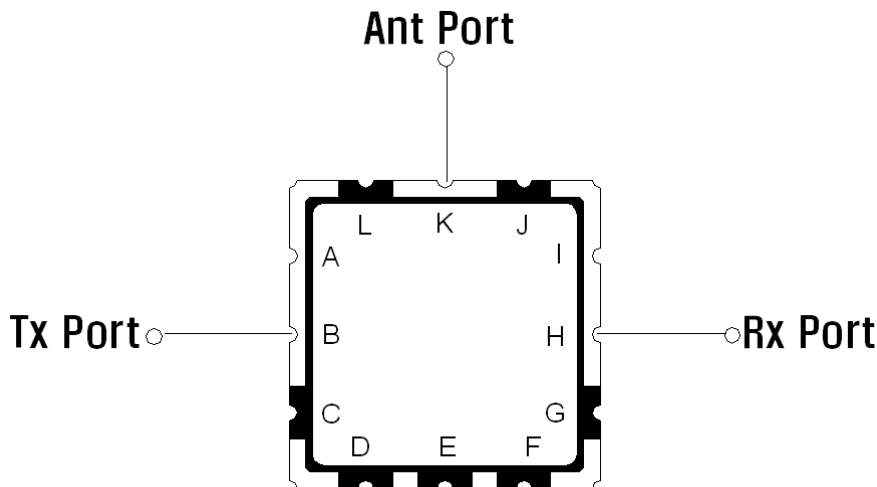




481-491 MHz Saw Duplexer


P/N: AM481-491SD334

Frequency Characteristics:

Tx to Ant, Ant to Rx

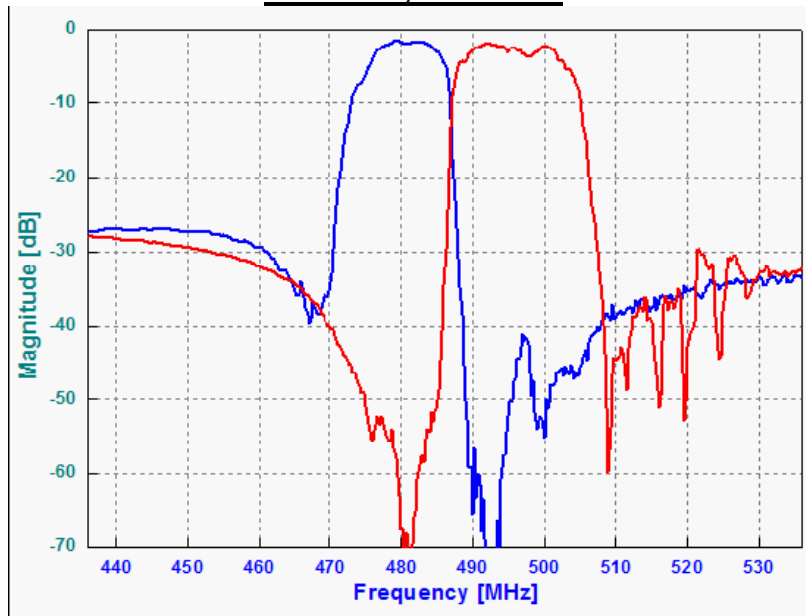

Tx to Rx Isolation

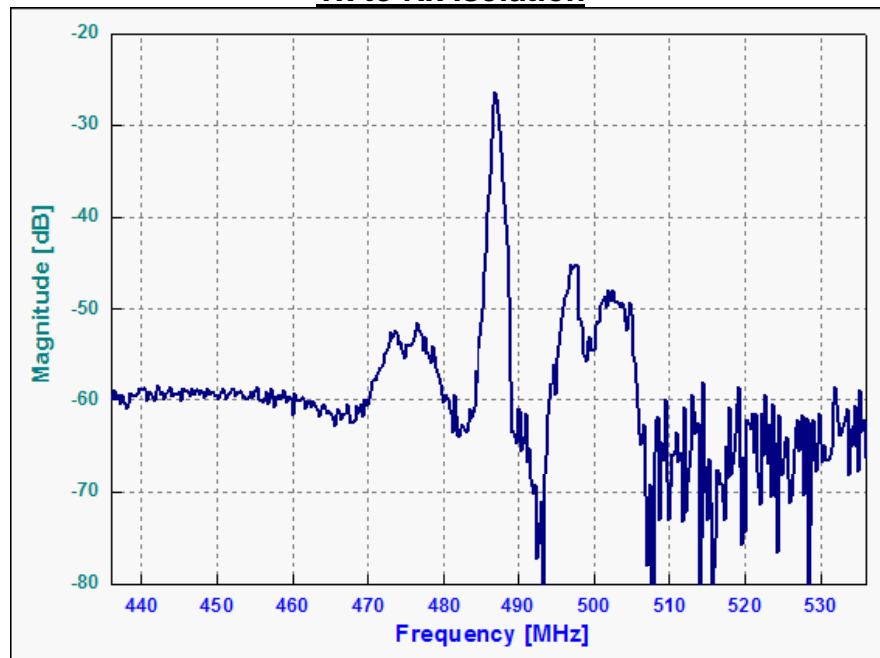





481-491 MHz Saw Duplexer

P/N: AM481-491SD334

Tx to Ant

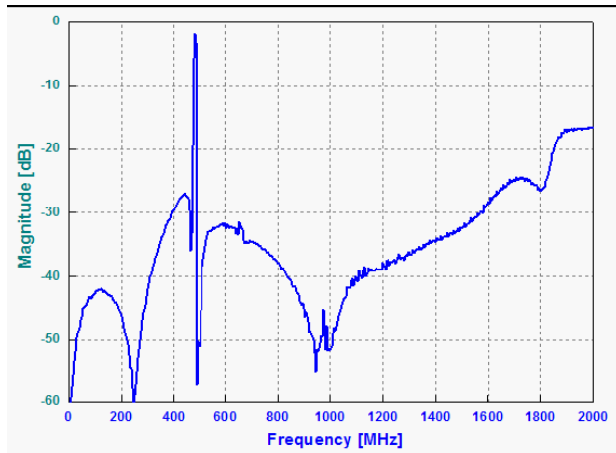


Ant to Rx

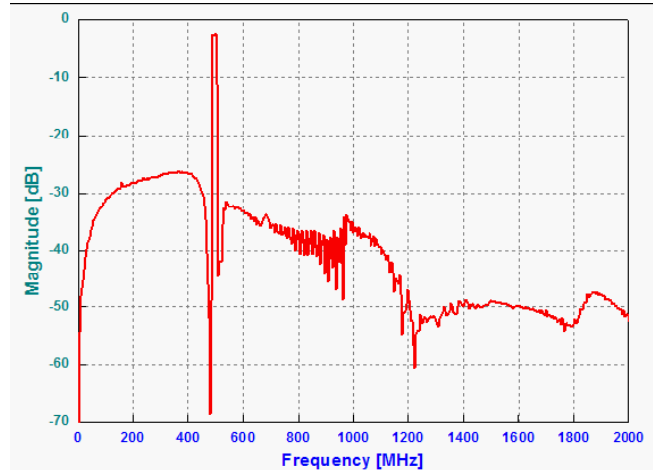


Tx Port

Smith Chart

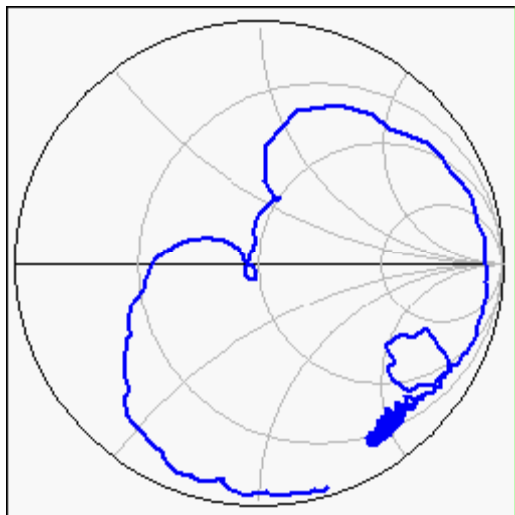

VSWR

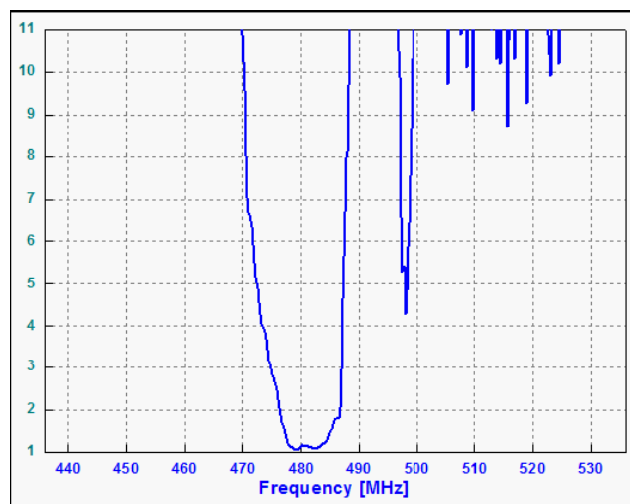




481-491 MHz Saw Duplexer


P/N: AM481-491SD334

Rx Port

Smith Chart

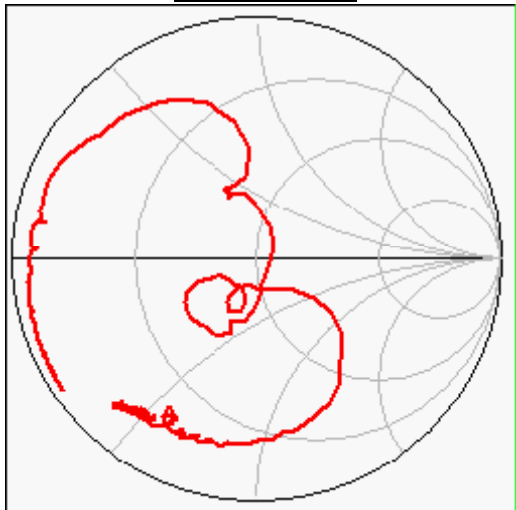


VSWR

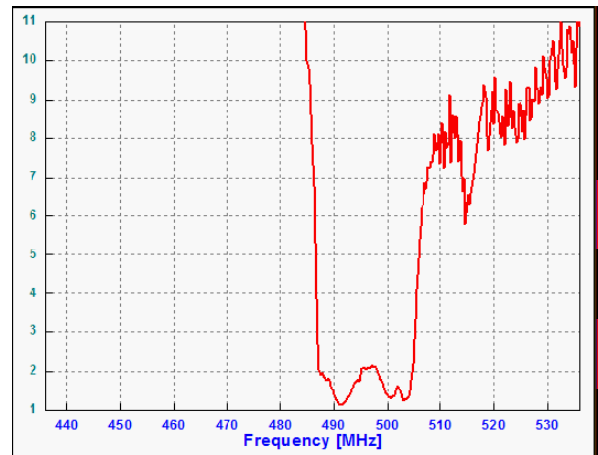

Ant Port

Smith Chart

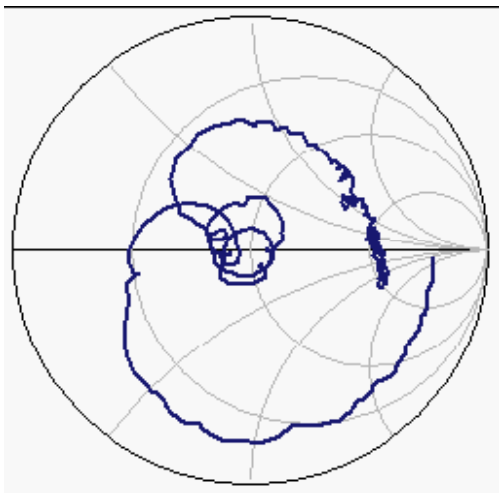

VSWR

