

FREQUENCY RANGE 10 MHz to 240 MHz  
 FREQUENCY ACCURACY @ +25 °C ± 0.0015% ( ± 15 PF)  
 FREQUENCY STABILITY Vs. TEMPERATURE See Options Below  
 OPERATING TEMPERATURE RANGE See Options Below  
 INPUT VOLTAGE ( See Note Below ) - 4.5 VDC ± 5%

INPUT CURRENT @ - 4.5 VDC 50 mA Max.


OUTPUT 100K Compatible  
 LOAD 100 Ω to - 2.0 VDC  
 SYMMETRY 60/40% @ 50% Level  
 RISE & FALL TIMES ( 10% to 90% Level ) 2 nS Max.

START-UP TIME 15 mS Max.

FREQUENCY STABILITY Vs. VOLTAGE ± 0.0002% ( ± 2 PPM ) Max.  
 (for 5% change in Voltage)

AGING @ +25 °C ± 0.0005% ( ± 5 PPM ) / year Max.

PACKAGE, SEAL & LEAD FINISH Conforms with the Requirements of MIL-PRF-55310

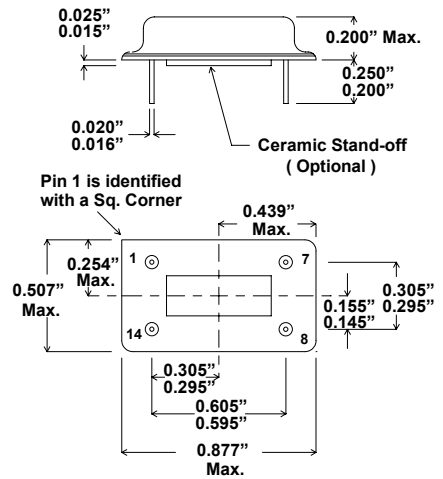


### Pin Connections

14	GND/CASE
7	-4.5 VDC
8	OUTPUT
1	N/C
All Others	MISSING

**NOTE:** For PECL applications, Xsis 300 Series ECL oscillators can be operated with +5 VDC ± 10% on Pin 14 and power supply return on Pin 7. The output logic levels will still be referenced to +5 VDC and the case will be at +5 VDC, however, 0.8 V peak to peak output signal can be AC or DC coupled as necessary.

**Contact Xsis Engineering** for special requirements such as, **Output Symmetry, Start-up Time, Frequency Accuracy, Complementary Outputs, Multiple Outputs, etc.**

### ORDERING INFORMATION ( Select from options below ) :

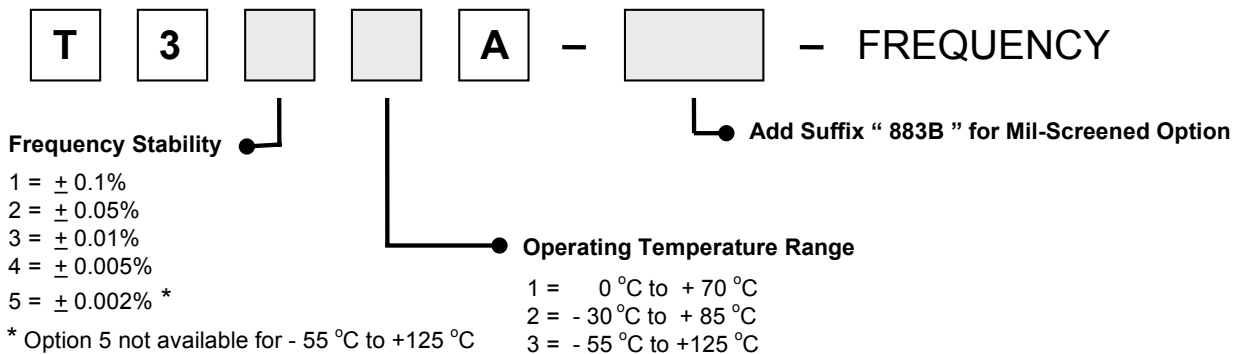

**EXAMPLE: T343A - 883B - 24.000 MHz = 14 Pin Package, 100K ECL, ± 0.0005% over -55 °C to +125 °C, Mil-Screened , and 24.000 MHz**