

# TRANSISTOR MODULE (Hi-β)

## QCA150BA60





UL;E76102 (M)

QCA150BA60 is a dual Darlington power transistor module which has series-connected **ULTRA HIGH**  $h_{FE}$ , high speed, high power Darlington transistors. Each transistor has a reverse paralleled fast recovery diode ( $t_{rr}$  : 200ns). The mounting base of the module is electrically isolated from Semiconductor elements for simple heatsink construction.

- $I_C=150A$ ,  $V_{CEX}=600V$
- Low saturation voltage for higher efficiency.
- ULTRA HIGH DC current gain  $h_{FE}$ .  $h_{FE} \geq 750$
- Isolated mounting base
- $V_{EBO}$  10V for faster switching speed.

### (Applications)

Motor Control (VVF), AC/DC Servo, UPS,  
Switching Power Supply, Ultrasonic Application

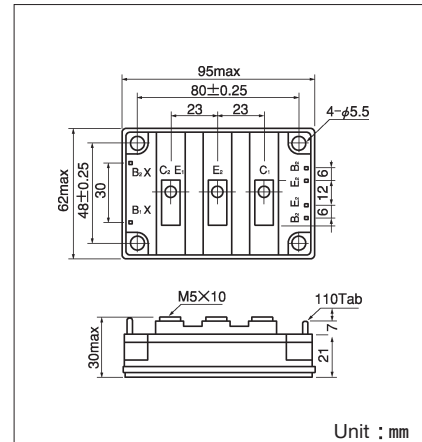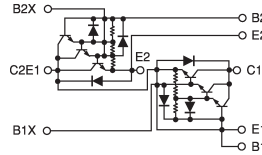

### Maximum Ratings

( $T_j=25^\circ C$ )

Symbol	Item		Conditions	Ratings		Unit
				QCA150BA60		
$V_{CBO}$	Collector-Base Voltage			600		V
$V_{CEX}$	Collector-Emitter Voltage		$V_{BE} = -2V$	600		V
$V_{EBO}$	Emitter-Base Voltage			10		V
$I_C$	Collector Current		( ) =pw≤1ms	150 (300)		A
$-I_C$	Reverse Collector Current			150		A
$I_B$	Base Current			9		A
$P_T$	Total power dissipation		$T_C = 25^\circ C$	690		W
$T_j$	Junction Temperature			-40 ~ +150		$^\circ C$
$T_{stg}$	Storage Temperature			-40 ~ +125		$^\circ C$
$V_{iso}$	Isolation Voltage		A.C.1minute	2500		V
	Mounting Torque	Mounting (M6)	Recommended Value 1.5~2.5 (15~25)	2.7 (28)		N·m (kgf·cm)
		Terminal (M5)	Recommended Value 1.5~2.5 (15~25)	2.7 (28)		
	Mass		Typical Value	370		g

### Electrical Characteristics

( $T_j=25^\circ C$ )

Symbol	Item		Conditions	Ratings			Unit
				Min.	Typ.	Max.	
$I_{CBO}$	Collector Cut-off Current		$V_{CB} = V_{CBO}$			2.0	mA
$I_{EBO}$	Emitter Cut-off Current		$V_{EB} = V_{EBO}$			600	mA
$V_{CEO(SUS)}$	Collector Emitter Sustaning Voltage		$I_C = 1A$	450		V	
$V_{CEX(SUS)}$			$I_C = 30A, I_{B2} = -5A$	600			
$h_{FE}$	D.C. Current Gain		$I_C = 150A, V_{CE} = 2.5V$	750			
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage		$I_C = 150A, I_B = 200mA$			2.5	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage		$I_C = 150A, I_B = 200mA$			3.0	V
$t_{on}$	Switching Time	On Time	$V_{CC} = 300V, I_C = 150A$ $I_{B1} = 300mA, I_{B2} = -3A$			2.0	$\mu s$
$t_s$		Storage Time				8.0	
$t_f$		Fall Time				2.0	
$V_{ECO}$	Collector-Emitter Reverse Voltage		$I_C = -150A$			1.8	V
$t_{rr}$	Reverse Recovery time		$V_{CC} = 300V, -I_C = 150A, -di/dt = 150A/\mu s, V_{BE} = -5V$	200			ns
$R_{th(j-c)}$	Thermal Impedance (junction to case)		Transistor part			0.18	$^\circ C/W$
			Diode part			0.6	

