



### 1. CONFIGURATION & DIMENSIONS :

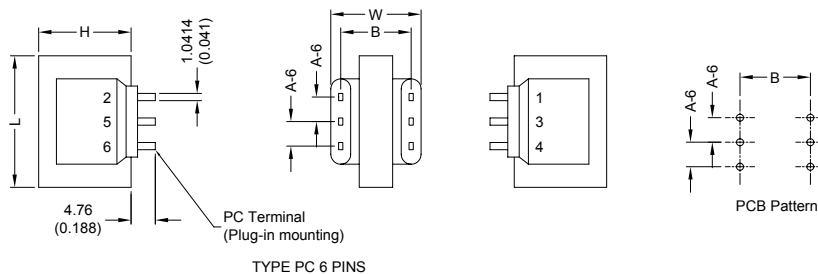

SIZE (VA)	L	W	H	A-6 6 PIN	B	WT. (gram)	OPTIONAL BRACKET *		
							NO.	MW	MD
24	41.28 (1.625)	57.90 (2.279)	34.93 (1.375)	10.16 (0.400)	53.34 (2.100)	474.87	24-BR	34.93 (1.375)	50.80 (2.000)

### 2. SCHEMATIC :

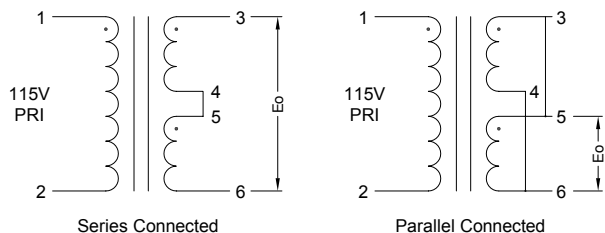

### 3. ELECTRICAL CHARACTERISTICS ( @ 25°C ) :

- a. Primary Voltage AC 115 V 60 Hz .
- b. No Load Primary Current Less Than 50mA .
- c. Secondary Voltage (±5%) Series AC - V .  
Parallel AC - V .
- d. Secondary Load Current Series 4000mA .  
Parallel 8000mA .
- e. Full Load Primary Current Less Than - mA .
- f. Full Load Secondary Voltage (±5%) Series 6.00V .  
Parallel 3.00V .
- g. DC Resistance  
Pin 1-2 Primary = 33.10 Ohm .  
Pin 3-4 Secondary = - Ohm .  
Pin 5-6 = - Ohm .
- h. Insulation Resistance DC 500V 100Meg Ohm Of More .
- i. Withstand Voltage (Hi-Pot) AC 1500V 60Hz 1 Minutes .
- j. Temperature Rise Less Than 60 Deg C .
- k. Core Size EI-41 x 39.00 m/m .

- l. Turns & Wire Gauge  
Primary Pin 1-2 Turns Diameter mm  
Secondary-1 Pin 3-4 Turns Diameter mm  
Secondary-2 Pin 5-6 Turns Diameter mm



**RoHS Compliant**

NOTE : Specifications subject to change without notice. Please check our website for latest information.

25.02.2008