



HIGH VOLTAGE CERAMIC DISC CAPACITOR - MINI *Suntan*®

TS16M

FEATURES

- Use for coupling, and by-pass circuit there are a stable and high reliability products

| CAP | TOL |
|-----------|------------------------------------|
| ≤5pF | A±0.1pF B±0.5pF |
| ≥5pF<10pF | C±0.25pF D±0.5pF |
| ≥10pF | J±5% K±10% M±20% Z+80-20% |

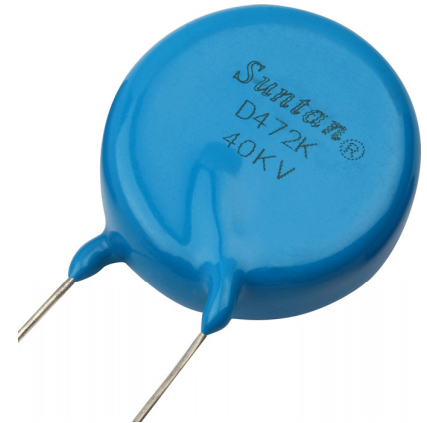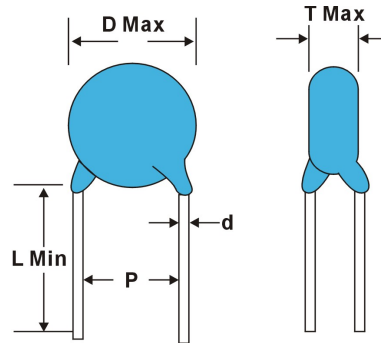

MINIATURE FINE SERIES

| RATED W. V | TEMP.CHARACTERISTICS & CAPACITANCE RANGE | | | | DIMENSION | | | |
|---------------|--|---------|---------|--------|-----------|--------|----|-----------------|
| | SL | Y5P(B) | Y5U(E) | Y5V(F) | D | P | T | d |
| 4KV | | | | 102 | 07 | 7.5~10 | 5 | 0.6 0.8 |
| | | 221~471 | 102 | 222 | 09 | | | |
| | | 561~681 | 222 | 472 | 11 | | | |
| | | 102 | 332~472 | 103 | 14 | | | |
| 6.3KV | | 221~471 | | 102 | 08 | 7.5~10 | 6 | 0.6 0.8 |
| | | 561~681 | 102 | 222 | 10 | | | |
| | | 102 | 222 | 472 | 13 | | | |
| | | 152~222 | 332~472 | 103 | 16 | | | |
| | | 332~472 | 103 | | 21 | | | |
| 8KV | | 221~471 | 102 | 102 | 10 | 7.5~10 | 7 | 0.6 0.8 |
| | | 681~102 | 222 | 222 | 13 | | | |
| | | 152~222 | 472 | 472 | 16 | | | |
| | | | | 103 | 22 | | | |
| 10KV | | 101~221 | | 102 | 09 | 10~12 | 8 | 0.8 |
| | | 471~561 | | 152 | 10 | | | |
| | | 681~102 | 102 | 222 | 13 | | | |
| | | 152 | 332 | 472 | 16 | | | |
| | | 222 | 682 | | 19 | | | |
| | | 332 | | 103 | 22 | | | |
| 15KV | | 101~221 | | 102 | 09 | 10~12 | 9 | 0.8 |
| | | 471~561 | 102 | 222 | 13 | | | |
| | | 102 | 222 | 472 | 16 | | | |
| 20KV | 10~30 | 201~271 | | 102 | 10 | 10 | 8 | 0.6 |
| | | 331~511 | 102 | 222 | 14 | 10 | 8 | 0.8 |
| | | 102 | 222 | 332 | 18 | 12.5 | 9 | 0.8 |
| | | | 472 | 103 | 24 | 12.5 | 9 | 0.8 |
| 30KV | | 102 | 472 | 103 | 26 | 15 | 12 | 1.5 |
| 40KV | | 102 | 332 | | 30 | 15 | 20 | 1.5 |
| 50KV | | 102 | 472 | | 36 | 15 | 22 | 1.5 |

Note: Specification are subject to change without notice. For more detail and update, please visit our website.