




ISOLATION TRANSFORMER FOR 10 BASE-T P/N: TS8023 LF DATA SHEET

Feature

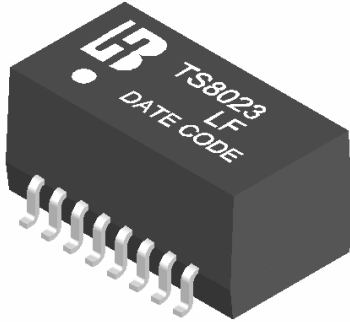

- Designed to Meet or exceed IEEE 802.3, 10 BASE-T Specifications.
- Surface mount, IC grade, transfer-molded package withstands 235 peak temperature profile.
- Available with common mode chokes for EMI suppression.
- Comply with RoHS requirements-whole part No Cd, No Hg, No Cr6+, No PBB and PBDE and No Pb on external pins.
- Comply with Air reflow profile of JEDEC 020C.
- Operation temperature range: 0°C to +70°C.
- Storage temperature range: -25 to +125 .


Electrical Specifications @ 25°C

Part Number	Turns Ratio(±5%)		Sine Wave Inductance (uH Min)	CWW (pF Max)
	TX	RX		
TS8023 LF	1CT: 2.5CT	1CT: 1CT	200	15


Continue

Part Number	L.L (uH Max)	DCR (max)	PRI pins (6-8)& (1-3)	HI-POT (Vrms)
TS8023 LF	0.5	0.4		2000

Schematic

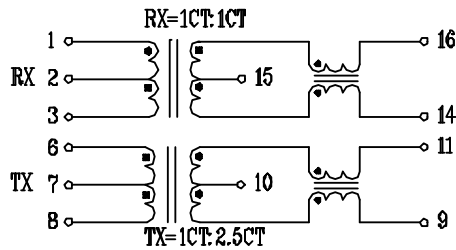

Mechanical

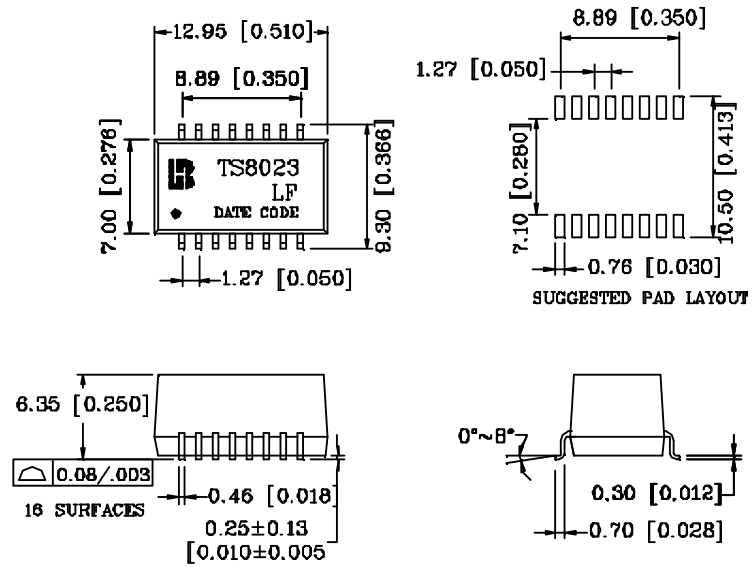

Units: mm [Inches] Tolerances: xx. x0±0.25 [0.010]
0.xx±0.05 [0.002]