


### Small Signal Diode



### Features

- ◊ Designed for mounting on small surface
- ◊ Extremely thin / leadless package
- ◊ Low capacitance
- ◊ Low forward voltage drop
- ◊ Pb free version and RoHS compliant
- ◊ Green compound (Halogen free) with suffix "G" on packing code and prefix "G" on date code

### Mechanical Data

- ◊ Case : 0603 Standard package, molded plastic
- ◊ Terminals: Gold plated, solderable per MIL-STD-750, Method 2026.
- ◊ High temperature soldering guaranteed: 260°C/10s
- ◊ Polarity : Indicated by cathode band
- ◊ Weight : 0.003 gram (approx.)

### Ordering Information

Part No.	Package	Packing	Marking	Packing code
TSS42U	0603	4K / 7" Reel	BD	RZ / RZG
TSS43U	0603	4K / 7" Reel	BE	RZ / RZG

### Maximum Ratings and Electrical Characteristics


Rating at 25°C ambient temperature unless otherwise specified.

### Maximum Ratings

Type Number	Symbol	Value	Units
Repetitive Peak Reverse Voltage	$V_{RRM}$	30	V
Reverse Voltage	$V_R$	30	V
RMS reverse Voltage	$V_{R(RMS)}$	21	V
Average Forward Current	$I_o$	200	mA
Repetitive Peak Forward Current	$I_{FRM}$	500	mA
Non-Repetitive Peak Forward Surge Current ( Singal Half -wave )	$I_{FSM}$	4.0	A
Power Dissipation	$P_D$	150	mW
Forward Voltage TS42U / 43U, IF = 200mA	$V_F$	1.00	V
TS42U, IF = 10mA		0.40	
TS42U, IF = 50mA		0.65	
TS43U, IF = 2mA		0.33	
TS43U, IF = 15mA		0.45	
Reverse Leakage Current $VR = 25V$	$I_R$	0.5	uA
Typical Capacitance between terminals ( $VR = 1V$ , $f = 1.0MHz$ )	$C_J$	10	pF
Reverse Recovery Time (Note 2.)	$T_{rr}$	5	nS
Thermal Resistance (Junction to Ambient)	$R_{\theta JA}$	667	°C/W
Operation Junction Temperature	$T_J$	125	°C
Storage Temperature Range	$T_J, T_{STG}$	-55 to + 125	°C

Notes: 1. The suggested Footprint dimensions have been provided for reference only, as actual pad layout may vary depending on application.

2. Test conditions:  $IF = IR = 10mA$ ,  $I_{rr} = 0.1 \times IR$ ,  $RL = 100 \Omega$

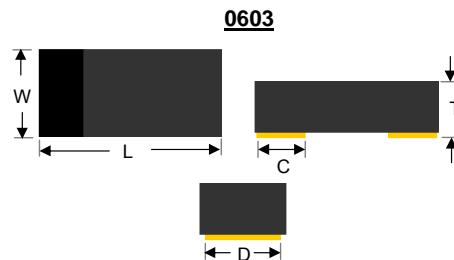


Dimensions	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
L	1.60	1.80	0.063	0.071
W	0.80	1.00	0.031	0.039
T	0.70	0.85	0.028	0.033
C	0.45 (Typical)	0.018 (Typical)		
D	0.7 (Typical)	0.27 (Typical)		

### Pin Configuration




### Suggested Footprint Dimensions

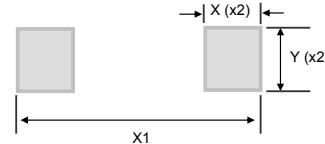


Dimensions	Value (in mm)
X1	2.70
Y	0.80
X	1.37

## RATINGS AND CHARACTERISTIC CURVES (TSS42U/TSS43U)


**Fig. 1 - Forward characteristics**

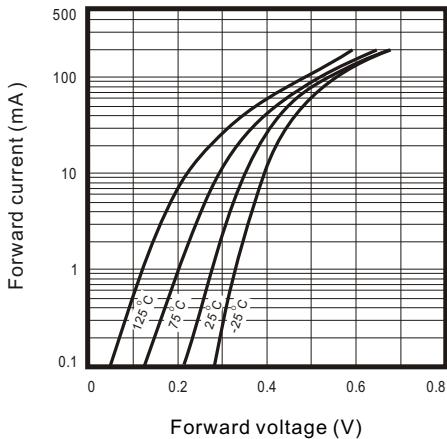

**Fig. 2 - Reverse characteristics**

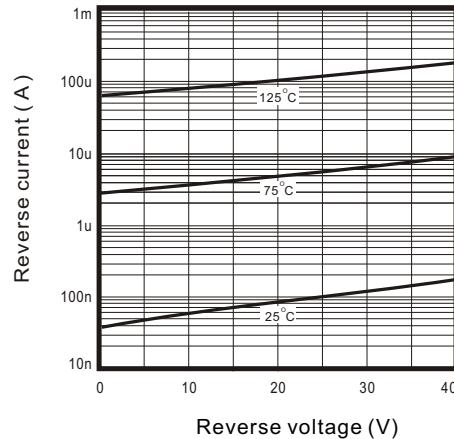

**Fig.3 - Capacitance between terminals characteristics**

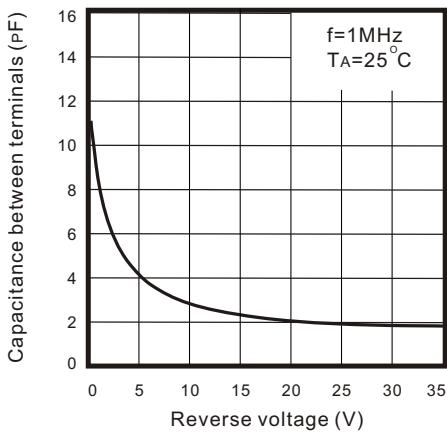

**Fig.4 - Current derating curve**

