



**SCHOTTKY BARRIER RECTIFIERS**

REVERSE VOLTAGE - 20 to 200 Volts  
FORWARD CURRENT - 1.0 Amperes


**FEATURES**

- Metal-Semiconductor junction with guard ring
- Epitaxial construction
- Low forward voltage drop
- High current capability
- The plastic material carries UL recognition 94V-0
- For use in low voltage,high frequency inverters,free wheeling,and polarity protection applications

**MECHANICAL DATA**

- Case : JEDEC DO-41 molded plastic
- Polarity : Color band denotes cathode
- Weight : 0.318 grams
- Mounting position : Any

**DO-41**

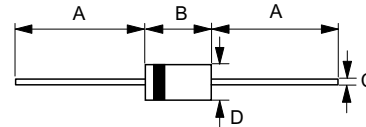

DO-41		
Dim.	Min.	Max.
A	25.4	-
B	4.20	5.20
C	0.70 $\varnothing$	0.90 $\varnothing$
D	2.00 $\varnothing$	2.70 $\varnothing$
All Dimensions in millimeter		

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25°C ambient temperature unless otherwise specified.  
Single phase, half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%

PARAMETER	SYMBOL	SB 120	SB 130	SB 140	SB 150	SB 160	SB 180	SB 1100	SB 1150	SB 1200	UNIT	
Maximum repetitive peak reverse voltage	$V_{RRM}$	20	30	40	50	60	80	100	150	200	V	
Maximum RMS voltage	$V_{RMS}$	14	21	28	35	42	56	70	105	140	V	
Maximum DC blocking voltage	$V_{DC}$	20	30	40	50	60	80	100	150	200	V	
Maximum average forward rectified current	$I_F$	1.0									A	
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	$I_{FSM}$	30.0									A	
Maximum Instantaneous Forward Voltage @ 1.0A	$V_F$	0.50			0.70		0.85		0.87	0.90	V	
Maximum DC Reverse Current @ TA=25°C at Rated DC Blocking Voltage @ TA=100°C	$I_R$	0.5					0.2					mA
		10.0					2.0					
Typical Junction Capacitance	$C_J$	70			50		40		30		pF	
Typical Thermal Resistance	$R_{\theta JA}$	70									°C/W	
Operating Temperature Range	$T_J$	-55 to +125									°C	
Storage Temperature Range	$T_{STG}$	-55 to +150									°C	



FIG. 1-TYPICAL FORWARD CURRENT DERATING CURVE

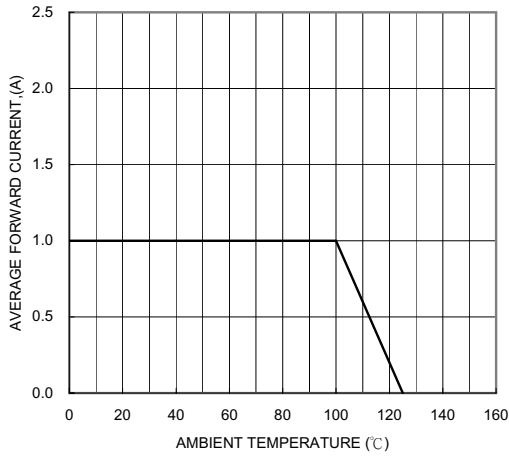


FIG. 2-TYPICAL FORWARD CHARACTERISTICS

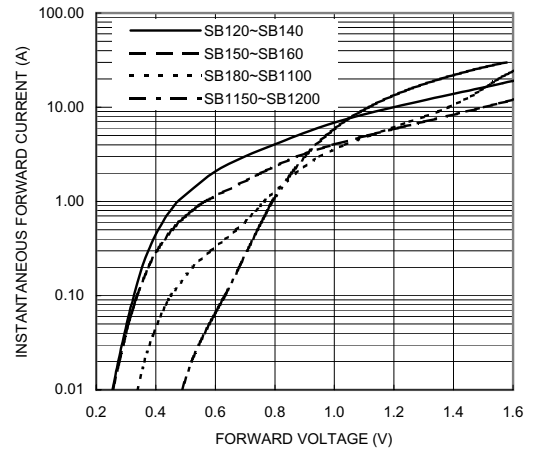


FIG. 3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

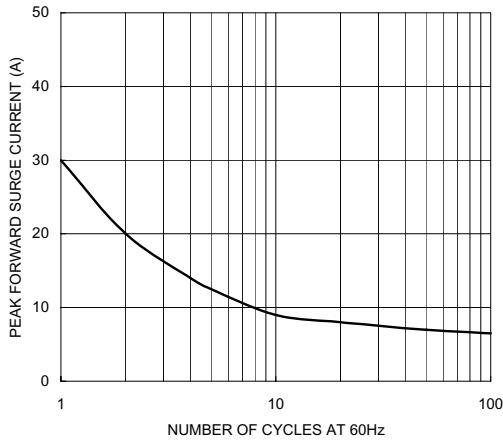


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

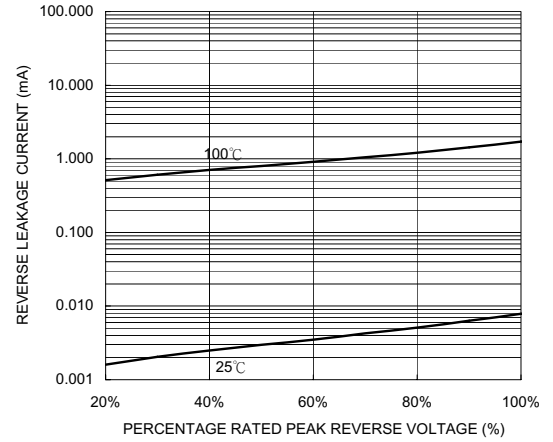


FIG. 5-TYPICAL JUNCTION CAPACITANCE

