

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [1120050016](#)
Status: **Active**
Description: DeviceNet card, PC/104, 1 channel

Documents:

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

General

| | |
|---------------------|-------------------------|
| Product Family | Network Interface |
| Series | 112005 |
| Approvals | N/A |
| Communication Speed | 1K to 500K bps |
| Mounting Style | N/A |
| Product Name | SST™ |
| Protocol | DeviceNet* Master/Slave |
| Type | Serial Card |

Physical

| | |
|-------------------------------|-----------------------------|
| Channels | 1 |
| Interface | CANopen* |
| Network Connection Type | CANopen* Connector (5 pin) |
| Packaging Type | Carton |
| Processor | 66 Mhz ColdFIRE per Channel |
| Temperature Range - Operating | 0°C to +55°C |

Electrical

| | |
|----------------|------|
| EMC | N/A |
| Supply Voltage | 5.2W |

Material Info

| | |
|-----------------|-------------------|
| Old Part Number | SST-DN3-104-1 (E) |
|-----------------|-------------------|

Reference - Drawing Numbers

| | |
|---------------|---------------|
| Sales Drawing | E-112005-0016 |
|---------------|---------------|

EU RoHS
ELV and RoHS
Compliant
REACH SVHC
Not Reviewed
Halogen-Free
Status
Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
[112005Series](#)

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION



BradCommunications™ SST™ DeviceNet™ Interfaces provide high-performance control and the support required for your DeviceNet applications.

SST™ Interfaces for DeviceNet

For Controlling and Monitoring DeviceNet Applications

Features


- High performance - DeviceNet protocol executed on the card
- Diagnostic LEDs
- UCMM (Unconnected Message Manager) capable; Group 1, 2, and 3 dynamic explicit connections supported
- Provides simultaneous execution of Group 2 Client (Master) and Server (Slave) operation
- Supports all DeviceNet standard baud rates: 125, 250, and 500 Kbaud
- Supports Poll, Strobe, Change of State (COS) and Cyclic I/O messaging
- Supports fragmented Explicit and I/O messages
- Provides Client (Master) explicit messaging to slave devices

OS and Drivers Supported

- Windows 2000 / XP drivers
- The Console; a grouping of software tools including OPC server configuration and diagnostic tools
- Open, documented memory map interface with example C source code and Windows 32-bit DLLs for custom driver development



BradCommunications SST
PCI bus DeviceNet interface

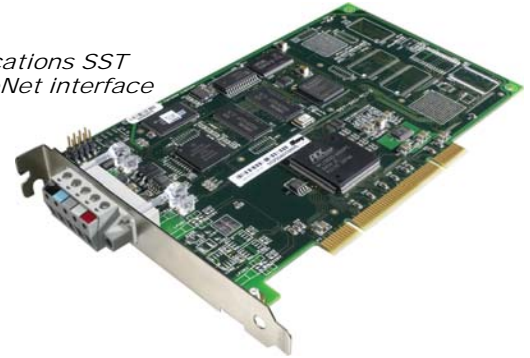

Overview

BradCommunications™ SST™ network interface cards are ideal for applications where high-performance control and reliability are required. Backed by superior support and service, BradCommunications network interfaces support a wide range of network protocols and bus formats.


BradCommunications SST network interface cards for DeviceNet can be found in many applications including:

- Operator Interface
- Human-Machine Interface
- PC Control
- Device Development
- Network Diagnostics


BradCommunications SST network interface cards for DeviceNet undergo DeviceNet conformance testing and support DeviceNet specifications; including all DeviceNet standard baud rates, Poll, Strobe, Change of State (COS) and Cyclic I/O messaging.

Software Tools


Software available for the SST DeviceNet Interface Cards enables fast integration of industrial communication into your application.



Configuration Console

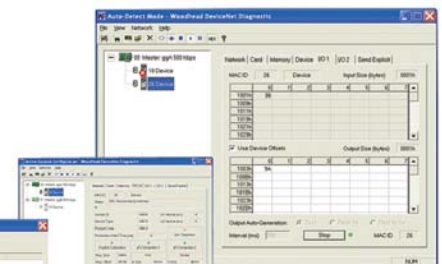

Diagnostic and Test Tools



OPC Browser



Hardware Specifications

| | PCI | PC/104 |
|--------------------------------|---|--|
| Bus Interface | 32-bit, 33 MHz, PCI universal 3.3/5V interface (compliant signaling with PCI v2.2) | 16-bit PC/104 interface (compliant with PC/104, spec 2.3) |
| Processor | 66 MHz ColdFire, per channel | |
| Memory | 128 bytes for PCI configuration | 256 KB of shared RAM per channel |
| Diagnostics | Bi-color LEDs showing card status PCI: health, communication PC/104: power, health, communication | |
| Interrupts | Hardware Plug & Play (32 Kbytes used per card) | Software selectable level IRQ 2/9,5,7,10,11,12,15; standard TTL drive |
| Dimensions (LxW) | Standard half-length | 9.588 cm x 9.017 cm (3.775 in x 3.550 in) |
| Consumption | 5.2 W | 5.0 W |
| Typical Current Draw | +5V, ± 5 % 1.03 A (2 channel) | +5V, ± 5 %, 1000 mA 2 channel |
| Voltage Requirements | 5 V | |
| Addressing: Memory | A 256 Kbytes window available per channel | 256K in a window of 8K, 16K, 32K, 64K, 128K or 256K bytes on even window boundary between 512K and 1Mb |
| Addressing: I/O | 8 bytes allocated per channel | 8 bytes on any even 8-bit boundary from 200h-2F8h or 600h-6F8h |
| Operating Temperature | 0° C (32° F) up to +55° C (131° F) | |
| Storage Temperature | -40° C (-40° F) up to +85° C (185° F) | |
| Humidity | 5% to 95% non-condensing | |
| Network Specifications: | | |
| Protocol | DeviceNet™ Master – Group 2 Client, Group 2 only Client DeviceNet Slave – Group 2 Server CAN 2.0 B Isolated CAN physical layer on each channel | |
| Cable | Shielded twisted pair, compatible with target network | |
| Connector | DeviceNet compliant 5-pin CAN connector | |
| External Power | 11-24 VDC, 50 mA typical | |
| Isolation | 500 V | |
| Data Rate | Up to 1 Mbaud for CAN 125K, 250K and 500K baud for DeviceNet | |
| RoHS Compliant | Yes | Yes |

Ordering Information

| SAP Material Number | Catalog Number | Product Description |
|---------------------|----------------------|---|
| 1120030013 | SST-DN3-PCU-1 | DeviceNet card, Universal PCI bus (3.3V / 5V), 1 channel |
| 1120030018 | SST-DN3-PCU-2 | DeviceNet card, Universal PCI bus (3.3V / 5V), 2 channels |
| 1120050016 | SST-DN3-104-1 | DeviceNet card, PC/104, 1 channel |
| 1120050024 | SST-DN3-104-2 | DeviceNet card, PC/104, 2 channels |
| Not required | SST-DN3-DIA† | DeviceNet diagnostic tool |
| 1120300007 | SST-DN3-CNF-U | DeviceNet software console with USB key (includes network analyzer) |
| 1120300006 | SST-DN3-CNF-P | DeviceNet software console with parallel port key (includes network analyzer) |
| 1120270014 | SST-DN3-OPC | OPC Data Server software (must purchase at least one SST- DN3-CNF) |

† Included with SST-DN3 interface cards

To contact us: www.woodhead.com

Reference Number: DW2006148 Date Published: December 2008

North America: US: + 1 800 225 7724 – Canada: +1 519 725 5136

Europe: France: +33 2 32 96 04 20 – Germany: +49 7252 94 96 0 – Italy: +39 010 59 30 77 – United Kingdom: +44 1495 356300

Asia: Shanghai, China: +86 21-5835-9885 - Tianjin, China: +86 22-23321717

Singapore: +65 6268-6868 – Yamato, Japan: +81 46-265-2428 – Nagoya, Japan: +81 52-221-5950

Brad
from **molex**

Brad is a registered trademark and BradCommunications and SST are trademarks of Molex Incorporated.
© 2008 Molex