

General Specifications

Resistive Element	Thick film
Substrate	Beryllium oxide ceramic
Terminal Finish	Thick film Silver
Operating Temperature	-55 to +150°C (see chart)

Tolerance is ± 0.010 ", unless otherwise specified. Designed to meet or exceed applicable portions of MIL-E-5400. All dimensions in inches.

Electrical Specifications


Resistance Value:	50 ohms, $\pm 2\%$
Power:	40 Watts
Frequency Range:	DC – 2.0 GHz
V.S.W.R.:	1.30:1

Specification based on unit properly installed using suggested mounting instructions and a 50 ohm nominal impedance. **Specifications subject to change without notice**


Features:

- 40 Watts
- Surface Mountable
- BeO Ceramic
- Non-Nichrome Resistive Element
- Low VSWR
- 100% Tested
- RoHS Compliant

Outline Drawing


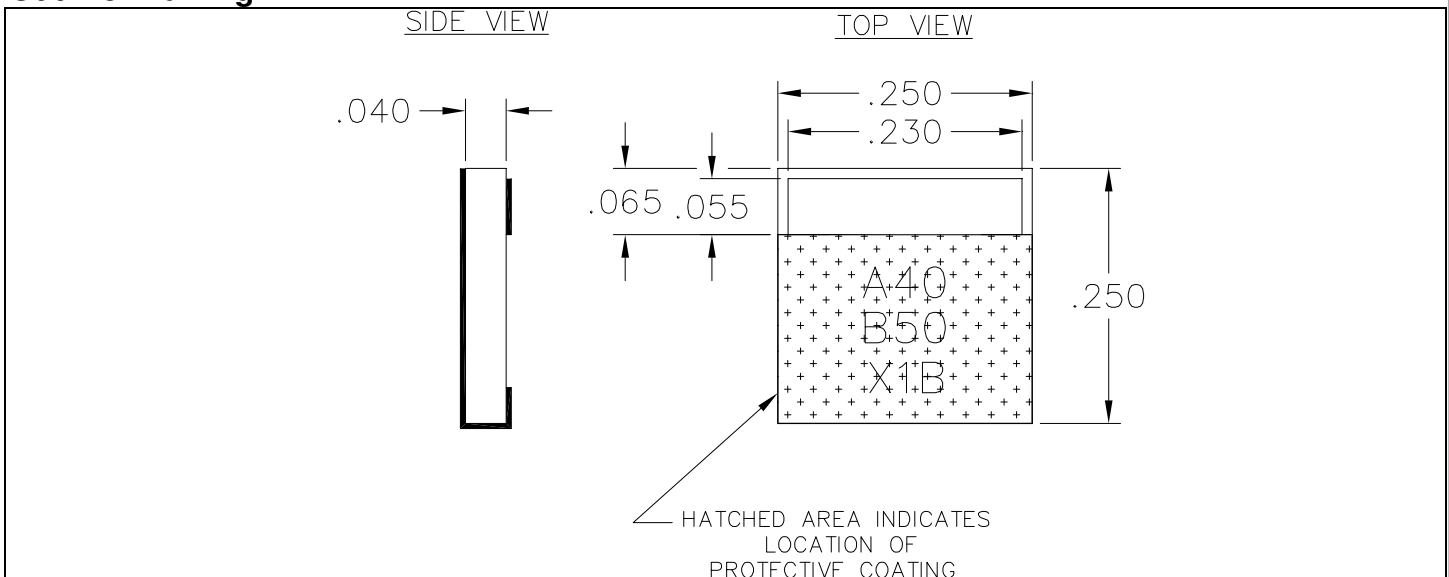


A40B50X1B (097) Rev B







Typical Performance:

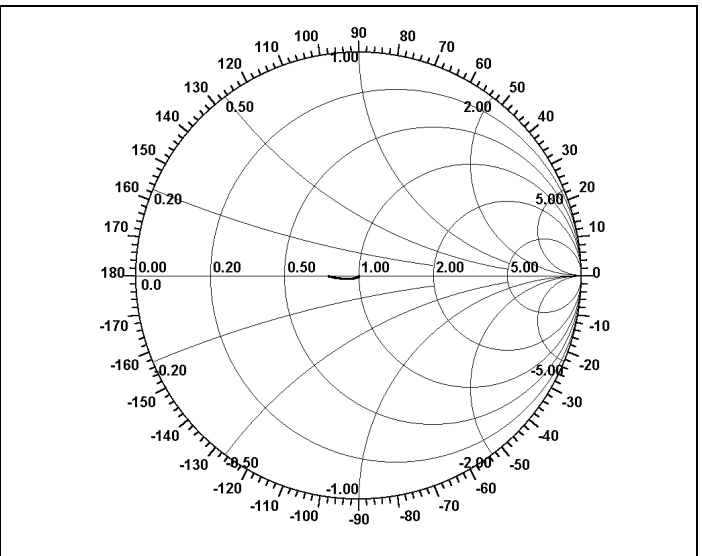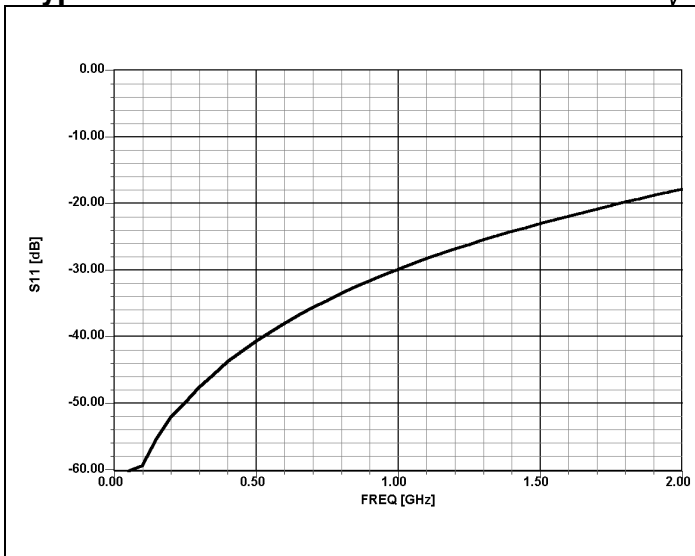

Power De-rating:

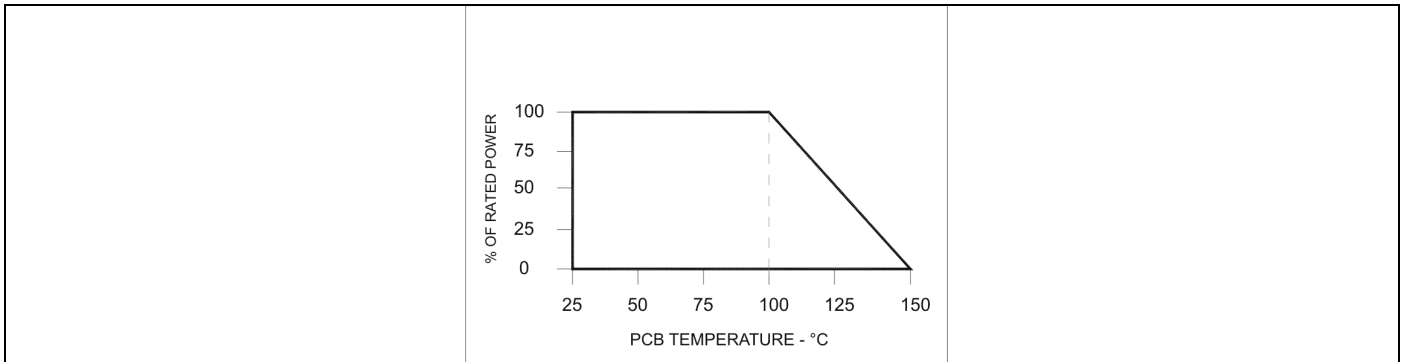

Mounting Procedure:

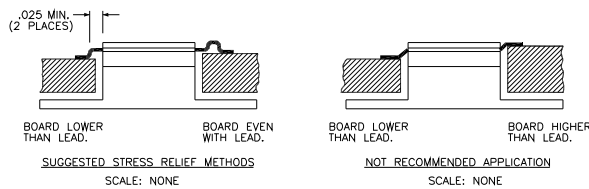


SUGGESTED MOUNTING PROCEDURES:

1. MAKE SURE THAT THE DEVICES ARE MOUNTED ON FLAT SURFACES (.001" UNDER THE DEVICE) TO OPTIMIZE THE HEAT TRANSFER.
2. POSITION DEVICE ON MOUNTING SURFACE AND SOLDER IN PLACE USING AN APPROPRIATE TYPE SOLDER.
3. SOLDER LEADS IN PLACE USING AN APPROPRIATE TYPE SOLDER WITH A CONTROLLED TEMPERATURE IRON (210°C).

A40B50X1B (097) Rev B

USA/Canada: (315) 432-8909
 Toll Free: (800) 544-2414
 Europe: +44 2392-232392

Available on Tape and
 Reel For Pick and Place
 Manufacturing.



Anaren
 What'll we think of next?™