




## Surface Mount Glass Passivated Ultrafast Rectifier

Reverse Voltage 50 to 400V  
Forward Current 0.5A

DO-213AA

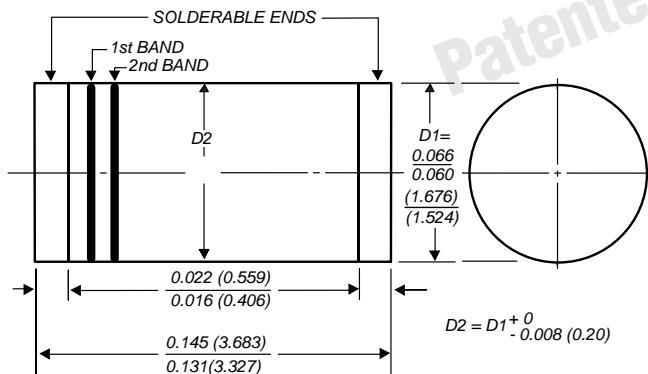

1st band denotes type and polarity  
2nd band denotes voltage type



Dimensions in inches  
and (millimeters)

\* Glass-plastic encapsulation  
is covered by Patent No. 3,996,602  
and brazed-lead assembly to  
Patent No. 3,930,306

### Features

- Plastic package has Underwriters Laboratories Flammability Classification 94V-0
- Capable of meeting environmental standards of MIL-S-19500
- High temperature metallurgically bonded construction
- Cavity-free glass passivated junction
- Fast switching for high efficiency
- High temperature soldering guaranteed: 450°C/5 seconds at terminals. Complete device submersible temperature of 260°C for 10 seconds in solder bath

### Mechanical Data

**Case:** JEDEC DO-213AA, molded plastic over glass body

**Terminals:** Plated terminals, solderable per MIL-STD-750, Method 2026

**Polarity:** Two bands indicate cathode end – 1st band denotes device type and 2nd band denotes repetitive peak reverse voltage rating

**Mounting Position:** Any **Weight:** 0.0014 oz., 0.036 g

### Maximum Ratings & Thermal Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

| Parameter  | Symbol                               | BYM07-50 | BYM07-100 | BYM07-150   | BYM07-200 | BYM07-300 | BYM07-400 | Unit |
|--|--------------------------------------|----------|-----------|-------------|-----------|-----------|-----------|------|
| Fast efficient device: 1st band is Green   |                                      | EGL34A   | EGL34B    | EGL34C      | EGL34D    | EGL34F    | EGL34G    |      |
| Polarity color bands (2nd Band)  |                                      | Gray     | Red       | Pink        | Orange    | Brown     | Yellow    |      |
| Maximum repetitive peak reverse voltage  | V <sub>RRM</sub>                     | 50       | 100       | 150         | 200       | 300       | 400       | V    |
| Maximum RMS voltage  | V <sub>RMS</sub>                     | 35       | 70        | 105         | 140       | 210       | 280       | V    |
| Maximum DC blocking voltage  | V <sub>DC</sub>                      | 50       | 100       | 150         | 200       | 300       | 400       | V    |
| Maximum average forward rectified current at T <sub>T</sub> = 75°C                               | I <sub>F(AV)</sub>                   |          |           |             | 0.5       |           |           | A    |
| Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) | I <sub>FSM</sub>                     |          |           |             | 10        |           |           | A    |
| Maximum full load reverse current, full cycle average at T <sub>A</sub> = 55°C                   | I <sub>R(AV)</sub>                   |          |           | 50          |           |           |           | µA   |
| Maximum thermal resistance (Note 1, 2)   | R <sub>θJA</sub><br>R <sub>θJT</sub> |          |           | 150         | 70        |           |           | °C/W |
| Operating junction and storage temperature range   | T <sub>J</sub> , T <sub>STG</sub>    |          |           | –65 to +175 |           |           |           | °C   |

### Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.


| Parameter   | Symbol          | BYM07-50 | BYM07-100 | BYM07-150 | BYM07-200 | BYM07-300 | BYM07-400 | Unit |
|---|-----------------|----------|-----------|-----------|-----------|-----------|-----------|------|
|   |                 | EGL34A   | EGL34B    | EGL34C    | EGL34D    | EGL34F    | EGL34G    |      |
| Maximum DC reverse current T <sub>A</sub> = 25°C<br>at rated DC blocking voltage T <sub>A</sub> = 125°C | I <sub>R</sub>  |          |           | 5.0       | 50        |           |           | µA   |
| Maximum instantaneous forward voltage at 0.5A   | V <sub>F</sub>  |          |           | 1.25      |           | 1.35      |           | V    |
| Max. reverse recovery time at I <sub>F</sub> = 0.5A, I <sub>R</sub> = 1.0A, I <sub>rr</sub> = 0.25A     | t <sub>rr</sub> |          |           | 50        |           |           |           | ns   |
| Typical junction capacitance at 4.0V, 1MHz  | C <sub>J</sub>  |          |           | 7.0       |           |           |           | pF   |

**Notes:** (1) Thermal resistance from junction to ambient, 0.24 x 0.24" (6.0 x 6.0mm) copper pads to each terminal  
(2) Thermal resistance from junction to terminal, 0.24 x 0.24" (6.0 x 6.0mm) copper pads to each terminal


Vishay Semiconductors  
formerly General Semiconductor

## Ratings and Characteristic Curves ( $T_A = 25^\circ\text{C}$ unless otherwise noted)


**Fig. 1 – Forward Current Derating Curve**

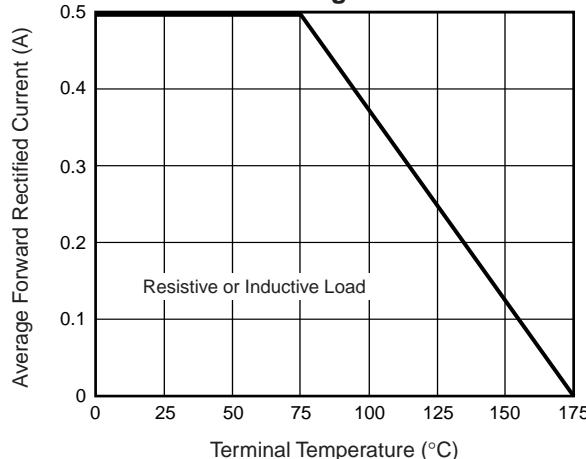


**Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current**

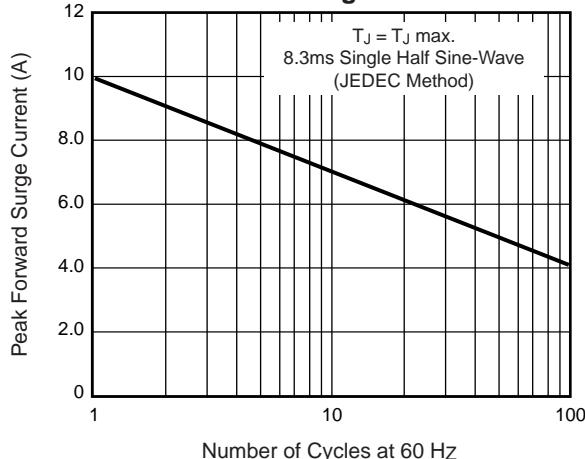


**Fig. 3 – Typical Instantaneous Forward Characteristics**

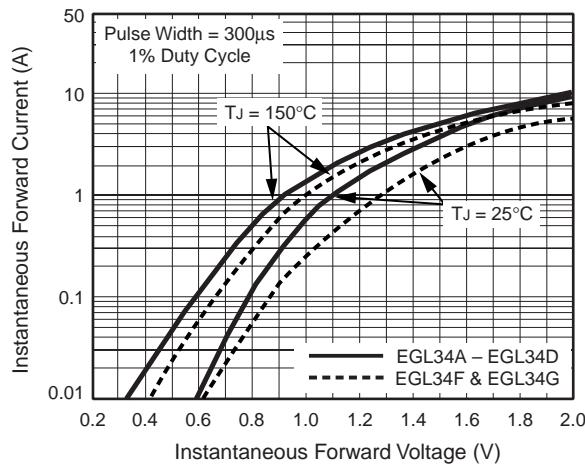

**Fig. 4 – Typical Reverse Characteristics**

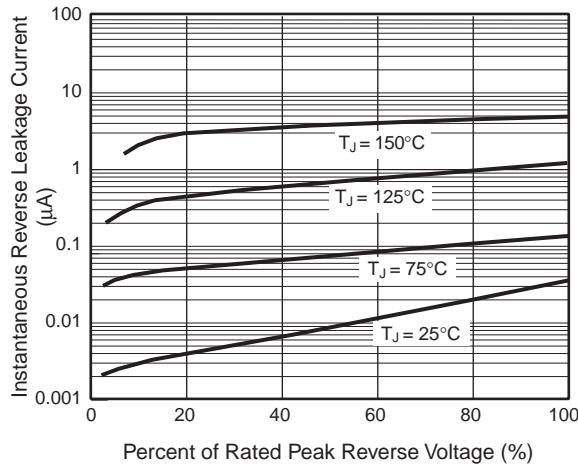

**Fig. 5 – Typical Junction Capacitance**

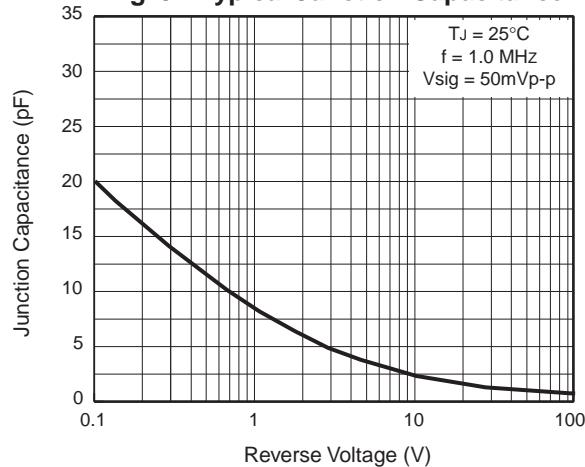

**Fig. 6 – Typical Transient Thermal Impedance**

