

# SMD Power Inductor CDH20D08



RoHS


Halogen  
Free




## Description

- Ferrite drum core construction.
- Magnetically Unshielded.
- L × W × H: 2.2 × 2.2 × 0.9 mm Max.
- Product weight: 10.5mg(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Halogen Free available.

## Dimension - [mm]

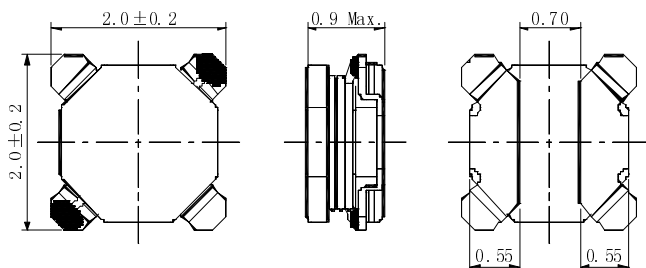

## Land pattern and Schematics - [mm]

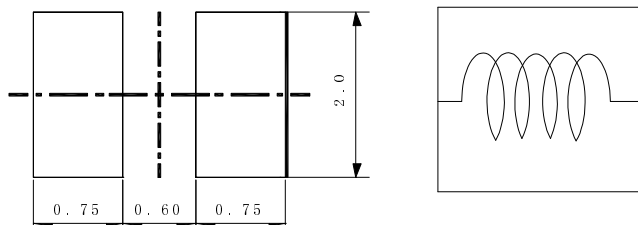

## Electrical Characteristics

Part name	Stamp	Inductance [ $\mu$ H] 1MHz	D.C.R.( $\Omega$ ) [Max.] (at 20°C)	Saturation current (A) ※1 (at20°C)	Temperature rise current (A) ※2
CDH20D08HF-R47NC	A	$0.47 \pm 30\%$	85m (67m)	1.89 (2.36)	1.44
CDH20D08HF-R68NC	B	$0.68 \pm 30\%$	134m (107m)	1.48 (1.85)	1.15
CDH20D08HF-1R0NC	C	$1.0 \pm 30\%$	182m (146m)	1.15 (1.44)	0.78
CDH20D08HF-1R5NC	D	$1.5 \pm 30\%$	275m (220m)	0.94 (1.18)	0.66
CDH20D08HF-2R2MC	E	$2.2 \pm 20\%$	368m (295m)	0.80 (1.00)	0.61
CDH20D08HF-3R3MC	F	$3.3 \pm 20\%$	585m (468m)	0.67 (0.84)	0.46
CDH20D08HF-4R7MC	G	$4.7 \pm 20\%$	700m (560m)	0.61 (0.76)	0.44
CDH20D08HF-6R8MC	J	$6.8 \pm 20\%$	1.011 (808m)	0.50 (0.63)	0.35
CDH20D08HF-8R2MC	K	$8.2 \pm 20\%$	1.215 (1.012)	0.45 (0.56)	0.29

※1. Saturation current: The value of D.C. current when the inductance decreases to 70% of its nominal value.










※2. Temperature rise current: The value of D.C. current when the temperature rise is  $\Delta t = 40^\circ\text{C}$  ( $T_a = 20^\circ\text{C}$ ).

# SMD Power Inductor CDH20D08



## Saturation Current & Temperature Rise Graph



— L (20°C)    —  $\Delta T$

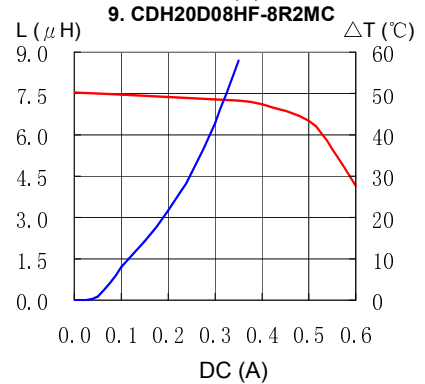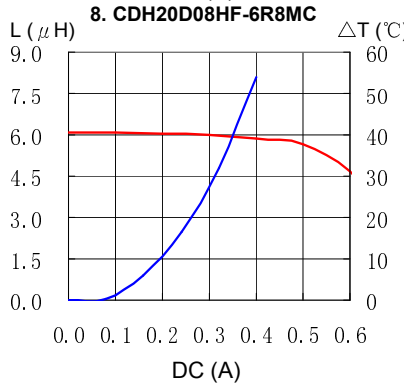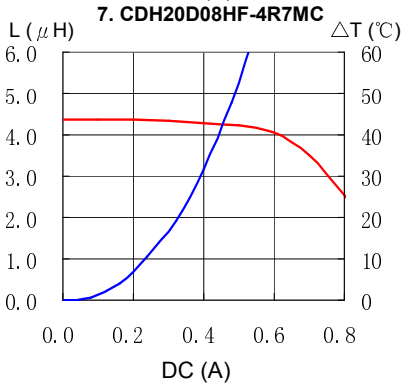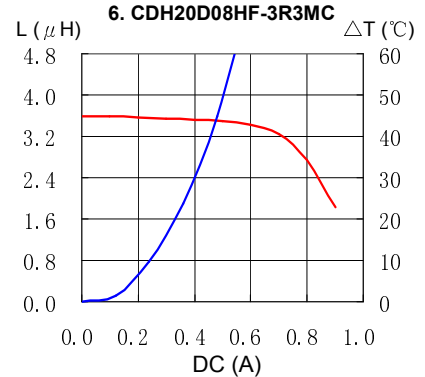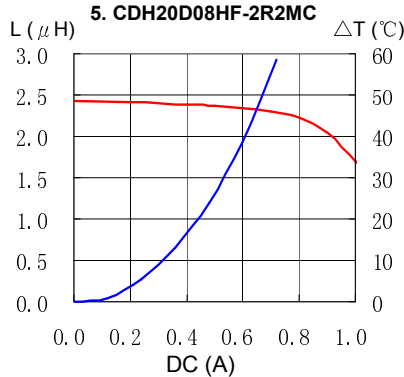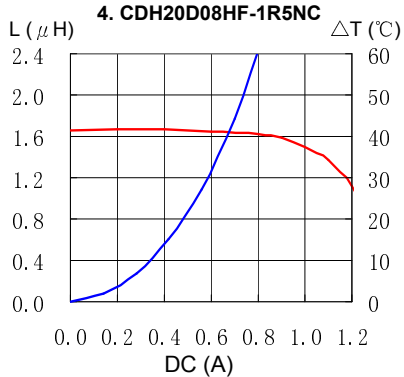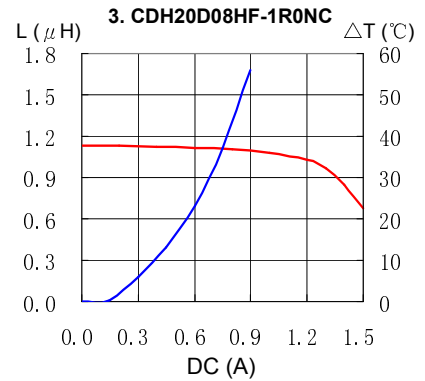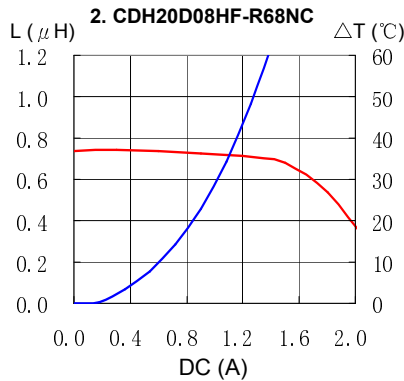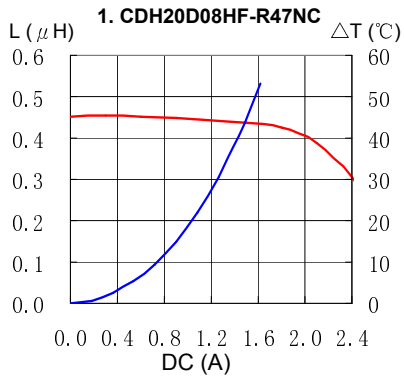

# SMD Power Inductor CDH20D08



## Solder Reflow Condition

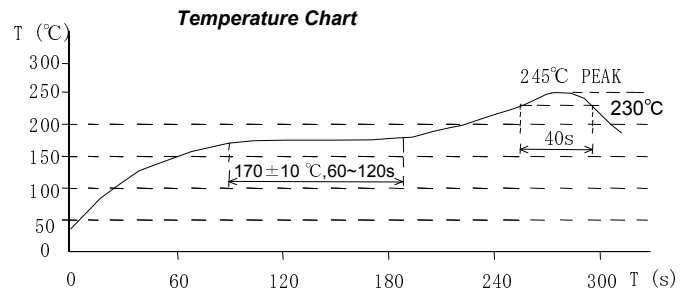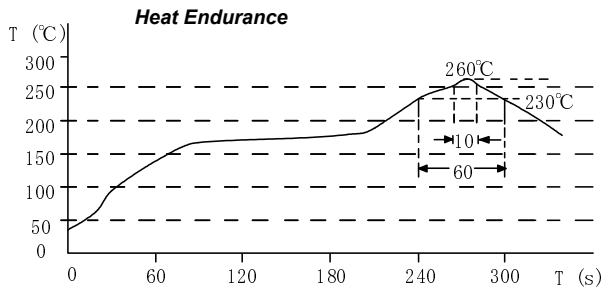

Please refer to the sales offices on our website - <http://www.sumida.com>

### Hong Kong

Tel.+852-2880-6688  
FAX.+852-2565-9600  
[sales@hk.sumida.com](mailto:sales@hk.sumida.com)

### Tokyo

Tel.+81-3-5202-7112  
FAX.+81-3-5202-7105  
[sales@jp.sumida.com](mailto:sales@jp.sumida.com)

### Chicago

Tel.+1-847-545-6700  
FAX.+1-847-545-6720  
[sales@us.sumida.com](mailto:sales@us.sumida.com)

### Shanghai

Tel.+86-021-5836-3299  
FAX.+86-021-5836-3266  
[shanghai.sales@cn.sumida.com](mailto:shanghai.sales@cn.sumida.com)

### Seoul

Tel.+82-2-6237-0777  
FAX.+82-2-6237-0778  
[sales@kr.sumida.com](mailto:sales@kr.sumida.com)

### Oberzell

Tel.+49-8591-937-0  
FAX.+49-8591-937-103  
[contact@sumida-eu.com](mailto:contact@sumida-eu.com)

### Shenzhen

Tel.+86-755-8291-0228  
FAX.+86-755-8291-0338  
[shenzhen.sales@cn.sumida.com](mailto:shenzhen.sales@cn.sumida.com)

### Singapore

Tel.+65-6296-3388  
FAX.+65-6296-3390  
[sales@sg.sumida.com](mailto:sales@sg.sumida.com)

### Neumarkt

Tel.+49-9181-4509-110  
FAX.+49-9181-4509-310  
[infocomp@eu.sumida.com](mailto:infocomp@eu.sumida.com)

### Taipei

Tel.+886-2-8751-2737  
FAX.+886-2-8751-2738  
[sales@tw.sumida.com](mailto:sales@tw.sumida.com)

### San Jose

Tel.+1-408-3219660  
FAX.+1-408-321-9308  
[sales@us.sumida.com](mailto:sales@us.sumida.com)